



**GENERAL** 

**CHSP1716S** Type 304 (18-8) stainless steel hand wash-up sink with 7" (178mm) high full length backsplash. Basin has 1-3/4" (45mm) radius coved corners. Exposed surfaces have a brushed finish. Furnished with stainless steel pedestal and and wall hanger.

Carries NSF International Certication.


(CHECK MODEL SPECIFIED)				MIXING
MODEL	FAUCET	DRAIN	TRAP	VALVE
CHSP1716SSACC	LKB722C	LK8	LK500	NONE
CHSP1716SSACMC	LKB722C	LK8	LK500	LK724
CHSP1716SSACTMC	LKB722C	LK8	LK500	LK723


**LKB722C** Sensor-operated, backsplash-mounted, non-mixing gooseneck faucet with adjustable sensor eyes. A continuous beam is emitted from sensor and faucet is activated when hands are placed under the spout. Water will flow as long as hands remain within sensor range. When hands are removed, the water stops automatically based on shut-off delay setting. The sensor then resets for the next user.

Chrome-plated solid brass construction with 2.0gpm laminar flow control on spout end. Includes water-resistant sensor control module and power cables. Features dual power options: AC plug-in and battery holder with four AA batteries.

Slow-closing piston operated solenoid valve, in-line filter with cleanout trap and flexible supply hose.

Control circuit is solid state, has adjustable sensor range of 7/8" (22mm) to 6-3/4" (171mm), shut-off delay preset to 1 second and field adjustable to 2 seconds (to prevent sink overflow).

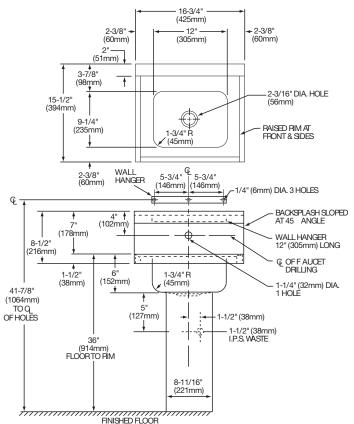




LK8 Chrome plated grid strainer with 1-1/2" (38mm) O.D. tailpiece.

**LK500** Satin chrome cast brass "P" trap with cleanout, chrome plated 1-1/2" (38mm) O.D. tubing waste arm to wall, and wall flange.

**LK723** Anti-scald thermostatic mixing valve with nickel-plated brass body 1/2" (13mm) SWT inlets and outlet connections, check valves on inlets and a mixed temperature range of 80°- 120 °F. Certified under ASSE1016.

**LK724** Mechanical mixing valve with C.P. brass body, 3/8" (10mm) compr ession inlets and outlet connections, and check valves on inlets.



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.



