



Technical Sheet

Universal RADII™ Bi-Level Modular Fountain

- M8CR
- M12CR
- MCR

Suggested Specification

Model M8CR shall deliver 8.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model M12CR shall deliver 12.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model MCR is a non-refrigerated unit. Shall include two vandal-resistant antimicrobial copper push buttons to activate the flow of water and a low flow one piece bubbler with flexible guard. The fountains shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



Models

M8CR delivers 8.0 gph of chilled drinking water.
 M12CR delivers 12.0 gph of chilled drinking water.
 MCR is a non-refrigerated unit.

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Two vandal-resistant antimicrobial push buttons
- Waterways are Lead-Free in materials & construction
- Flexible bubbler guard
- Brushed stainless steel finish
- Universal design: high right or high left
- High efficiency cooling system

Finishes

- Standard cabinet finish: Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Frame allows for universal installation
- Recessed mounting frame included, but water supply and drain required

Options

- One piece chrome plated brass bubbler (036700-001)
- ADA cane apron (036707-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
 Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Antimicrobial Copper - EPA Registration No. 89187-3
- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING:
 Cancer and Reproductive Harm
www.P65Warnings.ca.gov




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot*N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8CR	8.0	8.0	No	No	1/4	4.8	500	No	No	161 Lbs
M12CR	12.0	12.0	No	No	1/3	5.5	550	No	No	176 Lbs
MCR	Fountain Only							No	No	110 Lbs

*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® RADII™ B-LEVEL MODULAR MODEL

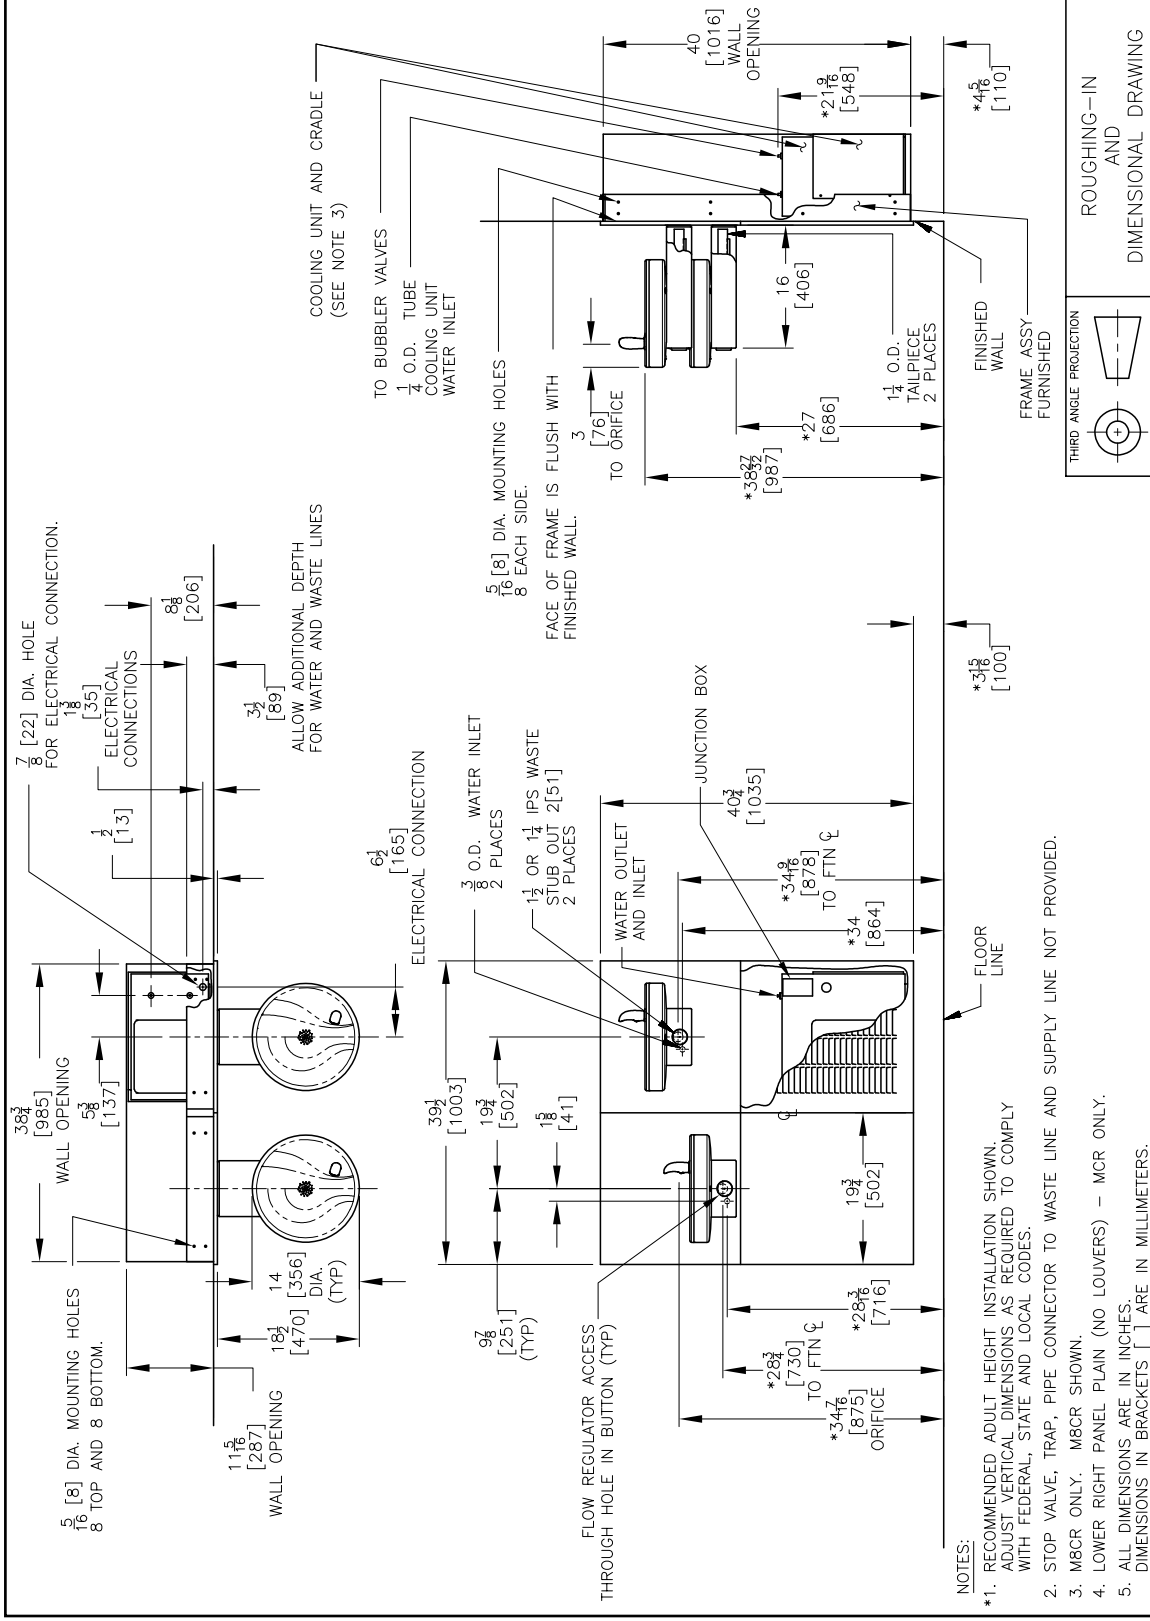

OASIS INTERNATIONAL
 222 East Campus View Blvd.
 Columbus, OH 43235
www.oasiscoolers.com
 1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition
 ASC0031-F-1912