

Elkay ezH2O Bottle Filling Station with Mechanically Activated Single ADA Cooler Non-Filtered Refrigerated Light Gray

Model EMABF8WSLK

PRODUCT SPECIFICATIONS

Elkay ezH2O® Bottle Filling Station with Mechanically Activated Single ADA Cooler Non-Filtered Refrigerated Light Gray. Chilling Capacity of 8.0 GPH (gallons per hour) of 50° F drinking water, based on 80° F inlet water and 90° F ambient, per ASHRAE 18 testing. Features shall include Antimicrobial*, Green Ticker™, Hands Free, Laminar Flow, Mechanically Activated, Real Drain. Furnished with Flexi-Guard ® Safety Bubbler. Electronic Bottle Filler Sensor with Mechanical Front and Side Bubbler Pushbar activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120.

Special Features:	Antimicrobial, Green Ticker™, Hands	
	Free, Laminar Flow, Mechanically	
	Activated, Real Drain	
	,	
Finish:	Light Gray Granite	
Power:	115V/60Hz	
Bubbler Style:	Flexi-Guard ® Safety Bubbler	
Activation by:	Electronic Bottle Filler Sensor with	
_	Mechanical Front and Side Bubbler	
	Pushbar	
Mounting Type:	Wall Mount (On Wall)	
Chilling Capacity*:	8.0 GPH	
Full Load Amps	6	
Rated Watts:	370	
Dimensions (L x W x H):	17-7/8" x 18-1/2" x 39-3/4"	
Approx. Shipping Weight:	91 lbs.	
Installation Location:	Indoor	
No. of Stations Served:	1	
*Based on 80° F inlet water & 90° F ambient air temp for 50° F chilled		

- drinking water. Mechanically-Activated bubbler continues to supply water in event of service disruptions.
- Green Ticker: Informs user of number of 20 oz. plastic water bottles saved from waste.
- Laminar flow provides clean fill with minimal splash.
- Key plastic components are manufactured with silver ion antimicrobial agent helping to provide clean, stain- and odor-free surfaces.
- Real Drain System eliminates standing water.
- *Antimicrobial claims are in refence to components manufactured antimicrobial agents, helping to provide clean, stain- and odor-free surfaces.

COOLING SYSTEM

- Compressor: Hermetically-sealed, reciprocating type, single phase. Sealed-in lifetime lubrication.
- Condenser: Fan cooled, copper tube with aluminum

PART:	QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
APPROVAL:	



Included with Product:

Water Cooler (EMABF8WSL). **Bottle Filler (EZWSR)**

▼ Ships in multiple boxes.

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

PRODUCT COMPLIANCE

ADA & ICC A117.1 ASME A112.19.3/CSA B45.4 Buy American Act

CAN/CSA C22.2 No. 120

GreenSpec®

NSF/ANSI 61 & 372 (lead free)

UL 399







5 Year Limited Warranty on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Warranty (PDF)

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Elkay ezH2O Bottle Filling Station with Mechanically Activated Single ADA Cooler Non-Filtered Refrigerated Light Gray

Model EMABF8WSLK

fins. Fan motor is permanently lubricated.

- Cooling Unit: Combination tube-tank type. Continuous copper tubing with is fully insulated with EPS foam that meets UL requirements for self-extinguishing material.
- Refrigerant Control: Refrigerant R-134a is controlled by accurately calibrated capillary tube.
- Temperature Control: Easily accessible enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirements.

Optional Accessories		
EWF3000	Elkay Universal Filtration Kit (3000-Gallon) Spec Sheet (PDF)	
MLP100	In-wall Carrier for Single-station On-wall Bottle Fillers Coolers & Fountains Spec Sheet (PDF)	
<u>98313C</u>	Elkay Cane Apron for EMABF (Gray Granite) Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Elkay ezH2O Bottle Filling Station with Mechanically Activated Single ADA Cooler Non-Filtered Refrigerated Light Gray

Simply push in tube to attach

Model EMABF8WSLK

|Tube is secured | Push in collet to

release tube

- 0407

OPERATION OF QUICK CONNECT FITTINGS

in position

IMPORTANT! INSTALLER PLEASE NOTE:

This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways. The grounding of electrical requipment such as telephone, computer, etc. to water lines is a common procedure. The grounding may be in the building but may also occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which creates a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by installing the cooler using the proper materials as shown

NOTICE

This water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.

17-7/8'

(454mm)

(178mm)

11/16

(18mm)

2-7/16

(63mm) 3-1/2'

(89mm)

4-1/2

(114mm)

10"

(254mm)

2-1/2'

(64mm)

(178mm)

Bottle filler unit on bracket attached to wall by 6 holes (as shown). Water and electrical will connect through pre-punched hole in basin.

These products are designed to operate on 20 psi to 105 psi supply line pressure.

Ø 7/16" (11mm)MOUNTING HOLES(6)

ACTIVATION

SENSOR

5-3/4"


(146mm)

1-3/8 (35mm)

В

D

Ø 5/16" (8mm) (5)-

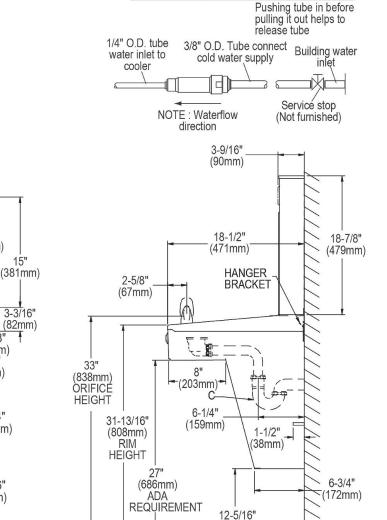

(313mm)

52-1/16"

(1323mm)

39-1/16'

(991mm)

(787mm)

(635mm)

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube. Up to 3" (76mm) maximum out from wall. B = Recommended Waste Outlet location. To accommodate 1-1/4" nominal drain. Drain stub 2" (51mm) out from wall.

13-7/8"

(352mm)

5-3/4"

(146mm)

1-3/8"

(35mm) 4-9/16"

7-1/4"

(185mm)

2-9/16"

(65mm)

REDUCE HEIGHT BY 3 INCHES FOR INSTALLATION OF CHILDRENS ADA COOLER

FINISHED

FLOOR

(116mm)

Ε

C = 1-1/4" Trap (not furnished).

D = Electrical Supply (3) Wire Recessed Box Duplex Outlet.

21-3/8"

(543mm)

E = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.

5"

(127mm)

F = 7/16" (11mm) Bolt Holes for fastening to wall

NOTE: New Installations Must Use Ground Fault Circuit Interrupter (GFCI).

18-3/8"

(467mm)

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.