

SPECIFICATIONS


GENERAL

ESLV2820 #16 gauge, type 304 (18-8) stainless steel surgeon's lavatory with integral instrument trays. Lavatory compartment has 1-3/4" (44mm) radius vertical and horizontal coved corners. Exposed surfaces are hand blended to a uniform satin luster finish. Underside is sound deadened. Furnished with stainless steel support brackets.

(CHECK MODEL SPECIF	MIXING		
MODEL	FAUCET	DRAIN	VALVE
☐ ESLV2820SACC	LKB721C	LK9	NONE
☐ ESLV2820SACMC	LKB721C	LK9	LK724
☐ ESLV2820SACTMC	LKB721C	I K9	I K723

LKB721C Sensor-operated, deck-mounted, non-mixing gooseneck faucet with adjustable sensor eyes. A continuous beam is emitted from sensor and faucet is activated when hands are placed under the spout. Water will flow as long as hands remain withinsensor range. When hands are removed, the water stops automatically based on shut-off delay setting. The sensor then resets for the next user.

Chrome-plated solid brass construction with 2.0gpm laminar flow control on spout end. Includes water-resistant sensor control module and power cables. Features dual power options: AC plug-in and battery holder with four AA batteries. Slow-closing piston operated solenoid valve, in-line filter with clean out trap and flexible supply hose. Control circuit is solid state, has adjustable sensor range of 7/8" (22mm) to 6-3/4" (171mm), shut-off delay preset at 1 second and field adjustable to 2 seconds (to prevent sink overflow).




LK9 Chrome plated grid strainer with 1-1/4" (32mm) O.D. tailpiece.

LK723 Anti-scald thermostatic mixing valve with nickel-plated brass body 1/2" (13mm) SWT inlets and outlet connections, check valves on inlets and a mixed temperature range of 80°-120°F. Certified under ASSE1016.

LK724 Mechanical mixing valve with C.P. brass body, 3/8" (10mm) compression inlets and outlet connections, and check valves on inlets.

DIMENSIONS

Model	Α		В		С		D		E		F		G		Н		I		J	
Number	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
ESLV2820	28	711	20	508	33/4	95	12	305	14	356	3	76	21/4	57	1	25	6	152	11/2	38

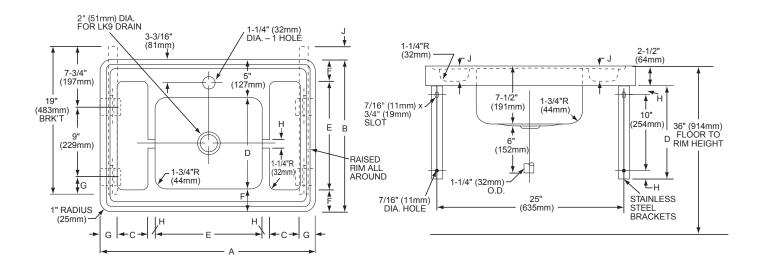

In keeping with our policy of continuing product improvement, Elkayreserves the right to change product specifications without notice.



ROUGH-IN DIMENSIONS

