Halsey Taylor. SPECIFICATIONS

Halsey Taylor Endura II Tubular Outdoor Fountain Pedestal Non-Filtered Non-Refrigerated Model 4400

PRODUCT SPECIFICATIONS

Halsey Taylor Endura II[™] Tubular Outdoor Fountain, Pedestal Non-Filtered Non-Refrigerated. Features shall include 316 Stainless, Heavy Duty Vandal Resistant. Furnished with Vandal Resistant bubbler. Front Button activation. Product shall be Floor Mount/Freestanding, for Outdoor applications, serving 1 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Special Features:	316 Stainless, Heavy Duty Vandal Resistant	
Finish:	Beige (BGE), Black (BK), Blue (BLU), Brown (BRN), Evergreen (EVG), Gray (GRY), Orange (ORN), Powder Coat (12 Color Options), Purple (PUR), Red (RED), Terracotta (TER), White (WHT), Yellow (YLW)	
Bubbler Style:	Vandal Resistant	
Activation by:	Front Button	
Mounting Type:	Floor Mount/Freestanding	
Chilling Capacity:	Non-refrigerated	
Approx. Shipping Weight:	134 lbs.	
Installation Location:	Outdoor	
No. of Stations Served:	1	
++1A/I I' I		

**When used in non-temperature controlled environments, unit(s) must be adequately winterized and/or protected from extreme heat to prevent damage where climates dictate.

 Base material constructed from marine-grade 316 stainless steel provides the ultimate corrosion protection from even the most corrosive elements.



Ships in one box.

AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



PRODUCT COMPLIANCE

ASME A112.19.3/CSA B45.4 Buy American Act NSF/ANSI 61 & 372 (lead free)



Installation Instructions (PDF)

Warranty pertains to drinking water applications only. Nondrinking water applications are not covered under warranty. <u>Warranty (PDF)</u>

QTY:

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Halsey Taylor Endura II Tubular Outdoor Fountain Pedestal Non-Filtered Non-Refrigerated Model 4400

Optional Accesso	pries	
<u>4471LHB</u>	Locking Hose Bib Spec Sheet (PDF)	
<u>97890C</u>	Accessory - Direct Bury Adaptor Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Halsey Taylor. SPECIFICATIONS

Halsey Taylor Endura II Tubular Outdoor Fountain Pedestal Non-Filtered Non-Refrigerated Model 4400

OPERATING PRESSURES:

Supply water 20 - 105 psi maximum

MOUNTING INSTRUCTIONS and PLUMBING CONNECTIONS


Refer to diagrams for plumbing rough-in. This fountain is to be mounted on a smooth, flat finished wall surface with adequate support. **Note:** Wall mounting structure must be capable of supporting 300lb. load minimum on fountain. To secure unit, use 3/8 minimum fasteners (not provided). Water service line and waste line are to be assmbled as required. Final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.)

Installation requires trap to be installed in wall. A service supply stop must be installed at the fountain inlet line. Trap and service stop not included.


Caution - Fountain must be securely bolted to wall.

Note: For wall support required locations see installation instructions provided with fountain.





FRONT VIEW

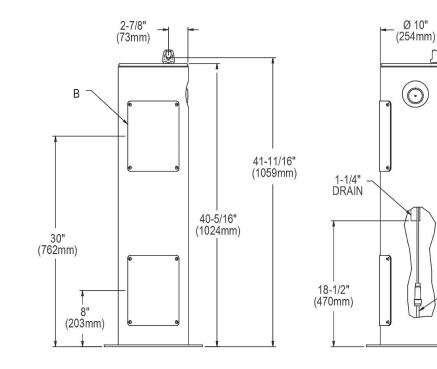

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT SHUT OFF VALVE BY OTHERS B = ACCESS PANEL (8" x 10")

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.