# Halsey Taylor. SPECIFICATIONS

## Halsey Taylor Endura II Outdoor HydroBoost Bottle Filling Station Wall Mount Non-Filtered Non-Refrigerated Model 4405BF

### PRODUCT SPECIFICATIONS

Halsey Taylor Endura II<sup>™</sup> Outdoor HydroBoost® Bottle Filling Station Wall Mount Non-Filtered Non-Refrigerated. Features shall include 316 Stainless, Heavy Duty Vandal Resistant, Laminar Flow. Mechanical Bottle Filler Button activation. Product shall be Wall Mount (On Wall), for Outdoor applications, serving 1 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Special Features:	316 Stainless, Heavy Duty Vandal Resistant, Laminar Flow		
Finish:	Beige (BGE), Black (BK), Blue (BLU), Brown (BRN), Evergreen (EVG), Gray (GRY), Orange (ORN), Powder Coat (12 Color Options), Purple (PUR), Red (RED), Terracotta (TER), White (WHT), Yellow (YLW)		
Power:	No Electrical Required		
Activation by:	Mechanical Bottle Filler Button		
Mounting Type:	Wall Mount (On Wall)		
Chilling Capacity:	Non-refrigerated		
Approx. Shipping Weight:	91 lbs.		
Installation Location:	Outdoor		
No. of Stations Served:	1		
**/When used in non-temperature controlled environments, unit(a) must			

\*\*When used in non-temperature controlled environments, unit(s) must be adequately winterized and/or protected from extreme heat to prevent damage where climates dictate.

- Mechanically-Activated bubbler continues to supply water in event of service disruptions.
- Laminar flow provides clean fill with minimal splash.
- Base material constructed from marine-grade 316 stainless steel provides the ultimate corrosion protection from even the most corrosive elements.

Evergreen	Blue	Purple	Red	Terracotta	Orange
(EVG)	(BLU)	(PUR)	(RED)	(TER)	(ORN)
Yellow	Black	Brown	Gray	Beige	White
(YLW)	(BLK)	(BRN)	(GRY)	(BGE)	(WHT)

### Ships in one box.

AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



ADA & ICC A117.1

Buy American Act

GreenSpec<sup>®</sup>

NSF/ANSI 61 & 372 (lead free)



Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

### Installation Instructions (PDF)

Warranty pertains to drinking water applications only. Nondrinking water applications are not covered under warranty. <u>Warranty (PDF)</u>

PART:	_QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


#### **MOUNTING INSTRUCTIONS and** PLUMBING CONNECTIONS

Refer to diagrams for plumbing rough-in. This fountain is to be mounted on a smooth, flat finished wall surface with adequate support.


Note: Wall mounting structure must be capable of supporting a 300 lb. load minimum on fountain. To secure unit, use 3/8" minimum fasteners (not provided). Water service line and waste line are to be assembled as required. Final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.) Installation requires trap to be installed in wall. A service supply stop must be installed at the fountain inlet line. Trap and service stop not included.

Caution - Fountain must be securely bolted to wall.

NOTE: For wall support required locations see installation instructions provided with fountain.



OPERATING PRESSURES: Supply water 20 – 105 psi maximum

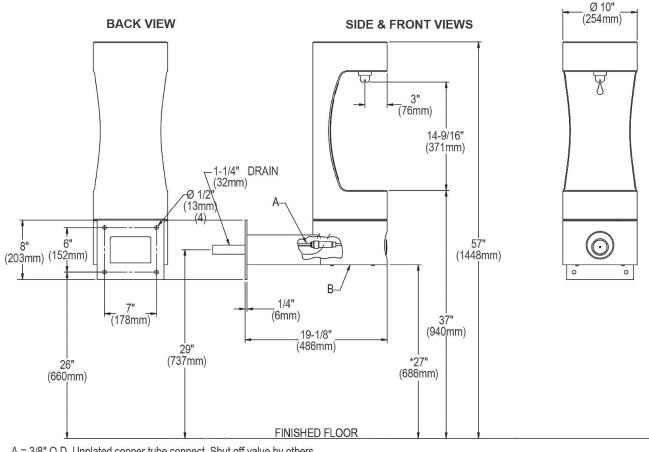

A = 3/8" O.D. Unplated copper tube connect. Shut off valve by others. B = Access panel(8"  $\times 10$ ")

\* ADA Requirement

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, guality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.