



OASIS INTERNATIONAL

AQUA POINTE™

HANDS FREE, WALL MOUNTED
SPORTS BOTTLE FILLER

PWSMEBF

Suggested Specification

Model PWSMEBF shall deliver water at 90°F ambient and 80°F inlet water. Water flow to the bottle filler is by means of an electronically activated solenoid. Bottle filler is hands free and offers bottle counter and integrated filter monitor. Key AquaPointe bottle filler component contain FRESHSHIELD which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Shall comply with ANSI A117.1 and ADA.

Model

PWSMEBF is a non-refrigerated, hands free wall mounted bottle filler and can be used in conjunction with a remote chiller.

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-free in materials and construction
- Heavy duty steel frame
- Hands free bottle filler with 20 second shutoff, integrated counter and filter monitor
- Built in drain - NO drip tray to empty

Installation

- Prior to roughing, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- P-trap not included. See plumbing code for local requirements



Surface Mount

Options (at additional cost)

- Mechanical Version
- Remote Chiller
- Replacement Filter (034763-216)
- Oasis Green Filter System

Finishes

Standard cabinet finish: Brushed Stainless Steel

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

ADA compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach. Fountain is ADA compliant for Adults in Wheelchairs.

Product certified to NSF/ANSI standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's health and safety code section 116875 (commonly known as AB1953). The green filter has been tested to ANSI/NSF standards 42 not by NSF.

Models covered by this specification comply with all known plumbing codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.



Model	50° F Drinking Water 90° F Ambient Air Temp*		115 Volts, 60 HZ			Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Compr. HP	Full Load Amps	Rated Watts		
PWSMEBF	0.0	0.0	-	-	-	No	6 Lbs.



*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice


OASIS® VersaFiller® Hands-Free Bottle Filler Model PWSMEBF

NOTES:

1. TRAP AND STOP VALVE NOT FURNISHED.
- *2. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

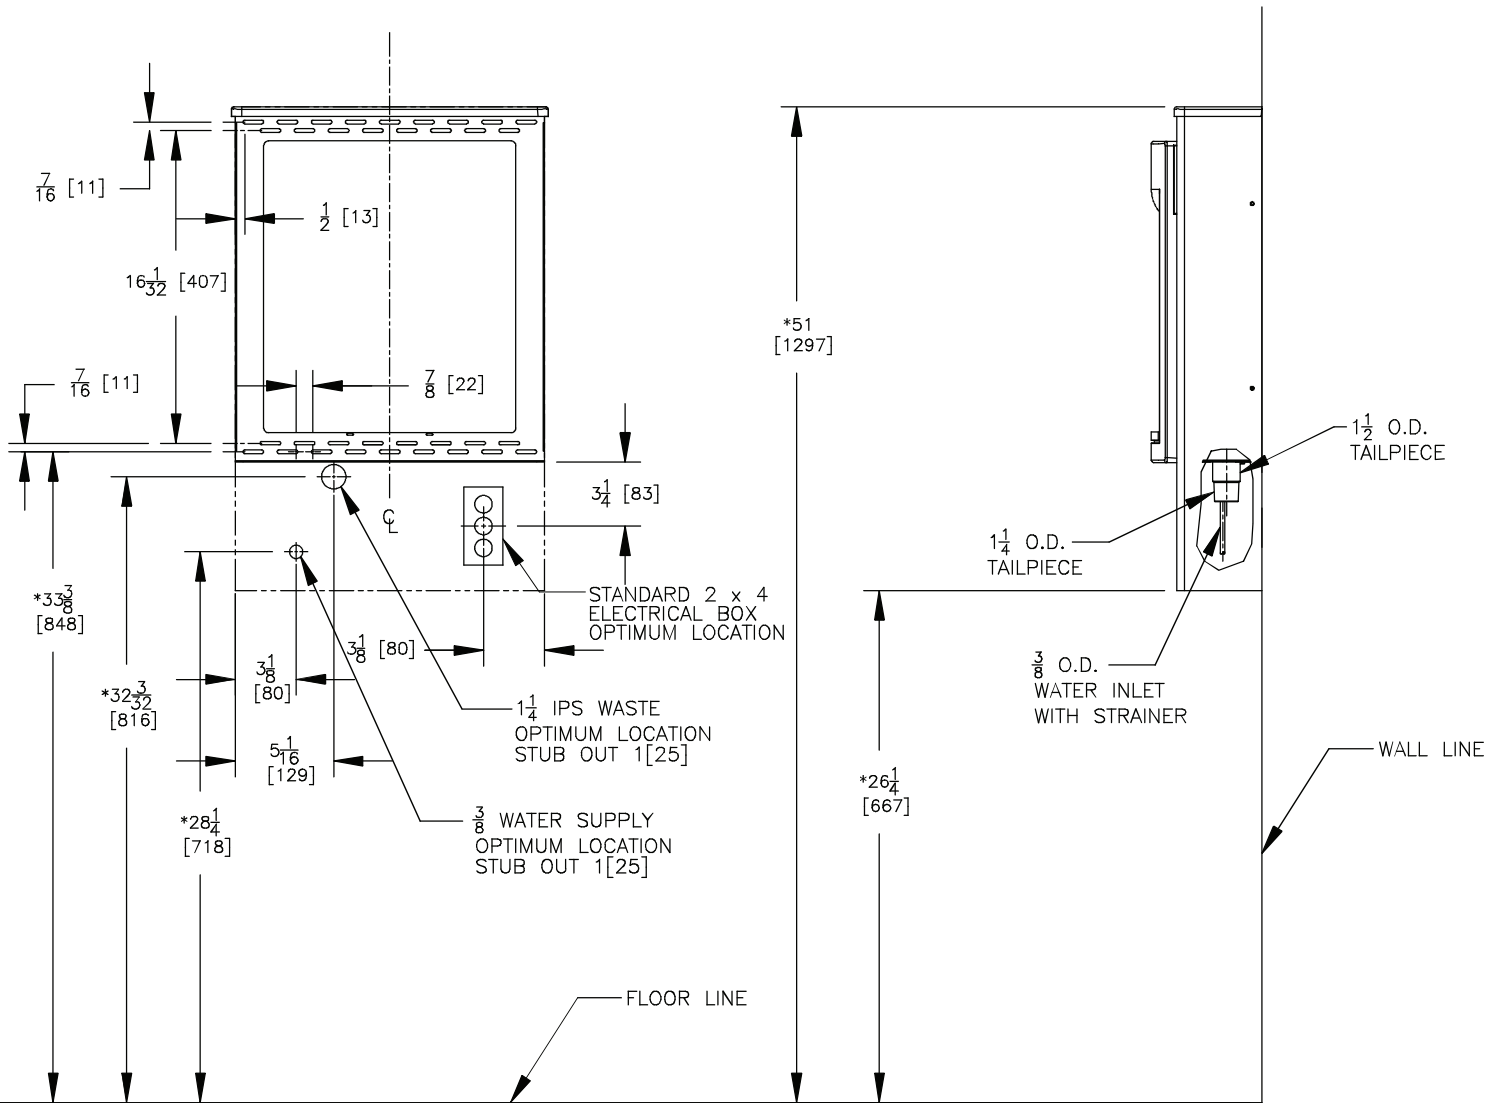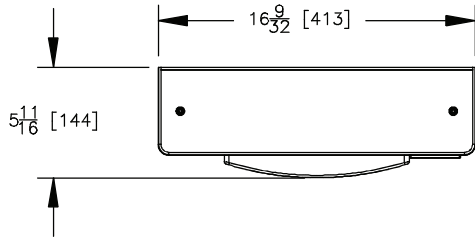

THIRD ANGLE PROJECTION



ROUGHING-IN AND DIMENSIONAL DRAWING