



14 GAUGE VANDAL RESISTANT UNIVERSAL BARRIER-FREE VERSACOOLER®II Energy and Water Conservation Technology **PGV8ACSL-14G**

Suggested Specification

PGV8ACSL-14G shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Cabinet & basin shall be 14 gauge stainless steel, with a heavy duty galvanized frame, with galvanized steel screens to prevent objects from being inserted into ventilation panels or underside of unit. Unit shall include a single vandal resistant push button to activate the flow of water. One-piece low flow vandal resistant chrome plated solid construction bubbler keyed into place to prevent vandalism. Cooling system shall use R-134a refrigerant, shall comply with ANSI A117.1 and ADA, listed by UL to U.S. and Canadian Standards, and ANSI/NSF 61 Annex G (AB1953)

Finishes

> Standard Cabinet Finish: Brushed Stainless Steel

Model

PGV8ACSL-14G Delivers 8.0 gallons of chilled drinking water in a universal installation design, high efficiency cooling, and vandal resistant 14 gauge panels.

Installation

- > Prior to roughing, consult with local, state and federal codes for proper mounting height
- > Shipped with complete instructions
- > Removable front panel provides access for installation

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways are lead free in materials & construction
- > 14 gauge Stainless Steel construction
- > One-piece vandal resistant bubbler keyed into position
- > Single vandal resistant mechanical activation
- > Stream height adjustment



Model
left high and right low or
right high and left low



Energy & Water
Conservation Model

Options (at additional costs)

- ☐ Oasis filtration system
- ☐ Bronze Finish
- ☐ Non-Refrigerated Unit PVAC-14G & PVACSL-14G

Limited 5 Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

ADA Compliant for both adult or child when properly installed.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Oasis International Electric Water Coolers are listed by Underwriters laboratories Inc. and comply with both U.S. and Canadian requirements

This product is certified to be Lead Free as defined by the Safe Drinking Water Act.

This unit is rated for outdoor use when properly installed.




Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G

Model	50° F Drinking Water 90° F Ambient Air Temp				115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler	Hot'N Cold™ Model	Compr. HP	Full Load Amps	Rated Watts			
PGV8ACSL14G	8.0	8.0	No	No	1/4	4.4	500	No	No	145 Lbs.

Industry Standard Rating Condition 80°F inlet water temperature.


Specifications subject to change without notice

OASIS® 14 GAUGE VANDAL RESISTANT BARRIER-FREE VERSACOOLER®II MODEL PGV8ACSL-14G

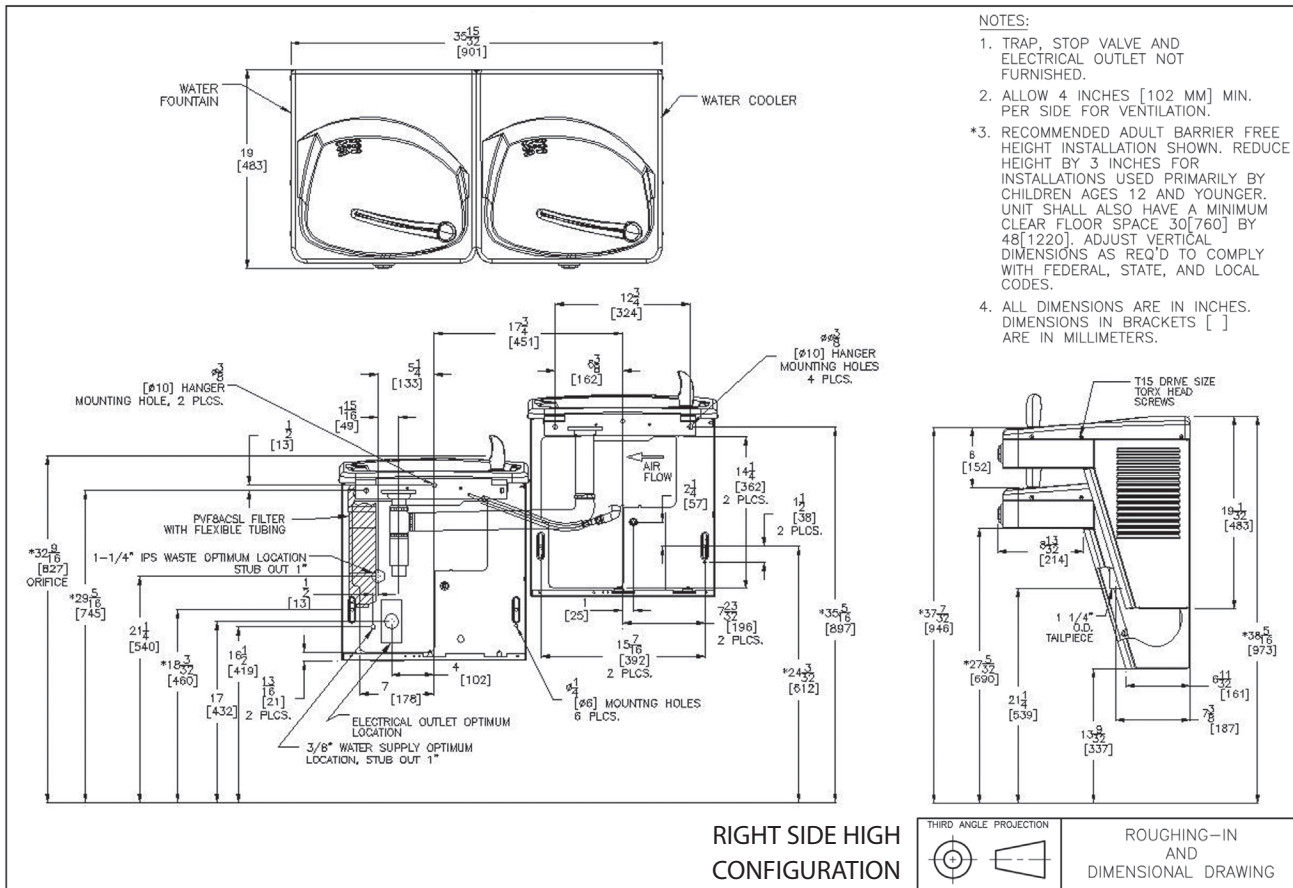

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
- *3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

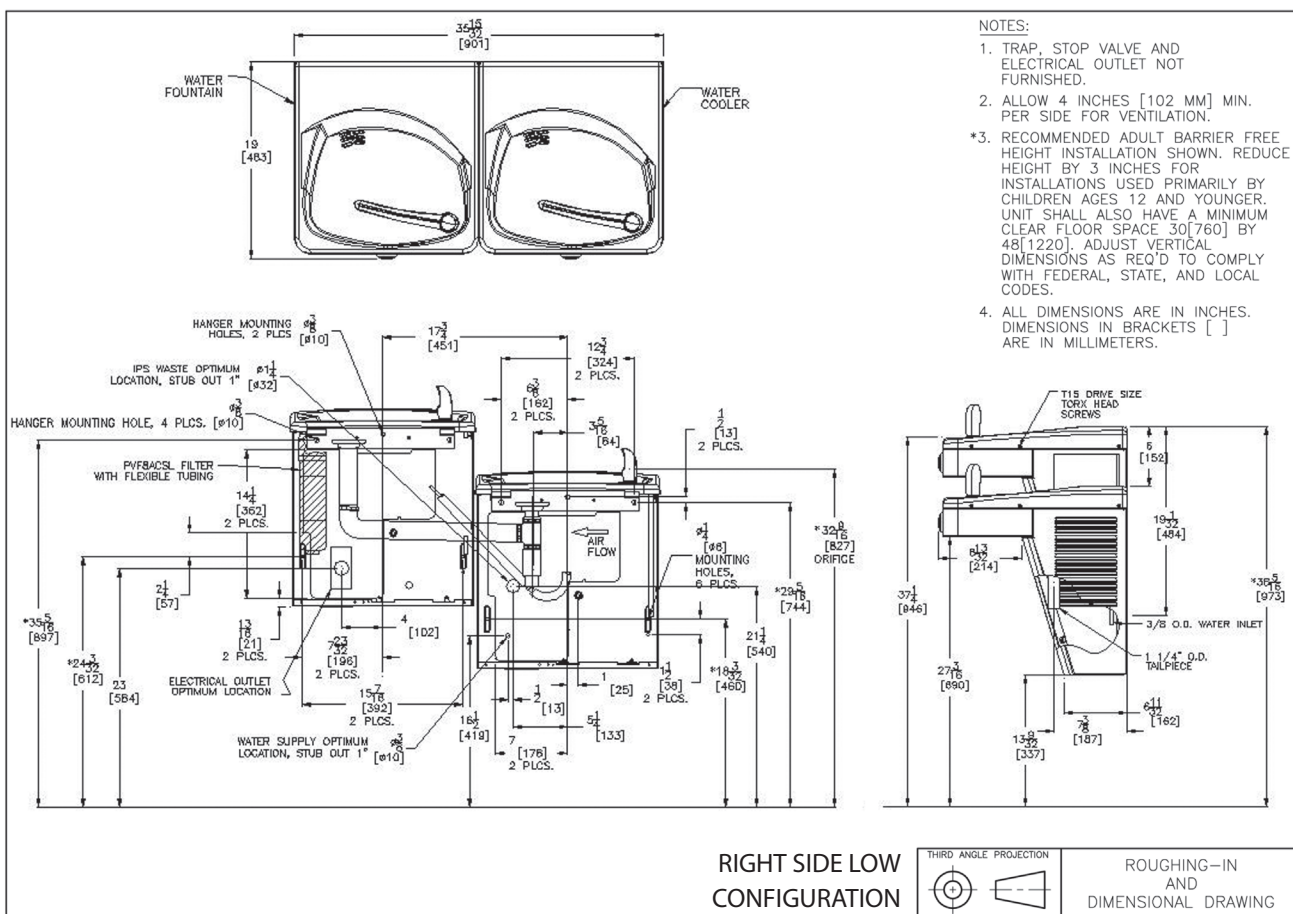

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
- *3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.