

### PRODUCT SPECIFICATIONS

Elkay WaterSentry Replacement Filter (Coolers + Fountains).  
Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".

<b>Special Features:</b>	Filtered
<b>Dimensions:</b>	3-1/8" x 3-1/8" x 9-1/2"
<b>Shipping Weight:</b>	2 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	1500 gal. (5678L)
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** Please note, some Elkay filters will ship with a clear cap, instead of a red cap. While colors of filter caps may vary based on inventory levels, there is no effect on filter performance.

- Replacement filter for models with WaterSentry filtration system (Coolers + Fountains).
- Filter should be replaced every 1,500 gallons or 1 year after installation.
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed.
- Designed to reduce lead, particles and chlorine. Also reduces odors and discoloration from incoming water.
- Spun polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media.
- Filter is tested and certified to NSF 42 and 53 for lead, Class 1 particulate, chlorine taste and odor reduction.





**Included with Product:** 1500 gal replacement filter cartridge

A Century of Tradition and Quality.  
For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

**Product Compliance:** NSF 372 (lead free)  
NSF 42  
NSF 53



[Installation Instructions \(PDF\) - 97747C](#)

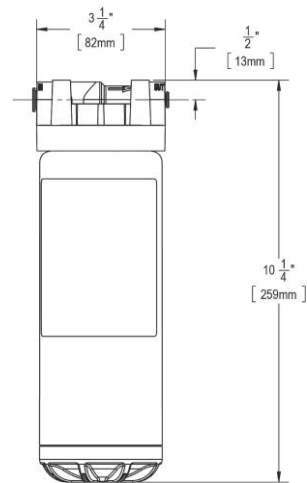

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*