

ELKAY® SPECIFICATIONS

Lustertone® Single Bowl Triple Ledge Sink and Sink Packages Models DRKR(Q)2822 Series and DRKAD(Q)2822 – A.D.A. Compliant Series Sinks

GENERAL

Lustertone sink with triple ledge. Highest quality sink bowl seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

DESIGN FEATURES


DRKR(Q) Bowl Depth: 7-5/8" (194mm).
DRKAD(Q) Bowl Depths: 4", 4-1/2", 5", 5-1/2", 6" or 6-1/2".
Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.
Bowl and Faucet Deck Recess: 3/16" (5mm) below outside edge of sink.
Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.
Underside: Fully undercoated to reduce condensation and dampen sound.
Sink complies with ASME A112.19.3/ CSA B45.4

 Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

 Both the faucet and the bubbler are classified by Underwriters Laboratories Inc. to NSF/ANSI61 for residential use.

OTHER

DRKR(Q)2822 Series drain opening is 3-1/2" (89mm) and centered in bowl as illustrated.
DRKAD(Q)2822 Series drain opening is 3-1/2" (89mm) and located centered left-to-right and off-centered front-to-back as illustrated.
Suffix "L" (left) and "R" (right) denotes location of slotted hole side ledge. Slotted hole allows for vandal-resistant faucet and bubbler.
NOTE: Unless otherwise specified, sink is furnished with 3 faucet holes as shown.

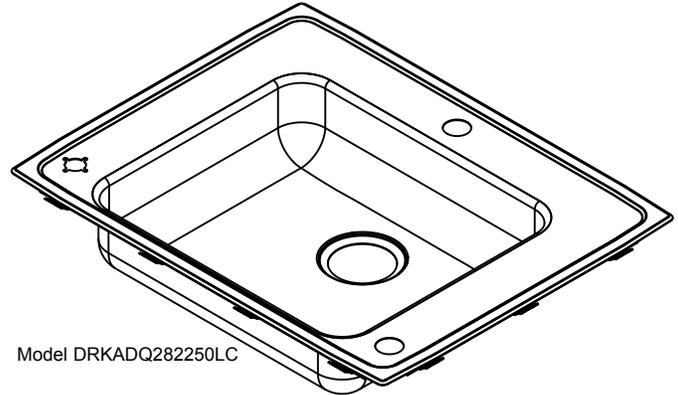

Model DRKADQ282250LC


CLASSROOM/INSTITUTIONAL SINK PACKAGE

Models DRKR2822LC/RC

- (1)LKF413945RS - Faucet
- (1)LK1141A No Lead Flexi-Guard® Bubbler.
- (1)LK35 Duo Strainer.

DRKAD2822LC/RC Package includes:

- (1)LKF413945RS - Faucet
- (1)LKVR1141A Same as LK1141A except vandal-resistant, with metal bubbler guard and anti-rotation feature.
- (1)LKAD35 Duo strainer with offset tailpiece.

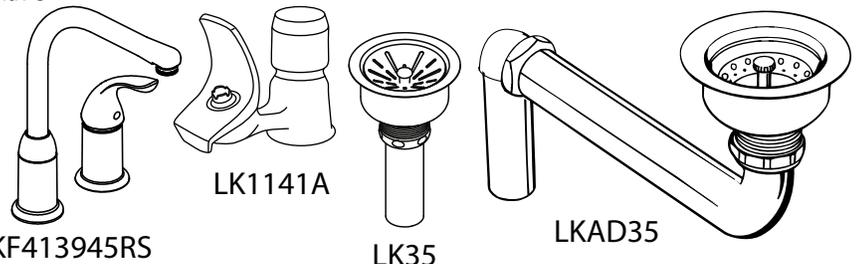

SINK DIMENSIONS (INCHES)*

U-Channel Model Number	Quick-Clip Model Number	Overall		Inside Bowl			Cutout in Countertop (1 1/2" Radius Corners)		3-1/2" Drain Opening (see above for details)	Minimum Cabinet Size	Ship. Wt. Lbs.
		L	W	L	W	D	L	W			
DRKR2822LC/RC	-	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	7 5/8 (194mm)	27 3/8 (695mm)	21 3/8 (543mm)	Centered	33 (838mm)	23
†DRKR2822L	†DRKRQ2822L	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	7 5/8 (194mm)	27 3/8 (695mm)	21 3/8 (543mm)	Centered	33 (838mm)	16
†DRKR2822R	†DRKRQ2822R	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	7 5/8 (194mm)	27 3/8 (695mm)	21 3/8 (543mm)	Centered	33 (838mm)	25
DRKAD2822LC/RC	-	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	‡	27 3/8 (695mm)	21 3/8 (543mm)	Off-Centered	33 (838mm)	25
†DRKAD2822L	†DRKADQ2822L	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	‡	27 3/8 (695mm)	21 3/8 (543mm)	Off-Centered	33 (838mm)	16
†DRKAD2822R	†DRKADQ2822R	28 (711mm)	22 (559mm)	19 (483mm)	16 (406mm)	‡	27 3/8 (695mm)	21 3/8 (543mm)	Off-Centered	33 (838mm)	16

* Length is left to right. Width is front to back.

** Available in 4", 4-1/2", 5", 5-1/2", 6", 6-1/2" depths. Please consult your sales representative for other depths or modifications.

† Unless otherwise specified, all sinks which do not have suffix "C" are less fittings (no faucet, bubbler or drain), but are drilled for faucet, bubbler and drain as illustrated.




In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.


This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.

**Lustertone® Single Bowl Triple Ledge Sink
and Sink Packages**
Models DRKR(Q)2822 Series and
DRKAD(Q)2822 – A.D.A. Compliant Series Sinks

ELKAY®
SPECIFICATIONS

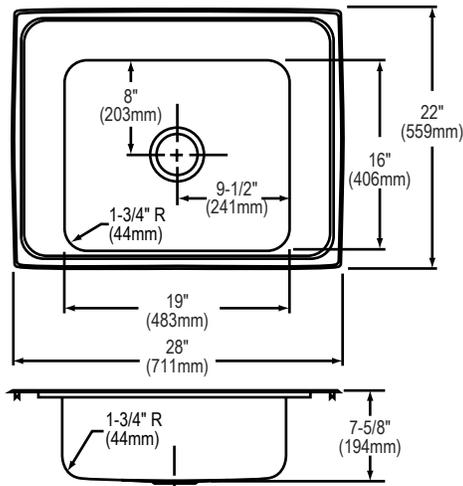


Model DRKR(Q)2822LC/RC

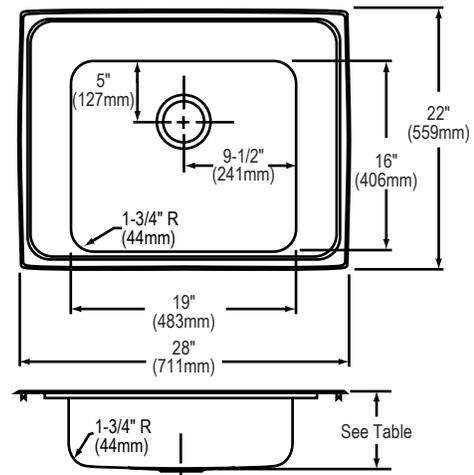


Model DRKAD(Q)282265LC/RC


HOLE DRILLING CONFIGURATIONS

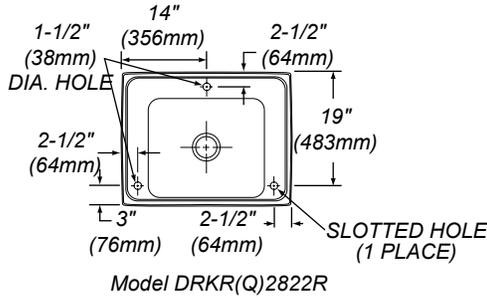


Model DRKR(Q)2822R

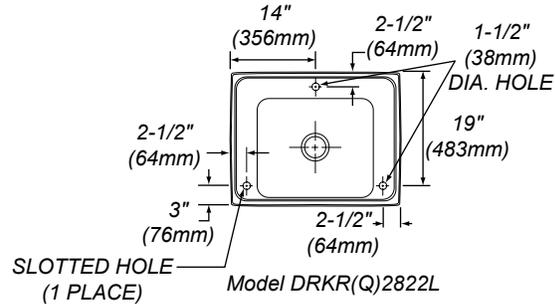

Model DRKR(Q)2822L


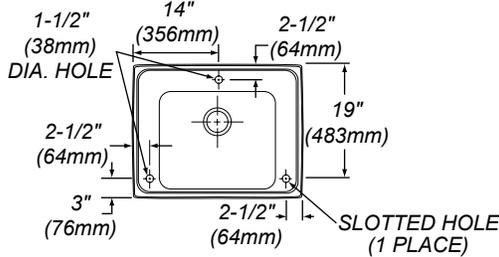


Models DRKAD(Q)282255R
 DRKAD(Q)282260R
 DRKAD(Q)282265R

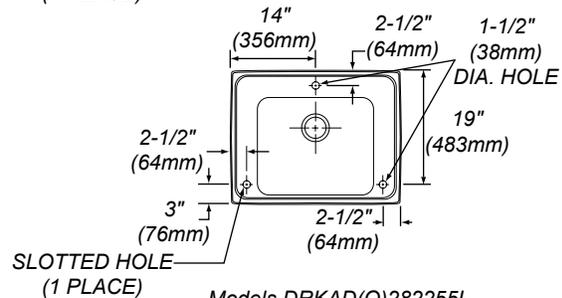


Models DRKAD(Q)282255L
 DRKAD(Q)282260L
 DRKAD(Q)282265L

U-Channel Type Mounting System

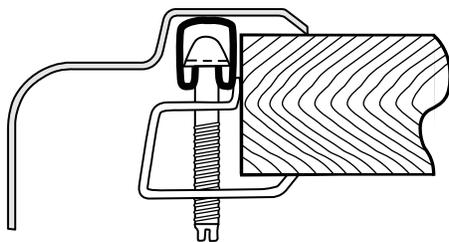

Slotted Hole

Quick-Clip® Mounting System

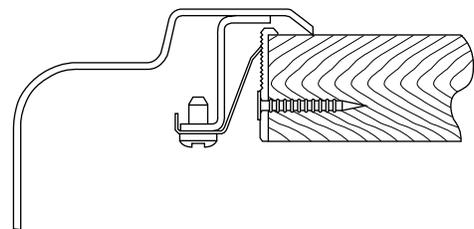

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.