

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### Gourmet Single Bowl Sink with Perfect Drain™ and Slim Rim Models LSR2722PD and DLSR272210PD

#### GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Universal mount.

#### DESIGN FEATURES

**Slim Rim:** Ultra thin edge that virtually eliminates the barrier between the sink and countertop, allowing for a universal (top or undermount) installation option.

**Bowl Depths:** See chart on next page.

**Coved Corners:** 1-3/4" (44mm) horizontal and vertical radii.

**Finish:** Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

**Underside:** Fully protected by Sound Guard<sup>®</sup> undercoating to reduce condensation and dampen sound.

**Perfect Drain:** Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with one LKPD1 drain kit, or a garbage disposer can be installed on the sink bowl for user convenience.

#### Patent Pending

#### OTHER

Drain opening: 3-3/8" (86mm)

Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2

Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

#### OPTIONAL ACCESSORIES


Bottom Grid: LKWBG2416SS

Cutting Boards: CB1713, CBS1316



Mounting Hardware: LK364

Rinsing Basket: LKWRB2416SS, LKWERBSS

Utensil Caddy for Rinsing Basket: LKWUCSS

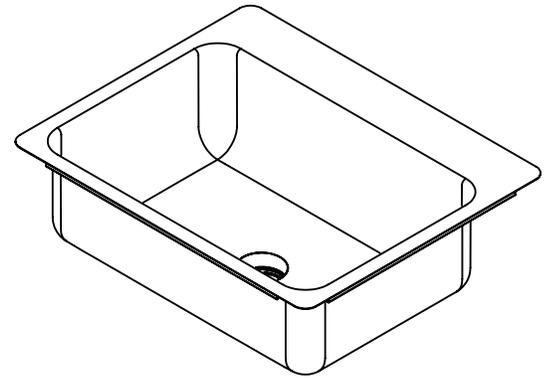

Model LSR2722PD

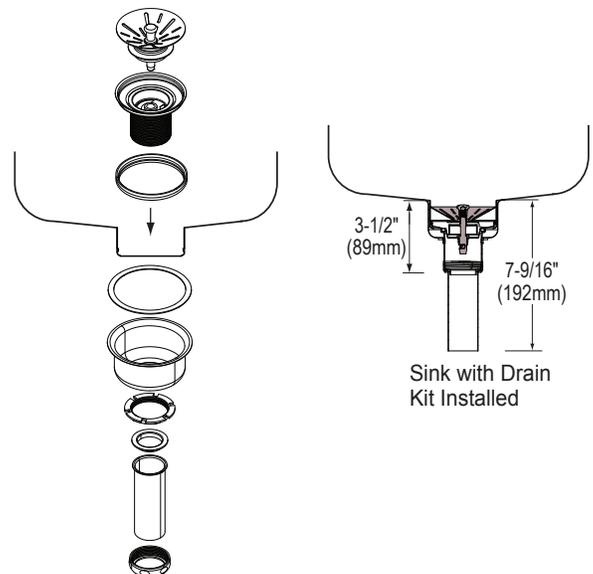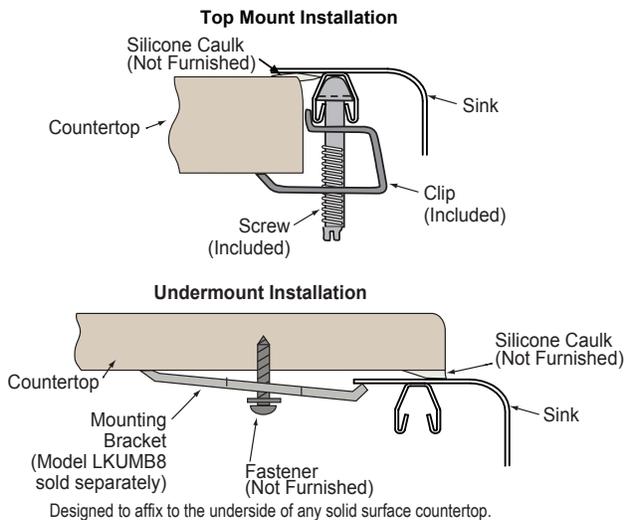

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkayusa.com](http://elkayusa.com) for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

# ELKAY<sup>®</sup>


## SPECIFICATIONS

### Gourmet Single Bowl Sink with Perfect Drain™ and Slim Rim Models LSR2722PD and DLSR272210PD


#### SINK DIMENSIONS\*

Model Number	Overall			Inside Bowl			Cutout in Countertop (1 1/2" [38mm] Radius Corners)		No. of 1 1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
	L	W	D	L	W	D	L	W		
LSR2722PD	27 (686mm)	22 (559mm)	9-1/2 (241mm)	24 (610mm)	16 (406mm)	8 (203mm)	26-3/8 (670mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4, or 5	30 (762mm)
DLSR272210PD	27 (686mm)	22 (559mm)	11-1/2 (292mm)	24 (610mm)	16 (406mm)	10 (254mm)	26-3/8 (670mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4, or 5	30 (762mm)

\*Length is left to right. Width is front to back.

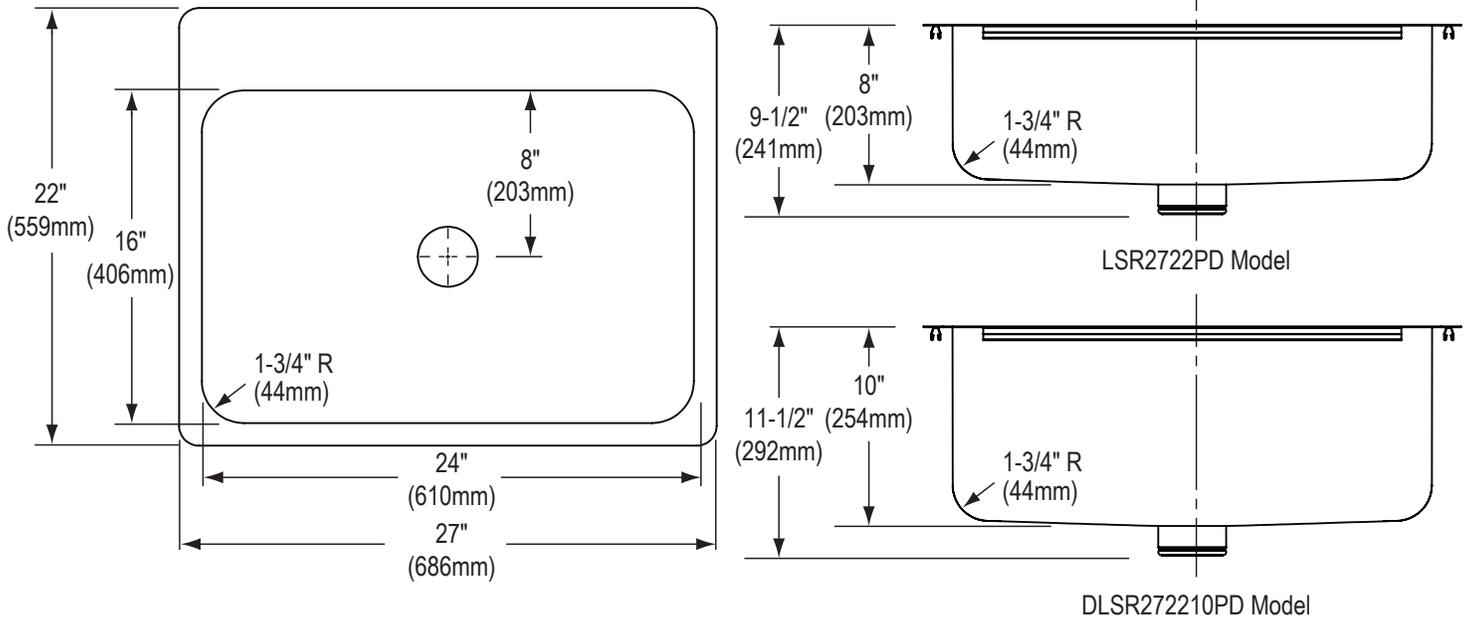

#### Hole Drilling Configurations 1-1/2" (38mm) Diameter Faucet Holes

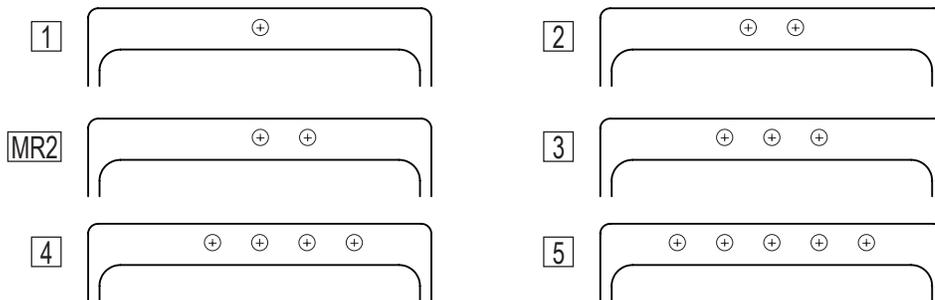

**in sink erator<sup>®</sup>**

Elkay<sup>®</sup> Perfect Drain™ sinks are designed and approved for compatible disposers manufactured by InSinkEerator<sup>®</sup> utilizing the Quick Lock<sup>®</sup> mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkEerator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkayusa.com](http://elkayusa.com) for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.