



Halsey Taylor[®]
Satisfying Thirsts Since 1912

Endura II™ Outdoor Tubular Fountain

Sanitary Freeze-Resistant Pedestal Fountain

MODEL 4400SFRK

GENERAL

Endura II™ Steel Outdoor Sanitary Freeze-Resistant Pedestal Fountain with rounded corner design, heavy-duty steel with textured powder-coat finish and E-Coat immersion for year-round beauty with minimum maintenance. The E-Coat immersion process coats the inside and outside for the ultimate in corrosion protection.

BUBBLER

Vandal-resistant bubbler is one-piece, heavy-duty construction. Unit has integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

SANITARY FREEZE-RESISTANT VALVE SYSTEM

Designed for ground installation 18" minimum below the frost line. Fully sealed assembly minimizes chance of ground water contamination, and prevents drain water from mixing with fresh water.

BASIN

Contour-formed stainless steel design with rounded edges reduces splatter, ensures proper drainage and prevents standing water.

PUSHBUTTON ACTUATION MECHANISM

Self-closing, vandal-resistant pushbutton does not require grasping or twisting.

WATER INLET & DRAIN OUTLET

Inlet: 1/2" male NPT fitting.



Outlet: Drain requirements are detailed in the owner's manual.

ACCESS PANELS

Heavy-gauge steel with vandal-resistant screws. Provides access for easy hook-up of all plumbing connections.

SUGGESTED SPECIFICATIONS

Unit shall include powder-coated finish with vandal-resistant pushbutton actuation, vandal-resistant bubbler with integral hood guard, and contour-formed rounded basin to reduce splash and prevent standing water. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act.

Model	Color Option		
		ADA Compliant	NSF/ANSI 61 Certified
4400SFRK*	(Refer to Finish Color Options)	•	•

* Select color option to complete model number. Example: 4400SFRKEVG

Each 4400 SFR consists of 2 cartons of the following:

- Fountain
- Single Freeze-Resistant Valve System - SANITARYFR1

Note: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.



Model 4400SFRK is shown.

Now Available in 12 Colors!



FINISH COLOR OPTIONS – Choose color option to complete your model number, add as suffix example: 4400SFRKEVG

Matte finish: Evergreen = EVG

Gloss finish:

- | | | |
|--------------------------------------|---------------------------------------|---|
| <input type="checkbox"/> Beige = BGE | <input type="checkbox"/> Gray = GRY | <input type="checkbox"/> Terracotta = TER |
| <input type="checkbox"/> Black = BLK | <input type="checkbox"/> Orange = ORN | <input type="checkbox"/> White = WHT |
| <input type="checkbox"/> Blue = BLU | <input type="checkbox"/> Purple = PUR | <input type="checkbox"/> Yellow = YLW |
| <input type="checkbox"/> Brown = BRN | <input type="checkbox"/> Red = RED | |

OPTIONS

- Hose Bib (Locking) - 4471LHB* (Choose color option to complete your model number)
- Hose Bib (Non-Locking) - 4470NLHB* (Choose color option to complete your model number)
- Direct Bury Kit - 97890C

Endura II™ Outdoor Tubular Sanitary Freeze-Resistant Fountain MODEL 4400SFRK

OPERATING PRESSURES:
Supply water 20 – 105 psi maximum

MOUNTING INSTRUCTIONS and PLUMBING INSTRUCTIONS

Site and drainage excavation is required for fountain installation. Refer to owner's manual for site preparation details. Provide solid, well-drained surface to mount pedestal fountain (concrete pad recommended) with adequate support (300 lb. load minimum). (6) 3/8" minimum fasteners (not included) should be attached securely to mounting surface in order to secure fountain, (Refer to rough-in diagram), and be sure to allow an opening for the freeze-resistant valve in the ground as shown in the installation instructions that accompany the fountain. (Refer to the rough-in diagram below). Refer to local codes for any additional requirements.

Locate and install plumbing through ground as required. Assemble fountain to prepared site and mounting pad.

NOTE: Fountain is not furnished with service valve.


Position pedestal over plumbing and secure base to fasteners. Remove access panels and connect supply and water lines. Turn on water supply and check for leaks. Refer to owner's manual for detailed instructions.

Reassemble access panels to pedestal. Trap and service stop not included.

TOP VIEW

(6) 1/2" (13mm) DIA. HOLES
EQUALLY SPACED ON A
12" (305mm) BOLT CENTER

Ø 14"
356mm

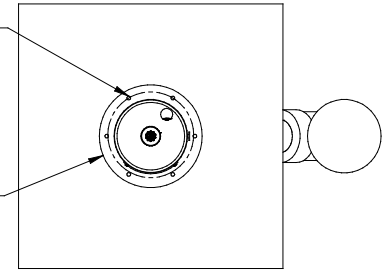


DETAIL A AIR GAP / VACUUM BREAKER


1-1/4" DRAIN TUBE
SUPPLIED WITH FTN.

AIR GAP ASSY.
SUPPLIED WITH
VALVE


1-1/2" DRAIN TUBE
SUPPLIED BY
INSTALLER



SANITARY FREEZE-RESISTANT VALVE GROUND INSTALL DETAIL

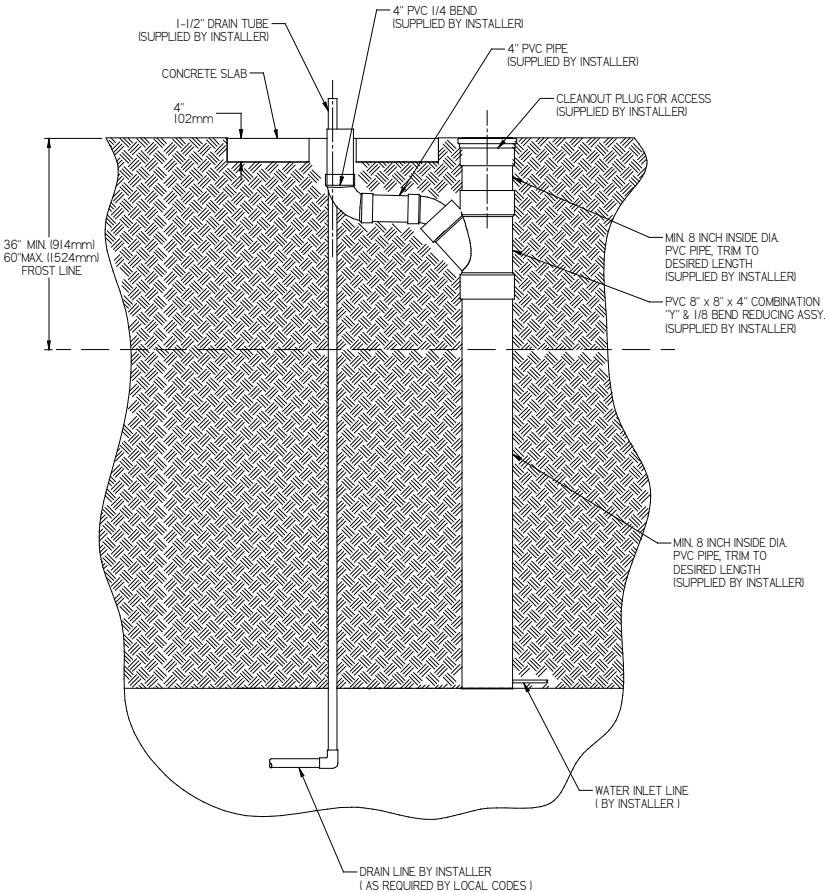

SIDE VIEW

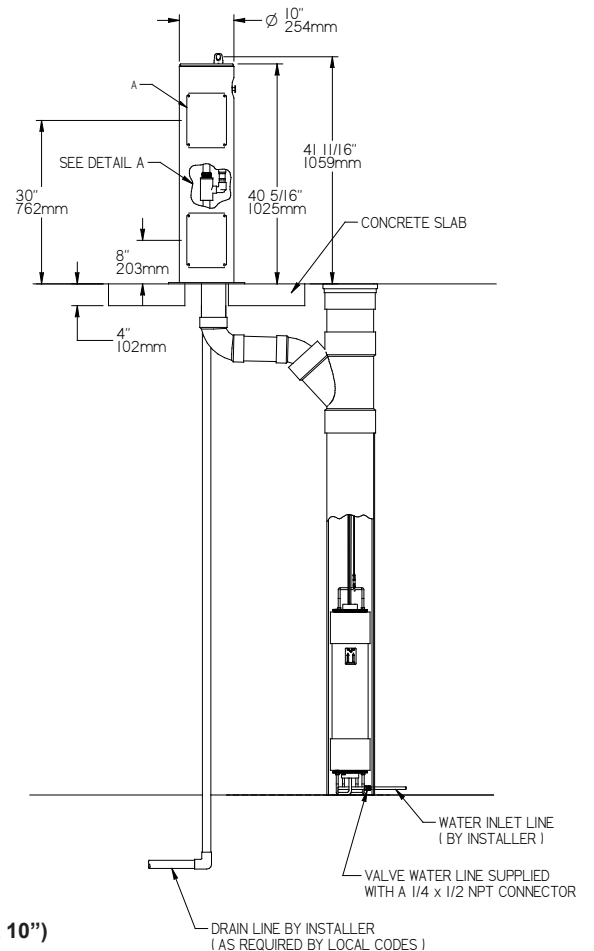

LEGEND

A = ACCESS PANEL (8" X 10")

Halsey Taylor®