



MODEL SCWT14A-VR-Q

Free-Standing Cooler



This water cooler is certified to **NSF/ANSI 61**.

GENERAL

Self-contained, electric refrigerated, free-standing water cooler designed to be easily accessible to able-bodied individuals. Unit is certified to NSF/ANSI 61 and meets requirements of the Safe Drinking Water Act. Unit provides 50° F water at 80° F inlet water and 90° F ambient.

CABINET

Heavy-gauge vinyl clad steel. Resistant to wear, moisture, perspiration, heat, and sunlight. Optional Stainless Steel is available.

COOLER TOP

Non-corrosive stainless steel cooler top, number 300 series with satin finish resists stains and corrosion and is easy to maintain. Anti-splash ridge reduces splatter. Contoured to insure proper drainage.

BUBBLER

Vandal-resistant projector is one-piece, chrome-plated. Unit has integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

PUSHBUTTON ACTUATION MECHANISM

Self-closing, vandal-resistant pushbutton does not require grasping or twisting.

AUTOMATIC STREAM HEIGHT REGULATOR

Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and liming. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

INLET STRAINER

Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

TEMPERATURE CONTROL

Positive sensing thermostat for controlling temperature of storage tank water. Factory set at 50° F Adjustable $\pm 5^\circ$ F.

STORAGE TANK

Non-pressurized stainless steel evaporator/storage tank for long life. Waterways are certified to NSF/ANSI 61, far exceeding the requirements of the Safe Drinking Water Act.

REFRIGERATION SYSTEM

Hermetically sealed, positive start compressor with lifetime lubrication and built-in overload protection, efficient capillary sizing, large capacity dryer-strainer, and self-lubricated fan cools copper/aluminum condenser. System uses R134A refrigerant. Protected by Halsey Taylor's Limited 5 Year Warranty.

VENTILATION

Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.

SUGGESTED SPECIFICATIONS

Shall deliver 13.5 GPH of 50° F water at 90° F ambient and 80° F inlet water. Shall have stainless steel basin with removable drain strainer. Bubbler shall be vandal-resistant type. Separate valve and automatic stream regulator shall be mounted within cabinet. Refrigeration system shall employ high efficiency, positive start compressor using R134A, non-pressurized tank with totally encapsulated insulation and be controlled by positive sensing thermostat. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act. Unit complies with ARI Standard 1010.

NOTE: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.



Standard finish is Stainless Steel

Optional Accessories (extra cost)

Water Filter

Trap and service stop not included.

JOB NAME: _____

 ENGINEER/CONTRACTOR NAME:

 APPROVAL: _____
 DATE: _____

SCWT SERIES

Model No.	GPH Capacity Cooled to 50° F*				Base Rate Cap.	F.L. Amps	Shipping Weight lb.	Rated Watt Usage
	Ambient Air Temp							
	70°F	80°F	90°F†	100°F				
SCWT14A-VR-Q	18.0	15.8	13.5	12.6	13.5	7.5	75	690

* With projector service and tap water at 80°F.

† UL listed and complies with ARI Standard 1010



SCWT14A-VR-Q

Vandal-Resistant Free-Standing Cooler

(CONTINUED)

ROUGH-IN, MOUNTING, AND ELECTRICAL INSTRUCTIONS

This cooler may be installed against the wall or freestanding from the wall.

NOTE: With slight modifications, rough-in heights from 16.5" and 24.3" can be accommodated. 2" maximum may be cut from the tailpiece provided.

For against-the-wall installation

Provide 2" x 4" wood blocking back of finished wall for securing cooler flush with finished wall. (Refer to rough-in drawing.) Install 1 1/4" trap 5 1/4" from wall face to center of trap inlet. Trap not furnished. Install 3/8" IPS service stop to building supply line.

Trap and service stop not included.

OPERATING PRESSURES:


Supply water-105 psi maximum

ELECTRICAL

Electrical receptacle to be installed to receive 3-wire parallel blade grounding type male plug. Note cord length is 4 feet from cord exit point in cooler. Cooler can now be mounted against the wall and secured to blocking with two wood screws. Be sure 1 1/4" O.D. slip connection tube from cooler waste to trap is in line. Connect water supply line to 3/8" tubing inlet connection located inside of cabinet below shelf.

For freestanding installation

A hole is provided in back of cabinet for plumbing entrance. See rough-in drawing and outline drawing. Install 1 1/4" IPS trap inside cabinet. Trap not furnished. Install 3/8" IPS service stop to building supply line outside of cooler cabinet. Service stop not furnished. Connect water supply from building to 3/8" tubing inlet connection located inside of cabinet below shelf.

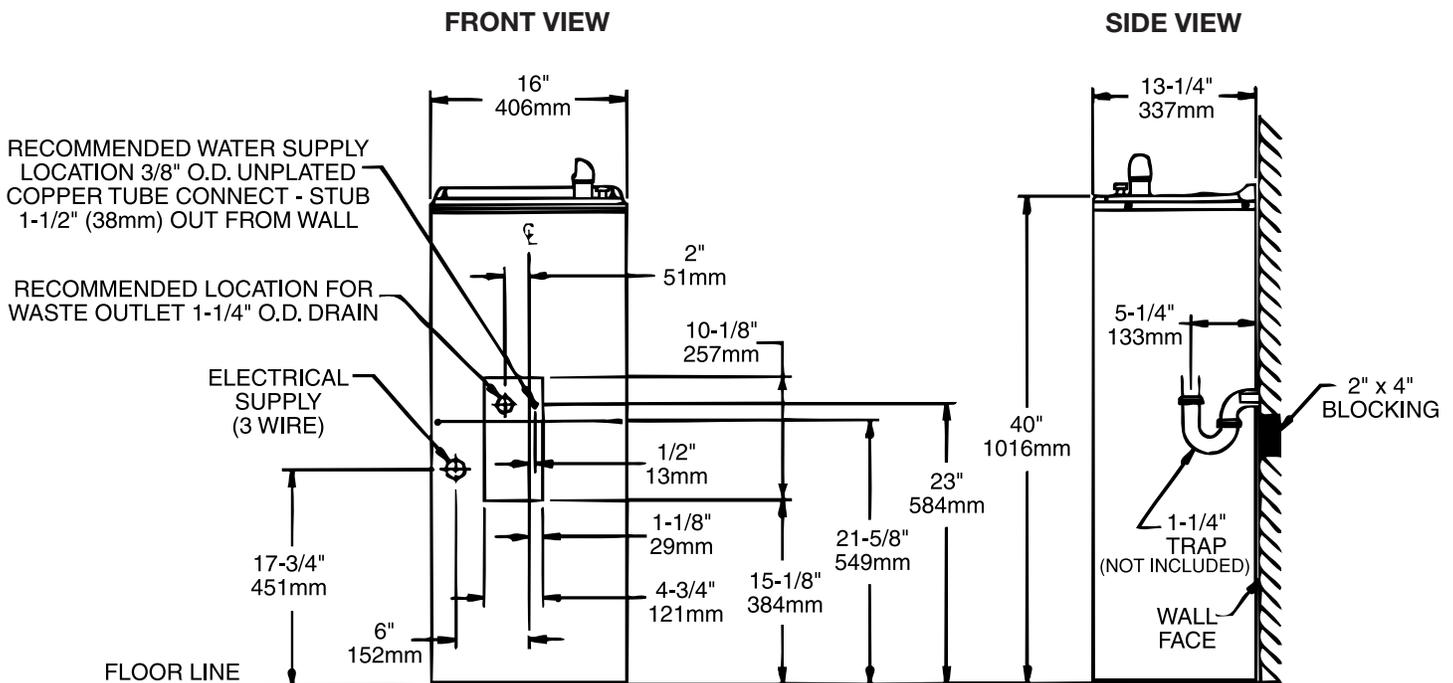

Halsey Taylor®