



# model 6518FR

Faucets and Valves

## FEATURES & BENEFITS

### SERVICEABILITY

Operation and maintenance ease is achieved through both the adjustable stream regulation and the ability of the valve assembly to be lifted to the surface and lowered back into the casing, so in the rare event that maintenance is required, can be done without having to disturb the fountain.

### YEAR-ROUND SERVICE

Reliable and fully engineered system allows the pneumatic valve to be installed below the frost line, and equipped with the ability to drain the water line after use to non-freezing depths so the unit can be used year round.

## OPTIONS

To see all options for this model, visit [www.hawesco.com](http://www.hawesco.com)




## SPECIFICATIONS

Model 6518FR freeze-resistant bury valve for use with single bubbler head pedestal fountains shall include a brass pneumatic operated valve installed below the frost line, check valve to drain water from unit when not in use and to prevent back-flow cross contamination, regulator valve, separate valve access and pull-out design for easy maintenance, 6" (15.2 cm) diameter PVC pipe to encase valve assembly, and 1/2" IPS supply.

## APPLICATIONS


Freeze-resistant valve system is used in all Haws single bubbler, freeze-resistant, pedestal mounted fountains. Because this valve is installed below the frost line, it allows the fountain it is installed with to function year round in freezing conditions. Responsible for this non-freezing feat is a pneumatic operated valve that drains the water from the fountain to non-freezing depths. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006).



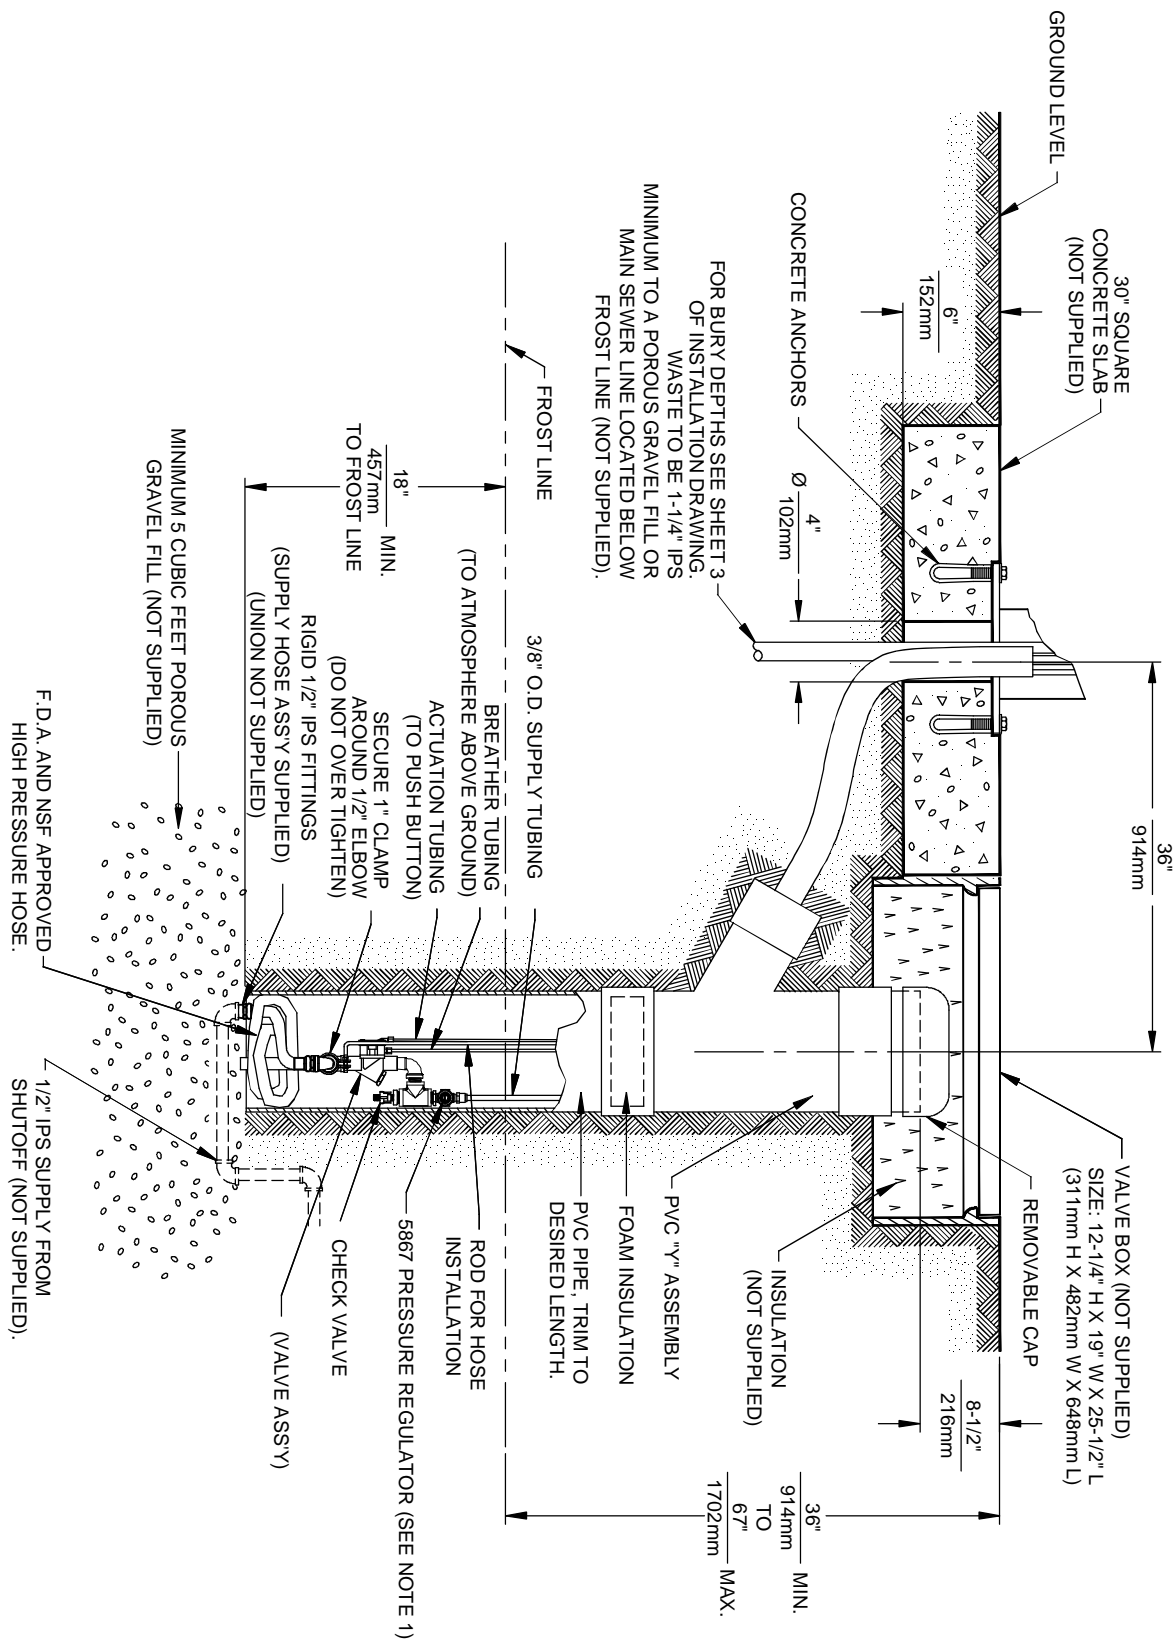



**NOTE:**

1. IF JUG FILLER IS TO BE ADDED, YOU MUST USE A MODEL 6518.2FR, IN THIS APPLICATION ANY FLOW CONTROL CONNECTED TO JUG FILLER MUST BE REMOVED.





1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY:	MODEL(S)	PART NUMBER:
ECN: 4789 HM	6518FR	0002077777.D
DRAWN: DATE: CHK'D:	VALVE, FREEZE RESISTANT, SINGLE	DRAWING NO.: REV:
TRF: Y280		08805A00 118
APPROVED: DATE:	SCALE: 1:13	DRAWING TYPE: INSTALLATION
		SIZE: A SHEET: 1 OF 3

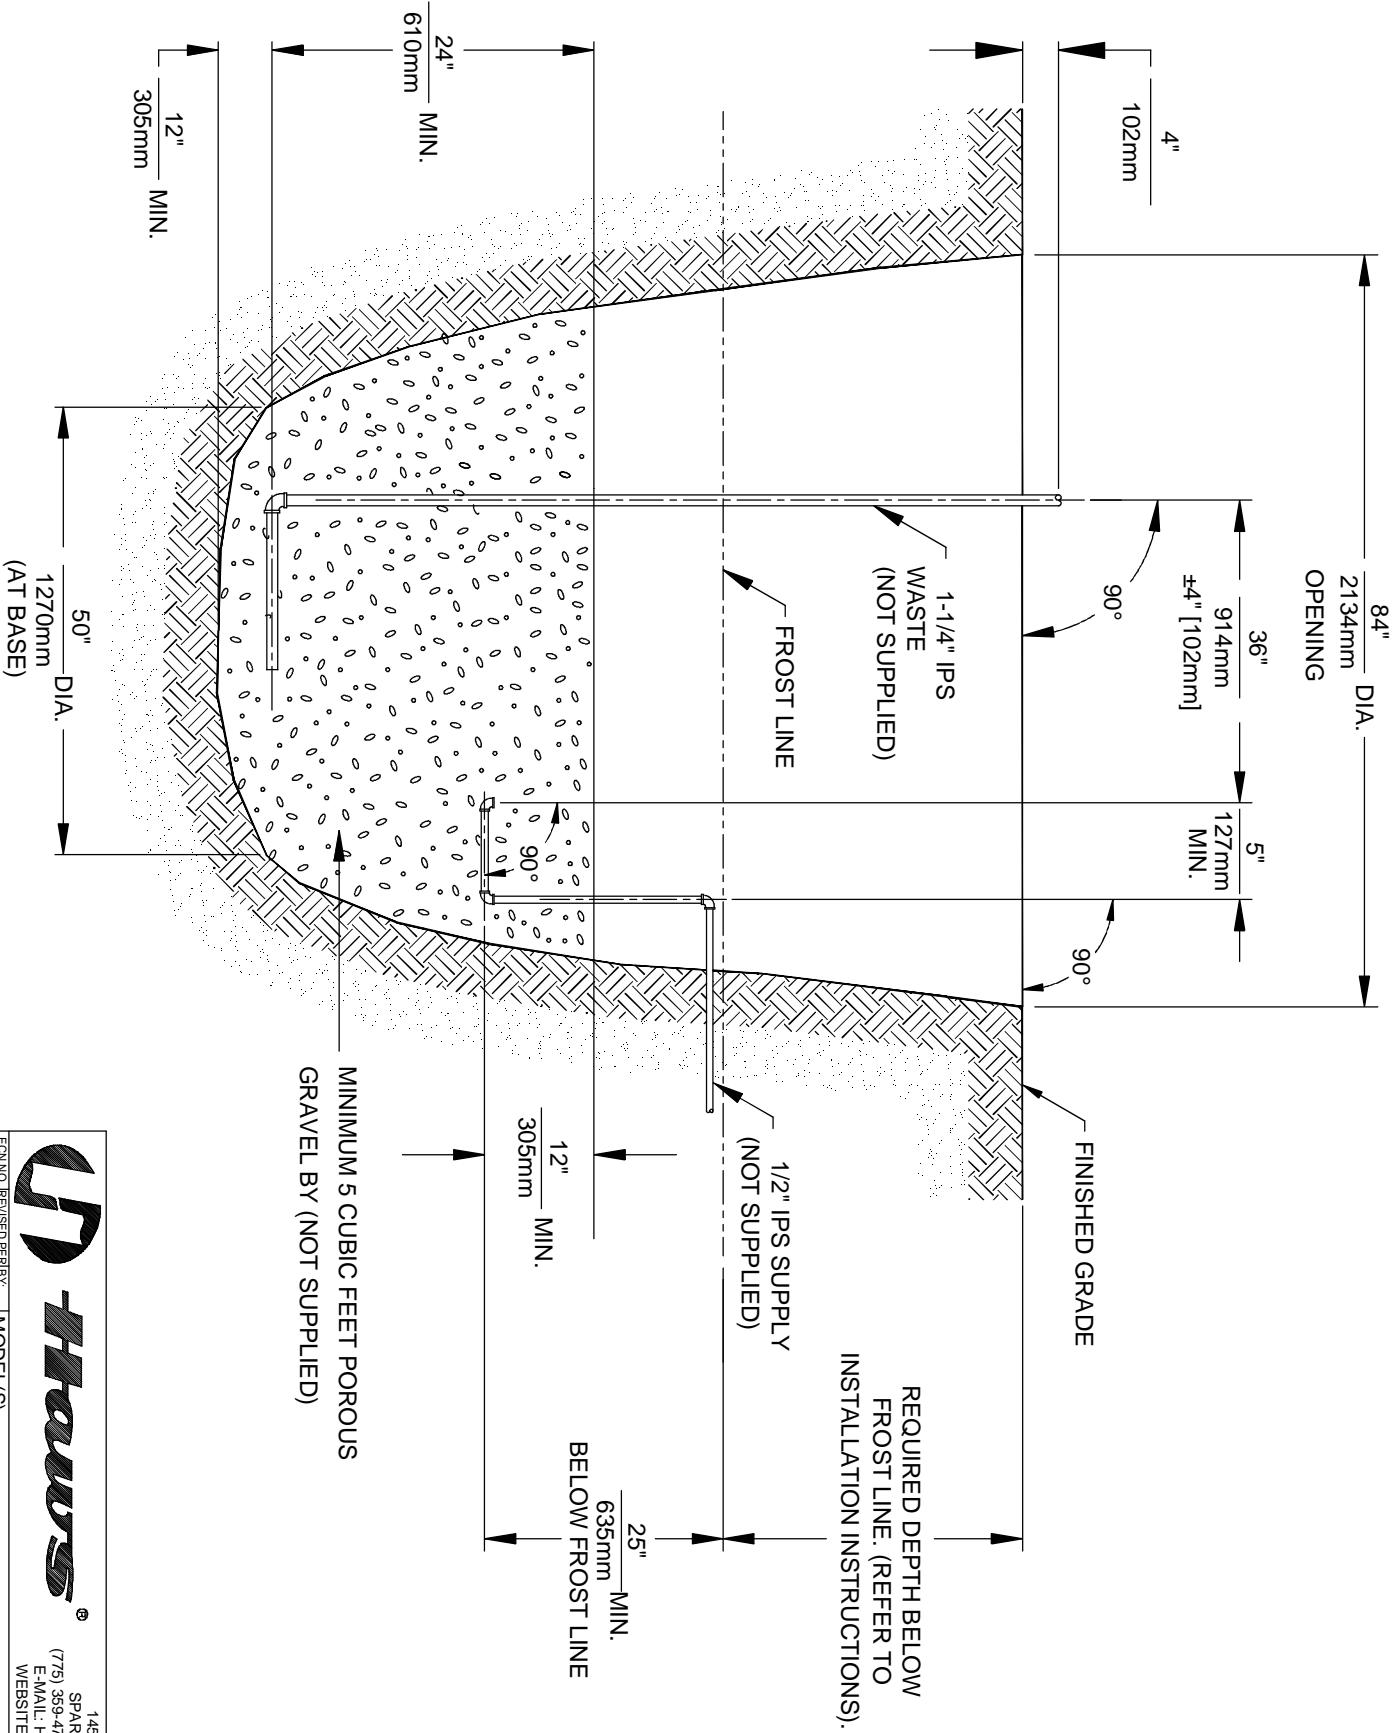

1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY:		MODEL(S)	
DRAWN:	ECN: 4789 HM	6518FR	
TRF:	DATE: 1/2/90	VALVE, FREEZE RESISTANT, SINGLE	
APPROVED:	DATE:	DRAWING TYPE: INSTALLATION	
SCALE: 1/2"		SIZE: A	
PART NUMBER:		SHEET: 2 OF 3	
DRAWING NO.: 0002077777.D		REV:	
REV:		08805A00 118	

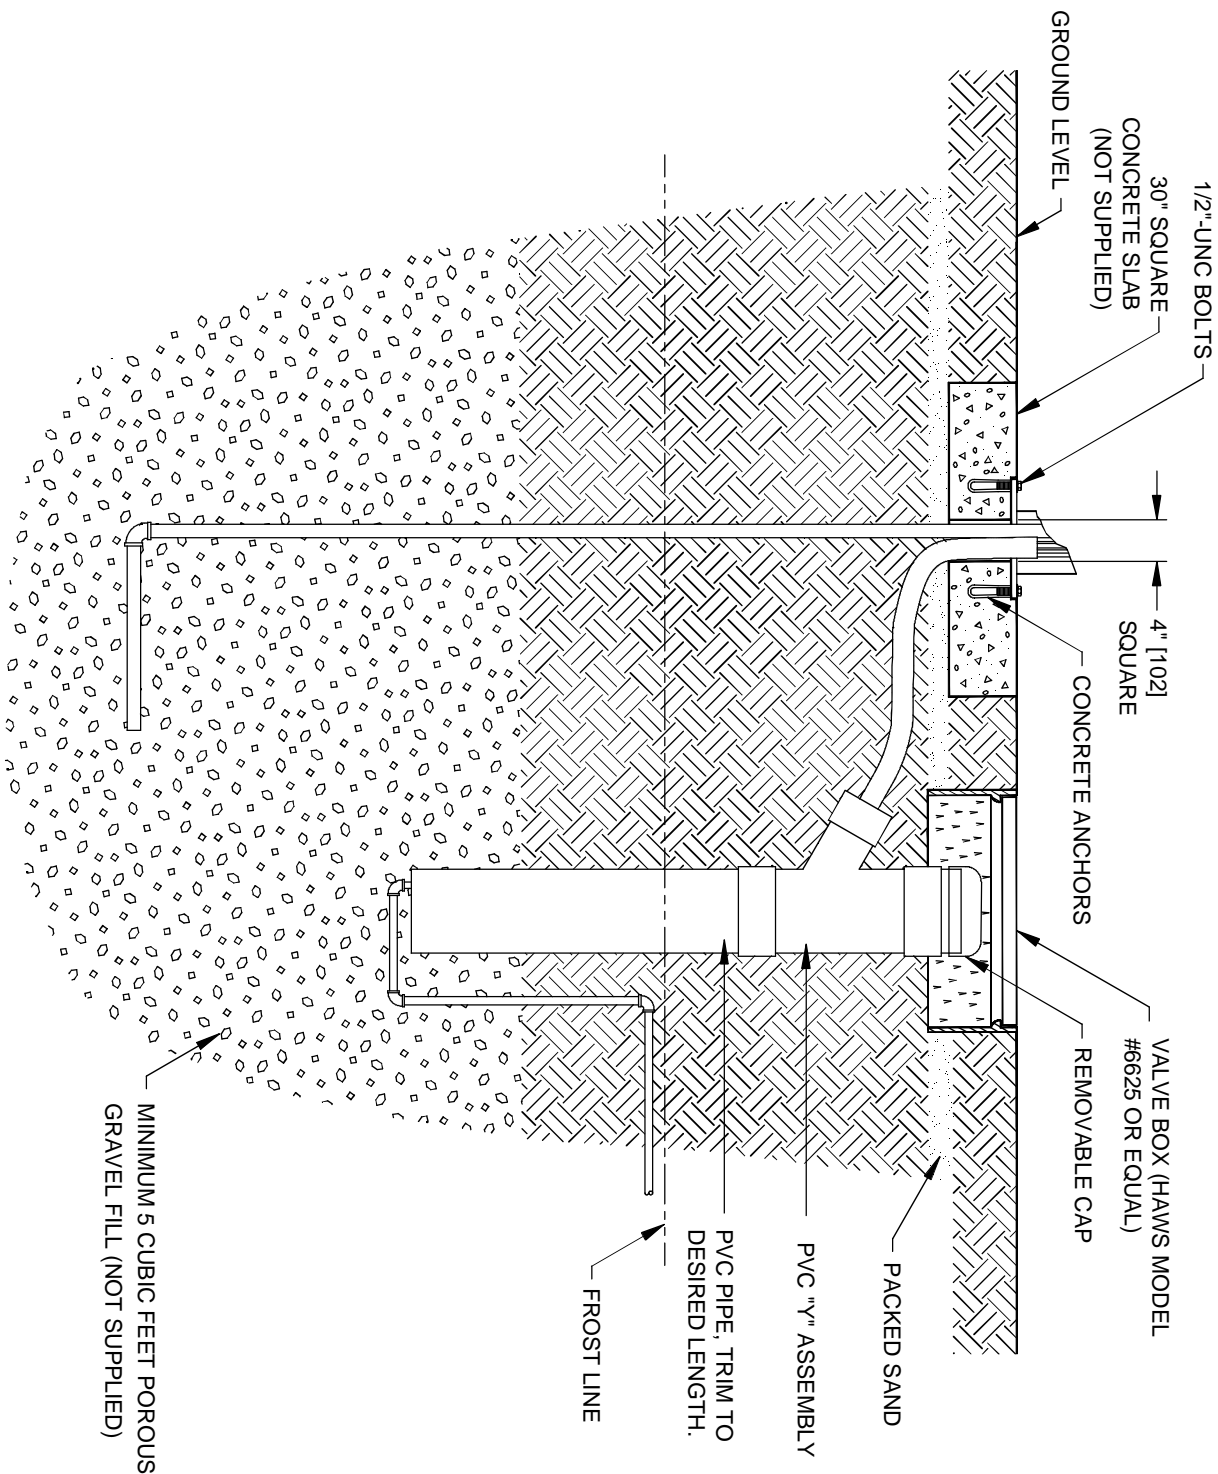

1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAW'S@HAWSCO.COM  
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PER BY:	MODEL(S)	PART NUMBER:
DRAWN: ECN: 4789 HM	6518FR	0002077777.D
TRF: DATE: CHK'D:	VALVE, FREEZE RESISTANT, SINGLE	DRAWING NO.: REV
APPROVED: Y280	SCALE: 1/2" = 1'-0"	08805A00 1/8
DATE:	DRAWING TYPE: INSTALLATION	SIZE: A SHEET: 3 OF 3