

FEATURES & BENEFITS

CONSTRUCTION

1" Schedule 40 IPS stainless steel pipe and fittings provide corrosion resistance in a long lasting product.

VALVES

Type 316 Stainless Steel stay-open ball valve is designed so the full flow of fluid remains on with a simple tug of the pull rod and is equipped with a stainless steel ball and stem to provide extra protection against corrosion and breakage.

PULL ROD

28" (71.1 cm) stainless steel triangular pull rod provides a reachable height for users while maintaining its durable design.

MOUNTING

Designed for horizontal installation, this drench shower is mounted sturdily from any wall.

QUALITY CONTROL

Valve assembly is pre-built for reduced installation time and an added peace of mind for the installer.

SAFETY

8" x 10-3/4" (20.3 x 27.3 cm) universal emergency sign make the unit easily detected in an emergency. Test card to record weekly checks helps maintain the unit best working quality.

SHOWER HEAD

AXION MSRT[™] stainless steel showerhead uses a hydrodynamic design to give equal distribution of water throughout the entire footprint of flow.



SPECIFICATIONS

Model 8133H horizontally mounted drench shower shall include the AXION MSRT[™] hydrodynamic design stainless steel showerhead with flow control, Schedule 40 Stainless Steel pipe and fittings, Type 316 Stainless Steel stay-open ball valve equipped with a stainless steel ball and stem, stainless steel pull rod with triangular handle, universal sign, and 1" IPS supply.

APPLICATIONS


Where the body of any person may be exposed to injurious or corrosive materials, suitable facilities for quick drenching or cleansing of the body shall be provided within the work area for immediate emergency use. Emergency eyewash facilities and deluge showers shall be in unobstructed and accessible locations that require no more than 10 seconds for the injured person to reach.

Model 8133H is certified by CSA to meet the ANSI Z358.1 Standard for Emergency Eyewash and Shower Equipment.

OPTIONS


- Alarm: Model 9001, 120 VAC emergency alarm and light system. Buzzer and flashing light are activated by a double pole, double throw flow switch.
- Shower Test Kit: Model 9010 shower test kit.
- Tempered Water Blending Valves: Model 9201E Emergency Valve thermostatically mixes hot and cold water to provide a safe fluid supply for emergency showers and eyewash equipment, with a flow rate of 31 gpm (117.3 L).
- Tempered Water Blending Valves: Model 9201H Lead-free Emergency Valve thermostatically mixes hot and cold water to provide a safe fluid supply for emergency showers and eyewash equipment, with a flow rate of 31 gpm (117.3 L).

To see all options for this model, visit www.hawsc.com

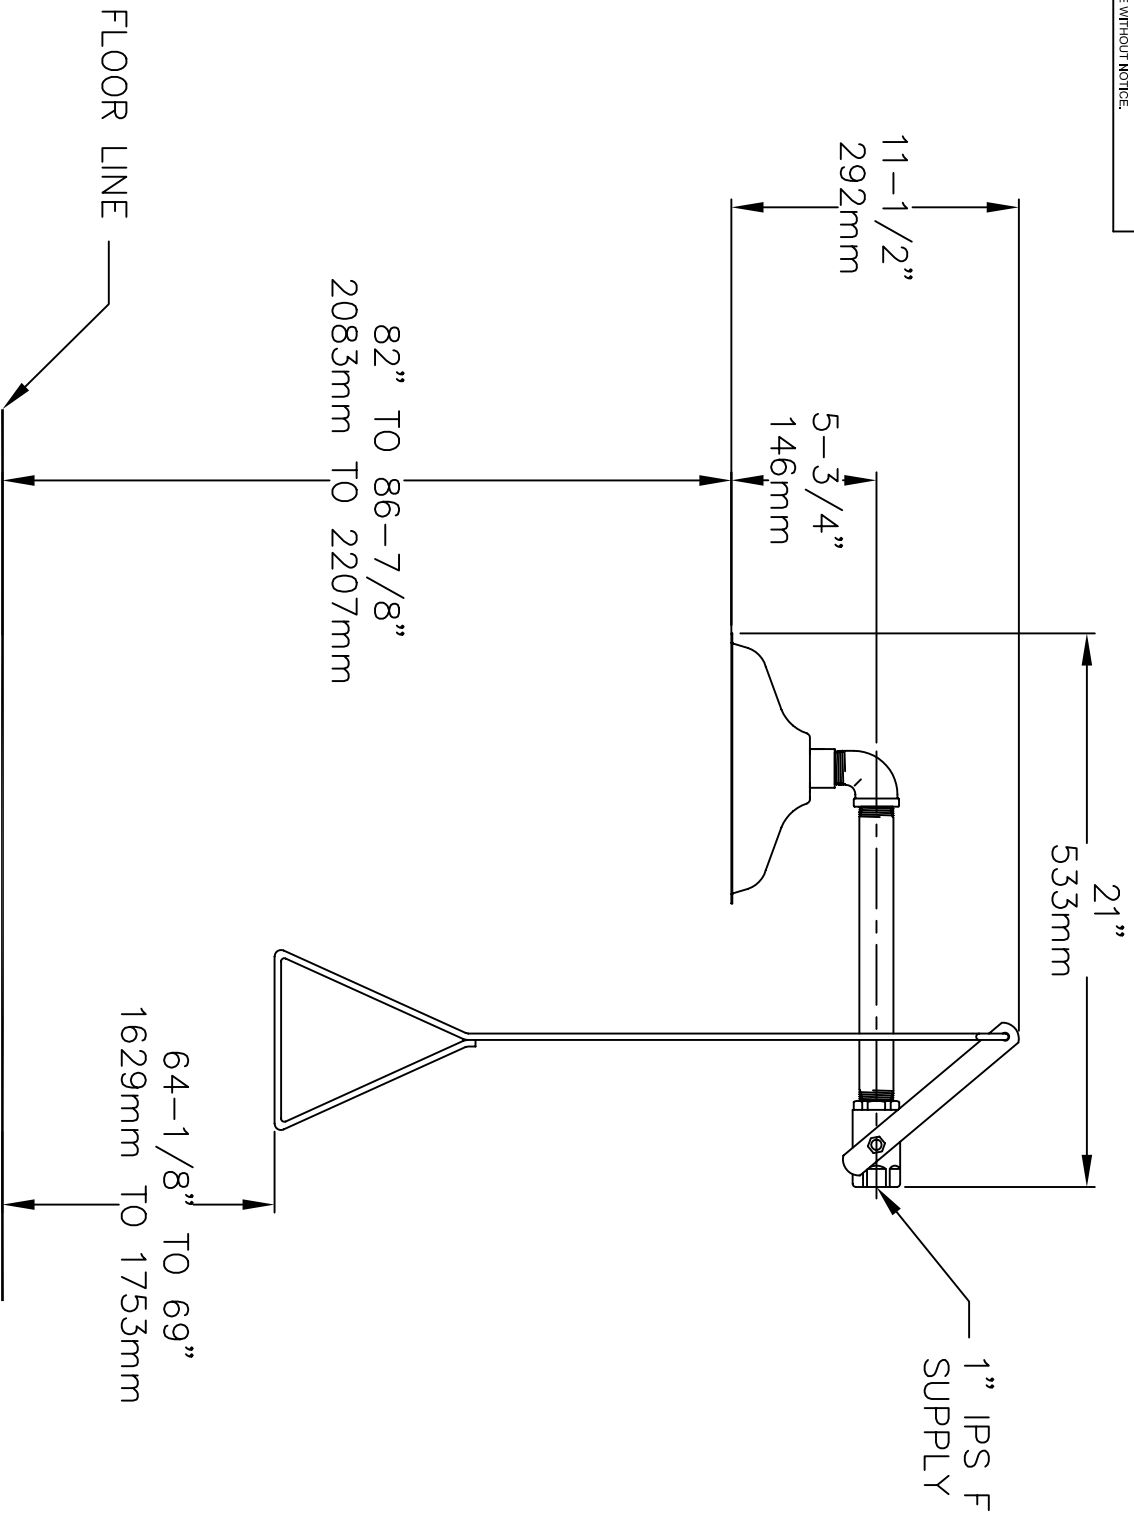

NOTES:

1. TO COMPLY WITH ANSI Z358.1-2009 FOR EMERGENCY SHOWER EQUIPMENT:
 - UNIT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND ACCEPTABLE PLUMBING PRACTICES.
 - SHOWER SHALL BE POSITIONED SO THAT SHOWER HEAD IS NOT LESS THAN 208.3 CM (82 IN.) NOR MORE THAN 243.8 CM (96 IN.) FROM SURFACE ON WHICH USER STANDS.
 - SHOWER SPRAY PATTERN SHALL HAVE A MINIMUM DIAMETER OF 50.8 CM (20 IN.) AT 152.4 CM (60 IN.) ABOVE SURFACE ON WHICH USER STANDS, AND CENTER OF SPRAY PATTERN SHALL BE LOCATED AT LEAST 40.6 CM (16 IN.) FROM ANY OBSTRUCTION.
2. DIMENSIONS MAY VARY ±1/2" [12.7mm].

EON NO. REVISED PER BY:		MODEL(S)	
DRAWN:	EONR. 4351 JR.	SHOWER	
DATE:	08/13/11	SCALE: 1/8"	
APPROVED:	DATE:	DRAWING TYPE:	INSTALLATION
		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 EMAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
PART NUMBER:		PART NUMBER:	
0002080135.D		0002080135.D	
DRAWING NO.:		DRAWING NO.:	
09415A00		09415A00	
SHEET: 1 OF 1		SHEET: 1 OF 1	