

FEATURES & BENEFITS

CONSTRUCTION

One-piece drinking fountains with low-profile design made of 14 gauge Type 304 stainless steel with 1/4" (.6 cm) thick stainless back plates welded in, and vandal-resistant stainless bottom plates.

BOTTLE FILLER

Vandal-resistant, 14-gauge Type 304 stainless steel bottle filler housing with push button operation and 1 gpm (3.78 L) laminar flow.

BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

FOUNTAIN VALVES

The push-button activated valves have all stainless steel bodies, with chrome plated brass push button assemblies which allow for front access to water stream adjustment, water control cartridge, and water supply strainer replacement without having to go through the bottom plate. Operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

VANDAL RESISTANT

The bubbler heads, push buttons, drain strainers and bottom plates are locked in place, discouraging unwanted vandal tampering.

MOUNTING

In-wall mounting frame is made of 16 gauge galvanized steel with welded-in heavy-duty 10 gauge mounting plate with pre-punched mounting holes. Further convenience is given to the chiller with the integral fold-out shelf.

ADA COMPLIANCE

ADA-compliant dual-height high low drinking fountain required for wheel chair use, and for the standing person.

OPTIONS

- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Cane Detection, Floor Mounted: Model SK6, floor mounted cane detection for the Haws Hi-Lo drinking fountains.

For more information, visit www.hawsco.com or call (888) 640-4297.



SPECIFICATIONS

Model 1117.8P electric low profile vandal-resistant wall mounted ADA water cooler and bottle filler shall include dual 14 gauge Type 304 Stainless Steel satin finish basins with integral 1/4" (.6 cm) thick stainless steel mounting plates, 16 gauge galvanized steel in-wall mounting frame with welded-in heavy-duty 10 gauge mounting plate, vandal-resistant push-button operated stainless steel valves with front-accessible cartridge, in-line strainer and flow adjustment, 100% lead-free waterways, polished chrome-plated brass vandal-resistant bubbler heads, and polished chrome-plated vandal-resistant waste strainers. Unit shall also include vandal-resistant stainless bottom plates, stainless steel satin finish back panel and louvered intrusion-proof grille, high and low fountain mounting levels, and 1-1/4" NPT concealed all cast-brass traps. The refrigeration system is hermetically sealed and delivers a minimum of 8 gph (30.3 L) of water at 50° F (10° C) cooled from 80° F (26.7° C) inlet water at 90° F (32.2° C) ambient. 115 Volts, 60Hz, rated watts: 370, full load amps: 5

FOR INDOOR USE ONLY

APPLICATIONS

Specifically, this type fountain may be placed in settings such as: schools, office buildings, shopping malls, and other indoor environments where there is a demand for a chilled water source and/or wheel chair access. Electric water coolers are not recommended or designed for outdoor applications or enclosed pool areas (chlorine). These conditions may void warranty. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1". Haws electric water coolers comply with ARI Standard 1010 and ANSI A117.1, and are listed by Underwriter Laboratories to U.S. and Canadian standards.



NOTES:

1. HOLD ROUGH-IN DIMENSIONS $\pm 1/8"$ (3.2mm)
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
3. REFER TO MTGFR LG INSTALLATION DRAWING FOR FRAME ROUGH-IN DIMENSIONS.
4. REFER TO 5874 SERIES OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.
5. ROUGH-IN DIMENSIONS FOR FOUNTAIN HEIGHTS:

ADULT WHEELCHAIR HEIGHT: SEE SHEET 2 FIG 2

WASTE: 29-1/4" (743mm)

FOUNTAIN: 27" (686mm)

BUBBLER: 32-7/8" (832mm)

ADULT STANDING HEIGHT: SEE SHEET 2 FIG 3


WASTE: 34-3/4" (883mm)

FOUNTAIN: 32-1/2" (826mm)

BUBBLER: 39-3/8" (972mm)



NOTES CONTINUED ON SHEET 2 OF 3

NOTE: FOR FILTERED WATER, OTHERS TO SUPPLY FILTER PRIOR TO THIS CONNECTION AND MOUNT TO SIDE OF MOUNTING FRAME IN THIS LOCATION.

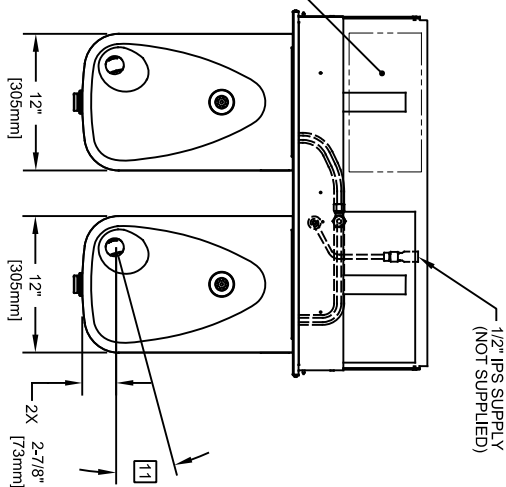


IMPORTANT: MOUNTING FRAME MUST BE INSTALLED SO THAT LIP OF FRAME FITS AGAINST FINISHED WALL FACE.

DETAIL A

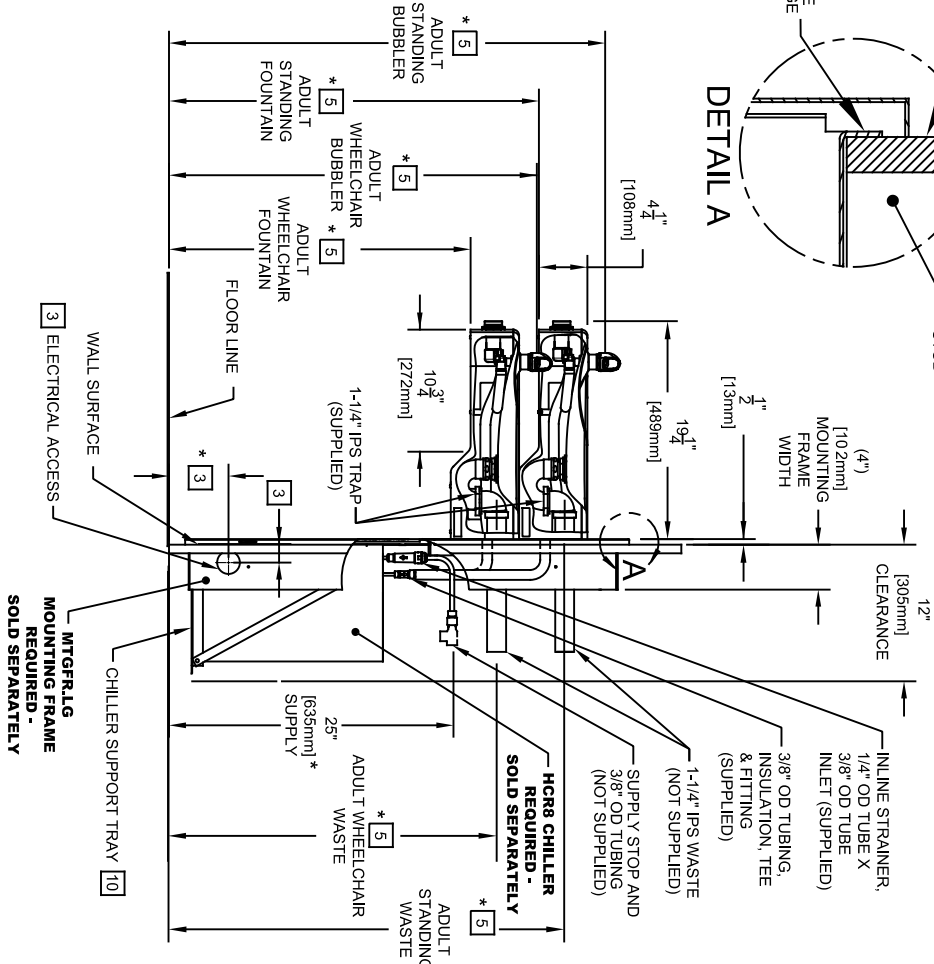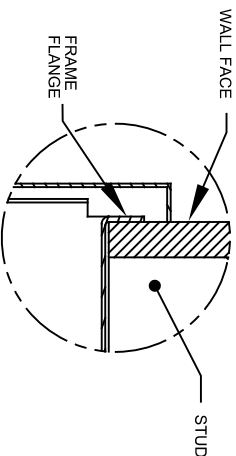

SEE SHEET 3 FOR OPTIONAL 1920/1920HO BOTTLE FILLER WATER DISPENSER, SHOWN INSTALLED OVER MODEL 1117.8

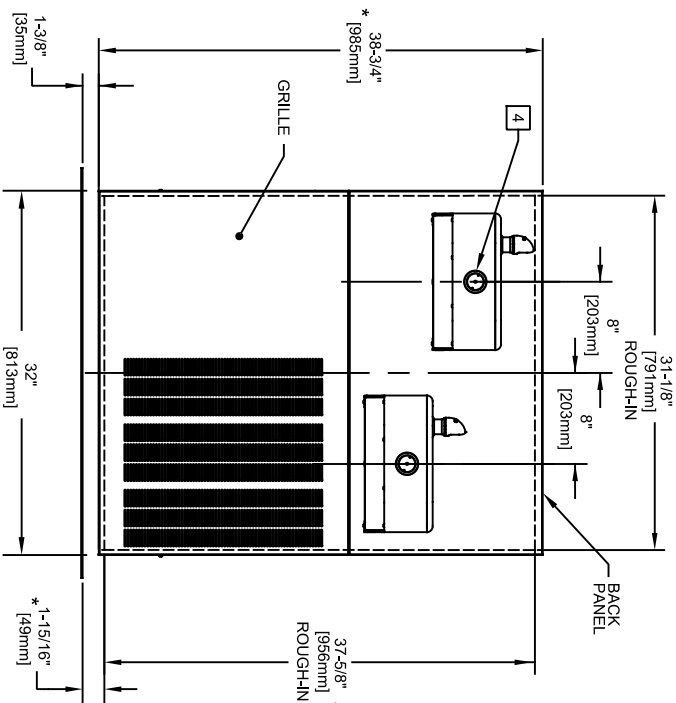



Since 1906

1455 KLEPPLE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. 5671	REVISED PER BY: J.G.	MODEL(S)	1117.8
DRAWN: DP	DATE: 03/24/21	CHKD: J.G.	
APPROVED: F.V.	DATE: 02/11/25	SCALE: N/A	DRAWING TYPE: INSTALLATION
SIZE: A			SHEET 1 OF 3
PART NUMBER 0510001192.D			REVISION 5

CALLOUT LEGEND	
A	1/4" OD WATER OUTLET
B	3/8" OD WATER INLET
C	TEMPERATURE CONTROL
D	JUNCTION BOX
E	ELECTRICAL WIRING OPENING

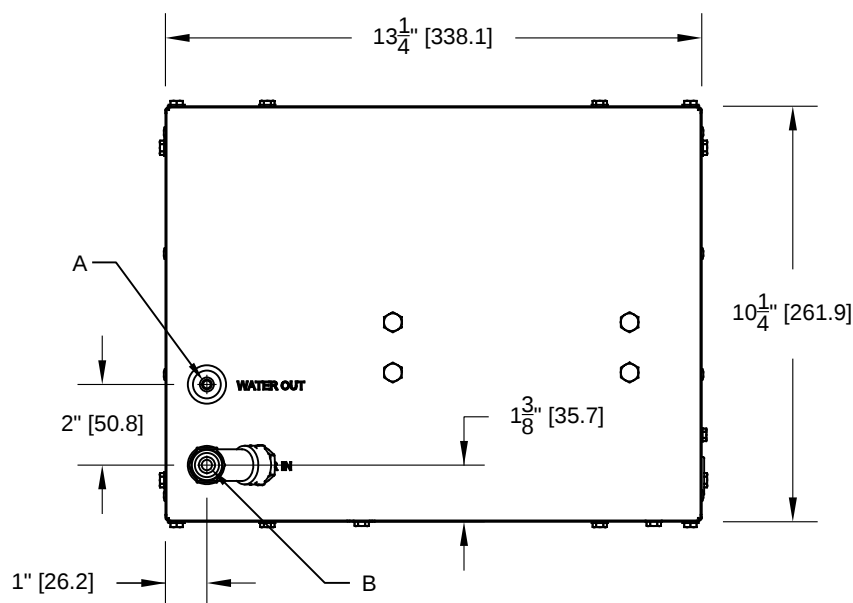


FIG. 2

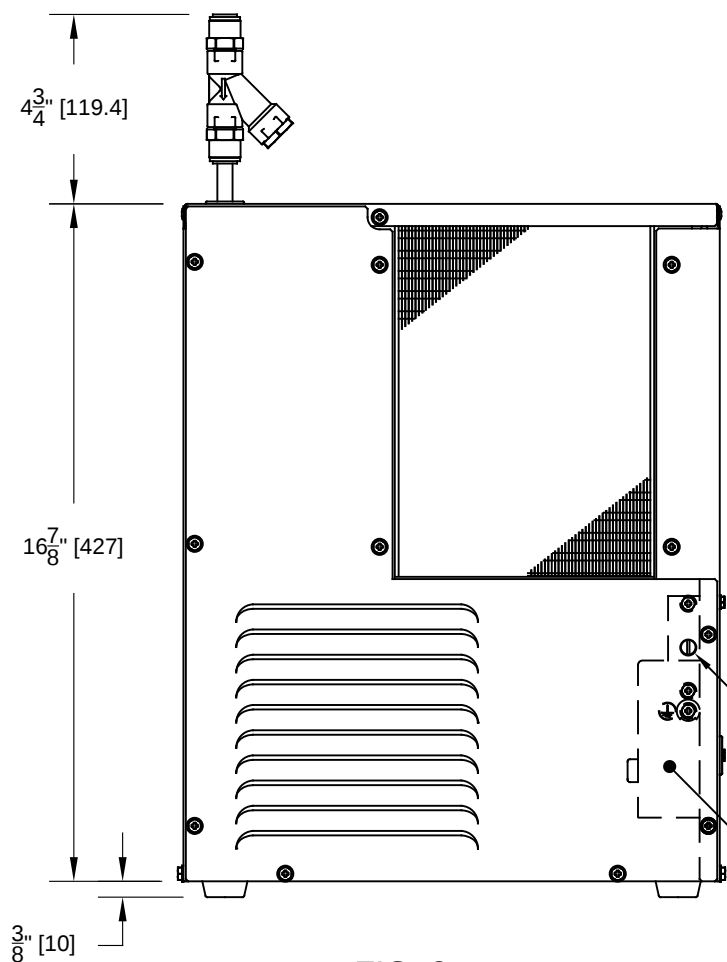


FIG. 3

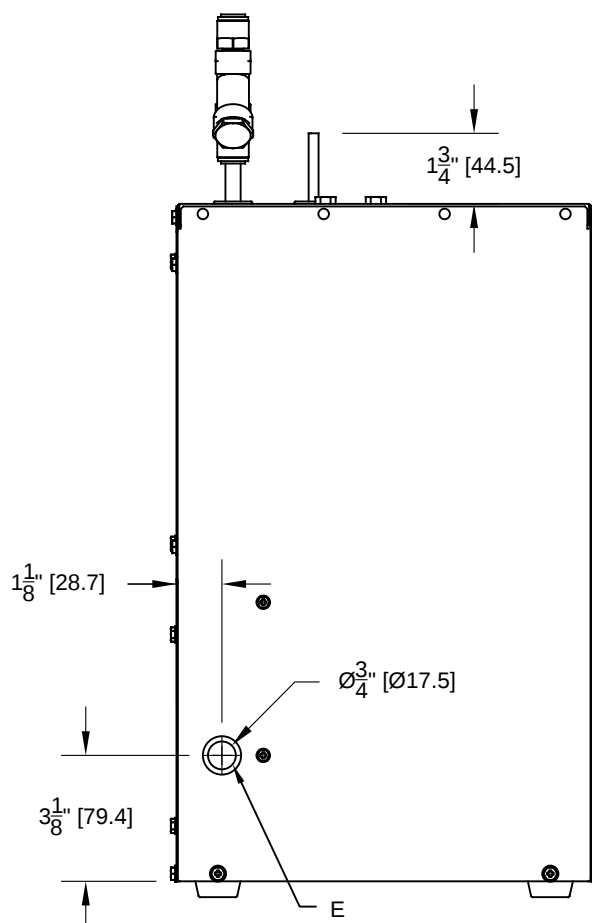


FIG. 4

		Haws®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 4997 ECN: 5401 DATE 01/25/16 DATE 02/05/19		MODEL(S) HCR8 REMOTE CHILLER	
DRAWN VWC APPROVED JL		CHECKED DHP DATE 01/25/16 DATE 02/05/19		PART NUMBER 0580000134.D REVISION 4	
SCALE: NA		DRAWING TYPE: INSTALLATION		SIZE: A SHEET 1 OF 2	

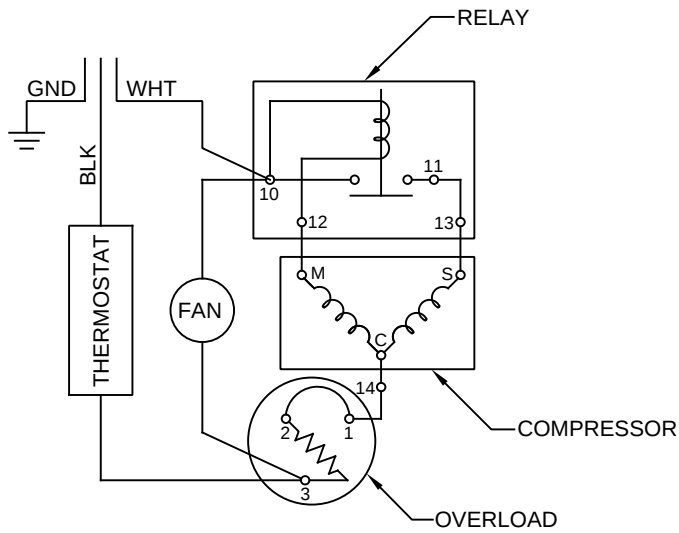


FIG. 5
WIRING DIAGRAM


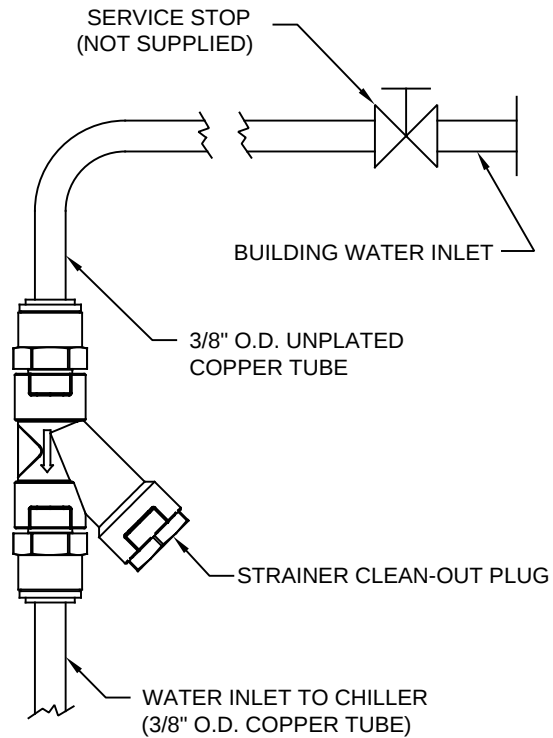



FIG. 6
WATER CONNECTION DIAGRAM


				1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSO.COM WEBSITE: WWW.HAWSO.COM			
ECN NO. 4997	REVISED PER ECN: 5401	BY DHP	DATE 01/25/16	CHKD DHP	MODEL(S) HCR8 REMOTE CHILLER		PART NUMBER 0580000134.D
DRAWN VWC	DATE 01/25/16	CHKD DHP	DATE 02/05/19	SCALE: NA	DRAWING TYPE: INSTALLATION	SIZE: A	SHEET 2 OF 2

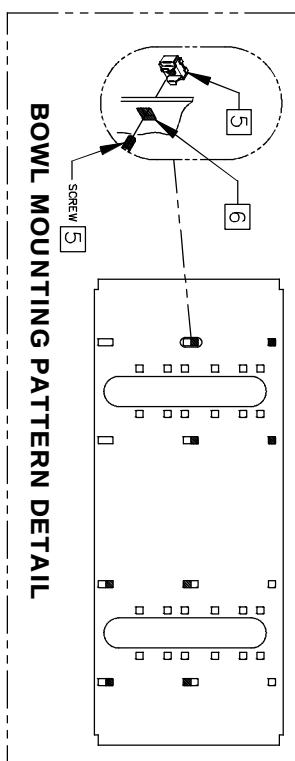

1. ENSURE ELECTRICAL POWER IS OFF AND POWER MATCHES VOLTAGE, PHASE AND CYCLE LISTED ON CHILLER LABEL.
2. REMOVE FRONT PANEL TO GAIN ACCESS TO INTERNAL JUNCTION BOX.
3. HARDWIRE CHILLER THROUGH ITS SIDE WIRE IN ACCORDANCE WITH LOCAL, STATE OR FEDERAL CODES
4. REPLACE FRONT PANEL. DO NOT APPLY POWER UNTIL WATER SUPPLY IS CONNECTED AND ON.

1. THIS FRAME IS USED WITH SEVERAL DIFFERENT MODELS. SEE INSTALLATION INSTRUCTIONS RECEIVED WITH THE FOUNTAIN FOR PROPER LOCATIONS OF 5/16"-18 PANEL NUT RETAINERS. FOR ROUGH-IN USE THE APPROPRIATE DIMENSIONS SHOWN ABOVE. WASTE AND SUPPLY HEIGHTS ARE ALSO DETAILED ON THE FOUNTAIN INSTALLATION INSTRUCTIONS.
2. HOLD ROUGH-IN DIMENSIONS $\pm 1/8"$ (3.2mm).
3. WHEN INSTALLING THIS UNIT LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO. FOR DIFFERENT INSTALLATION HEIGHTS, OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
4. ALIGN HOLES IN CHILLER SUPPORT TRAY WITH HOLES IN FRAME AND FASTEN IN PLACE WITH #10 SHEET-METAL SCREWS SUPPLIED WITH UNIT.
5. FOUNTAIN REMOVAL: FIRST REMOVE SCREWS AND THEN SQUEEZE CLIPS ON NUT RETAINER TO POP OUT. INSTALL IS REVERSE OF REMOVAL.
6. HOLE COMBINATION SHOWN ABOVE IS FOR USE WITH LOW FOUNTAIN ON THE RIGHT AND HIGH FOUNTAIN ON THE LEFT. USE OPPOSITE HOLES FOR HIGH ON RIGHT AND LOW ON LEFT.
7. IMPORTANT: A L.H. LOW (OPTIONAL) CONFIGURATION WILL REQUIRE A DIFFERENT BACK PANEL AND THE WASTE AND SUPPLY DIMENSIONS SHOWN (*) MUST BE REVERSED.





Haws[®]
Corporation

INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)

1455 Kleppe Ln, Sparks NV 89431
 Phone: 775-359-4712 Fax: 775-359-7424
 Haws Ag Bachweg 3 CH-3401 Burgdorf Switzerland
 Haws Mfg Pte Ltd 74 Sungei Kadat Loop Singapore 72953
 e-mail: Haws@hawsco.com website: www.hawsco.com

CAT. NO.		REQUEST PER.		PRT.	
ORDER NO.		ECON. 4181		VWC	
D ZHUOL		06 / 97		SRO:	
APPROVED:		DATE:			
MODEL(S):					
MTGR.LG MOUNTING FRAME DUAL					
INFO FAX DOC # 2654					
SCALE: 1:16		DRAWING TYPE: INSTALLATION/FAKBACK			
SIZE: A		SHT: 1		OF 1	
DRAWING NUMBER:		PART NUMBER:		REQ.	
06665A00		0002080378		18	

1920 INDEX

INSTALLATION WITH:	TYPICAL USES	SEE SHEET...
1001/1011 BOWLS	HAWS SERIES 1001, H1001.8X, 1011, 1011.8X STYLE FOUNTAINS	3 OF 9
1109/1119 BOWLS		4 OF 9
1107/1117 BOWLS		5 OF 9
1311/1501 BOWLS		6 OF 9
1047		7 OF 9
6468		8 OF 9
CHILD HEIGHT	HAWS 1107P STD CONFIG CHILD HEIGHT, 1109P STD CONFIG CHILD HEIGHT, 1311P STD CONFIG CHILD HEIGHT	9 OF 9





1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY: J.G.
DRAWN BY: DATE: CHKD: J.G.
APPROVED: DATE: 11/2/24



MODEL(S)
1920/1920HPS/1920W

PART NUMBER
0510000490.D
REVISION
13

SCALE: N/A DRAWING TYPE: INSTALLATION SIZE: A SHEET 1 OF 9

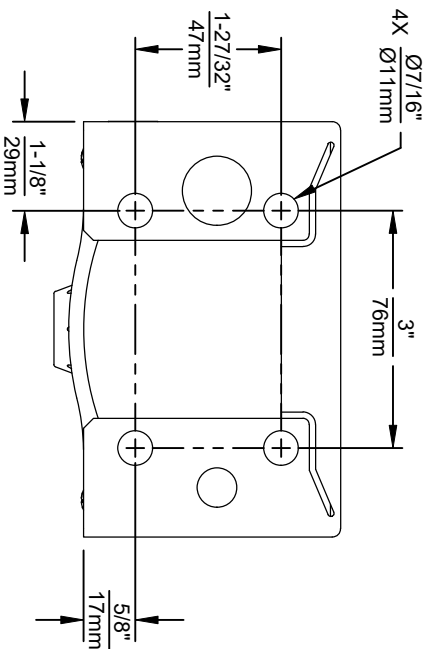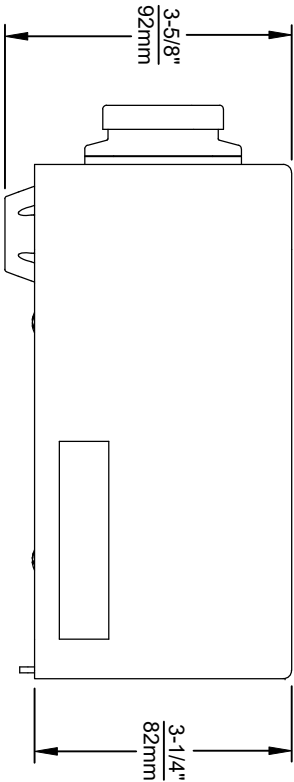

1920 SERIES MOUNTING HOLE LOCATIONS
(3/8"-16 UNC MOUNTING HARDWARE NOT SUPPLIED)

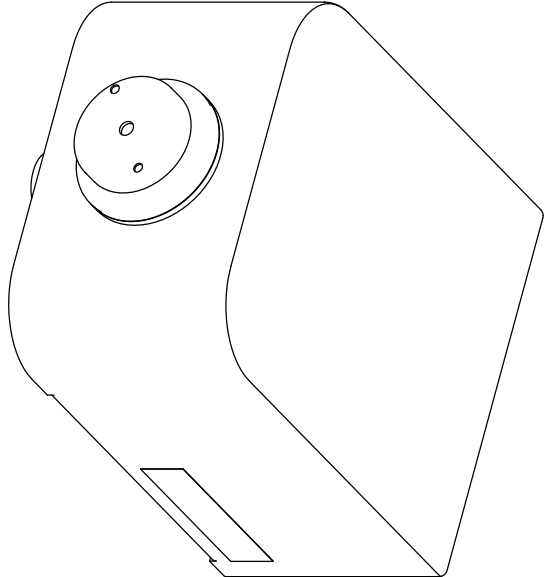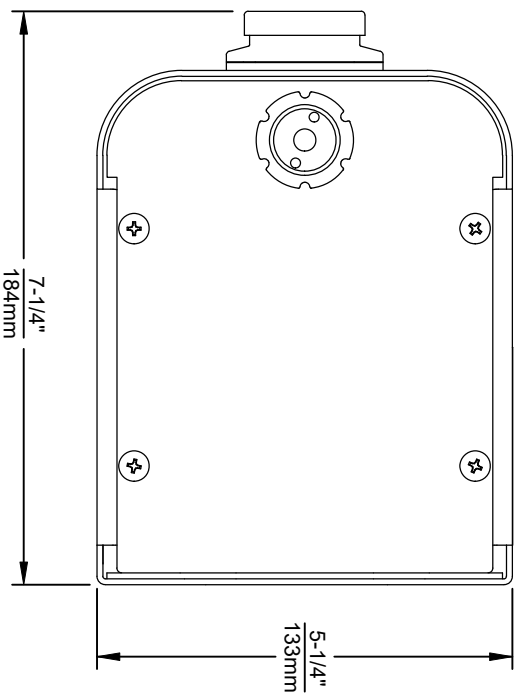

NOTES:


1. SEE SHEETS 2 THRU 7 FOR BOTTLE FILLER ADULT ADA HEIGHT APPLICATIONS AND SHEET 8 FOR CHILD ADA HEIGHT APPLICATIONS.
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.




Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER BY:	MODEL(S)	PART NUMBER
5041	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN	DATE	CHKD	REVISION
1855/6	J.G.		13
APPROVED:	DATE	SCALE: N/A	SHEET 2 OF 9
RH	11/2/24	DRAWING TYPE: INSTALLATION	

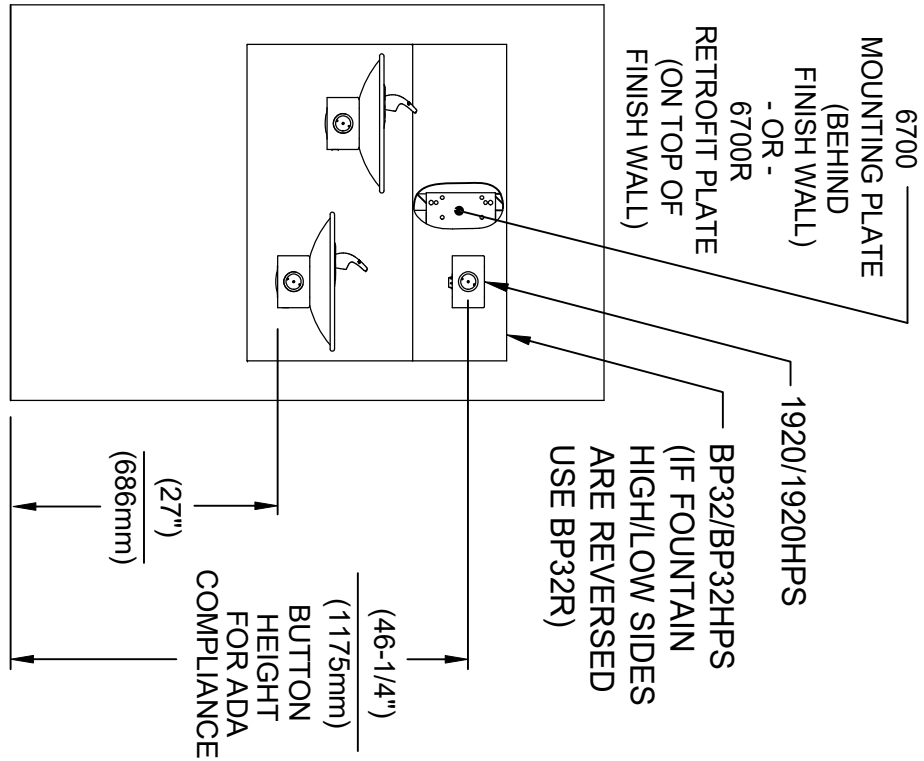

INSTALLATION ABOVE HAWS 1011 & H1011.8 SERIES

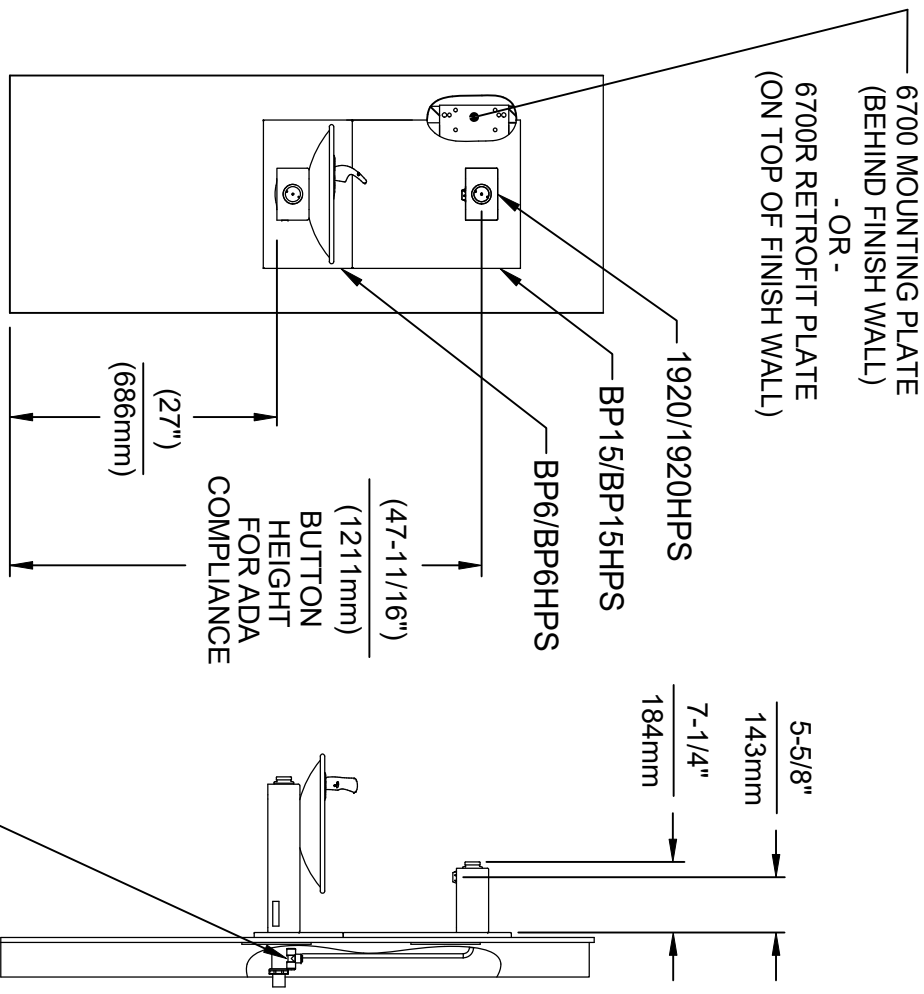


INSTALLATION ABOVE HAWS 1001 & H1001.8 SERIES

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

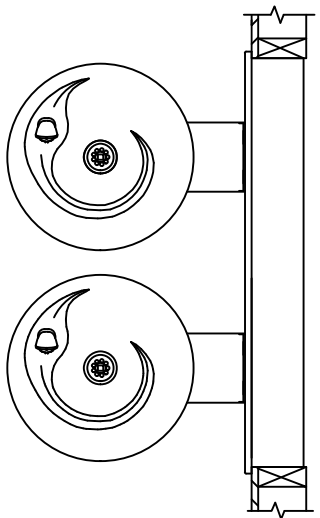

3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)



Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY: J.G.
DATE: 01/01/17
DRAWN: J.G.
APPROVED: J.G.
SCALE: N/A
DRAWING TYPE: INSTALLATION
SIZE: A
SHEET: 3 OF 9

MODEL(S)
1920/1920HPS/1920W

PART NUMBER
0510000490.D
REVISION
13

COUNTING PLATE
(BEHIND
FINISH WALL)

6700R

RETROFIT PLATE

(ON TOP OF
FINISH WALL)

1920

BP32

(IF FOUNTAIN
HIGH/LOW SIDES

ARE REVERSED
USE BP32R)

6469

(47-5/8")

(1210mm)

**BUTTON
HEIGHT
FOR ADA
COMPLIANCE**

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATT
(ON TOP OF FINISH WA

OR

6700R RETROFIT PLATE

(ON TOP OF FINISH WALL)

1920

BP15

(47-5/8")

(1210mm)

**BUTTON
HEIGHT
FOR ADA
COMPLIANCE**

(686mm)

The diagram shows the front panel of the device. On the left side, there is a power switch and a power indicator light. On the right side, there is a power switch and a power indicator light. The power switch is located on the left side of the front panel, and the power indicator light is located on the right side of the front panel. The power switch is a rocker switch, and the power indicator light is a small circular light. The power switch is labeled 'ON' and 'OFF'.

A technical diagram of a door lock assembly. It shows a rectangular door with a handle and a lock cylinder. A callout line points to the handle. Another callout line points to the lock cylinder. A third callout line points to a small rectangular component on the door. A fourth callout line points to a circular component on the door. A fifth callout line points to a rectangular component on the door. A sixth callout line points to a circular component on the door. A seventh callout line points to a rectangular component on the door. An eighth callout line points to a circular component on the door. A ninth callout line points to a rectangular component on the door. A tenth callout line points to a circular component on the door.

5-5/8"
143mm
7-1/4"
184mm

7-1/4"

184mm


INSTALLATION ABOVE HAWS 1119 & H1119.8 SERIES

INSTALLATION ABOVE HAWS 1109 & H1109.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

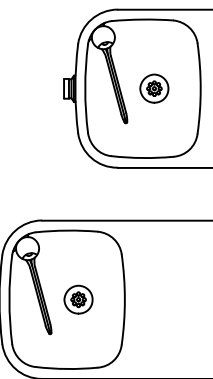



3/8" O.D. SUPPLY

TUBING AND 3/8" O.D.

PUSH-IN TEE SUPPLIED.

(CONNECT TO FOUNTAIN
SUPPLY LINE)

ECN NO.		REVISED PART#:		MODEL(S)		PART NUMBER	
5081		JIG		1920/1920HPS/1920W		0510000490.D	
DRAWN:		DATE:		CHKD:		REVISION	
MJ		01/30/07		JG		13	
APPROVED:		DATE:					
RH		11/28/04					
SCALE:		N/A		DRAWING TYPE:		SIZE: A	
						SHEET 4 OF 9	

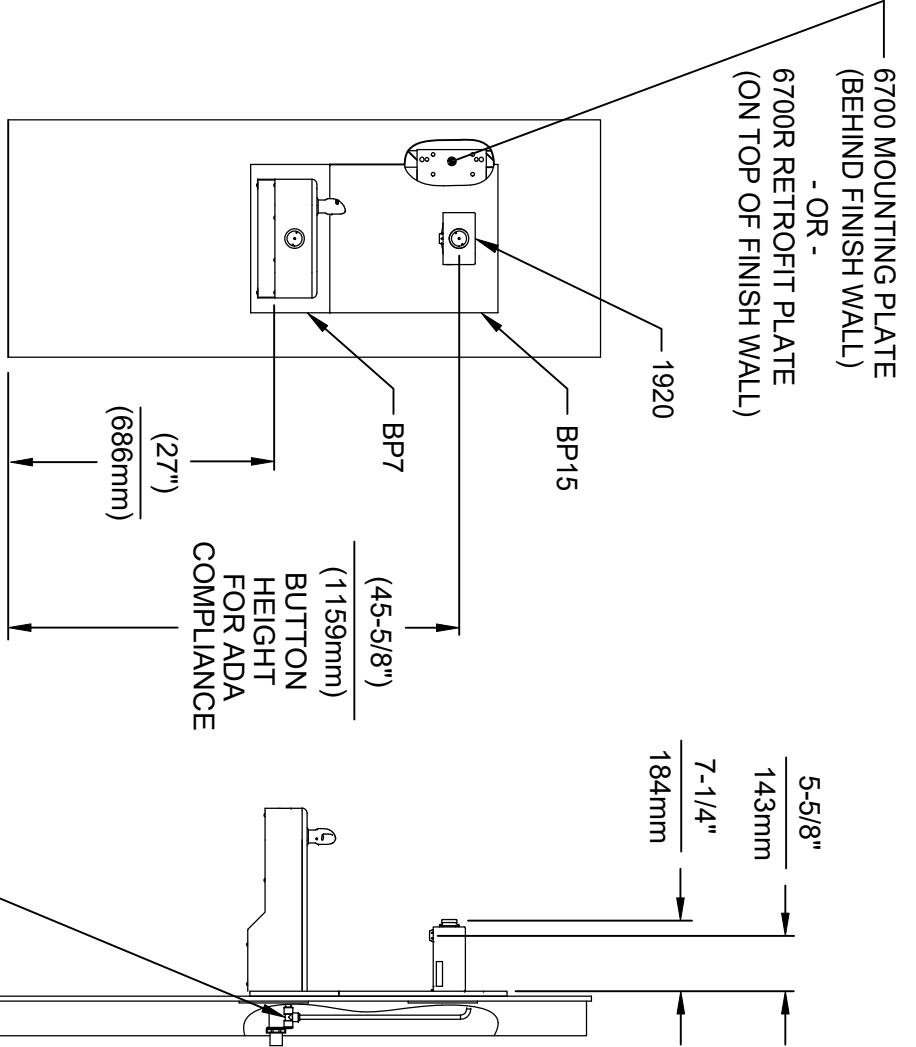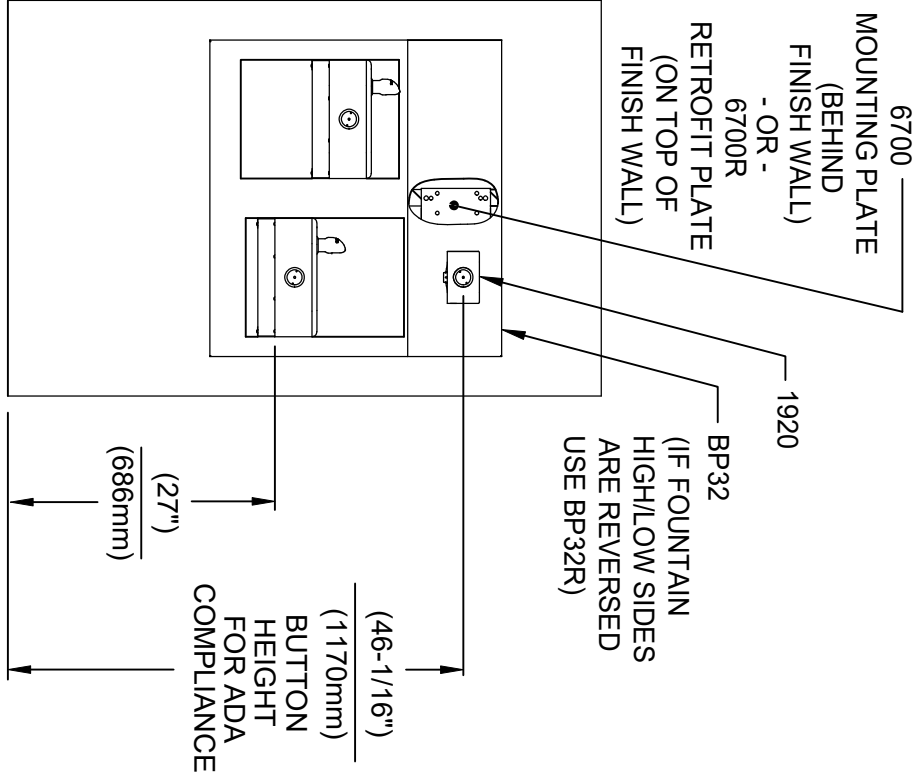


INSTALLATION ABOVE HAWS 1117L & H1117.8 SERIES

**INSTALLATION ABOVE HAWS 1107L & H1107.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.




3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)




Haws
Since 1906

ECON. NO. REVISED PER BY		MODEL(S)	
5081	ECON. 6131 J.G.	1920/1920HPS/1920W	
DRAWN BY	DATE: CHG. DATE	PART NUMBER	
RH	11/29/24	0510000490.D	
APPROVED:		REVISION	
11/29/24		13	
SCALE: N/A		DRAWING TYPE: INSTALLATION	
SIZE: A		SHEET 5 OF 9	

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

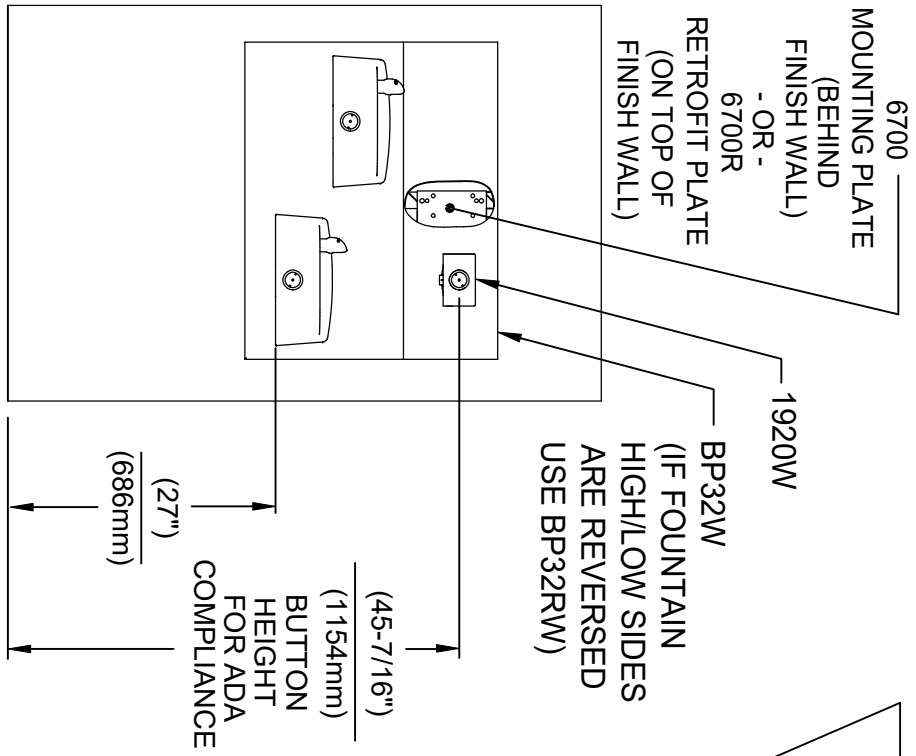


INSTALLATION ABOVE HAWS 1501

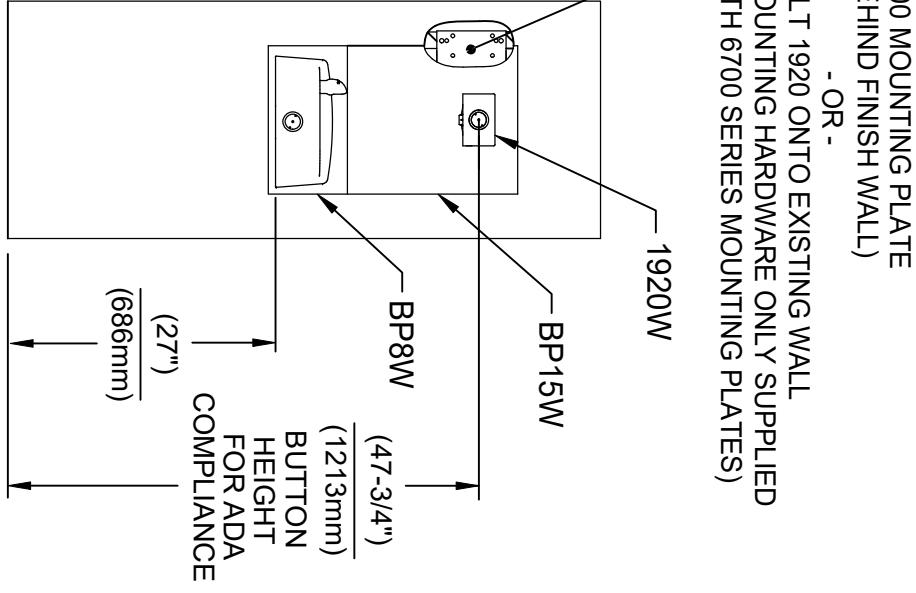


INSTALLATION ABOVE HAWS 1311

SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT

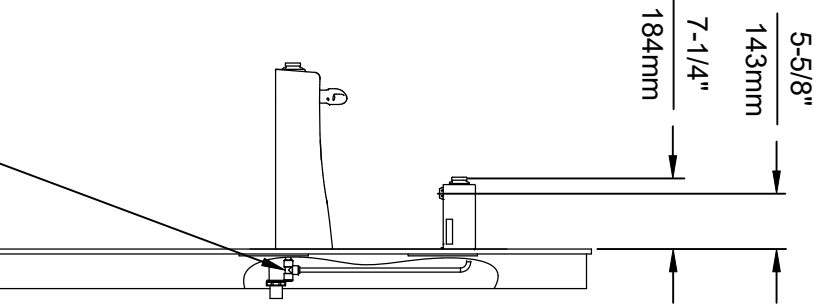

3/8" O.D. SUPPLY
TUBING AND 3/8" O.D.
PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN
SUPPLY LINE)

- * IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS
1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
 2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

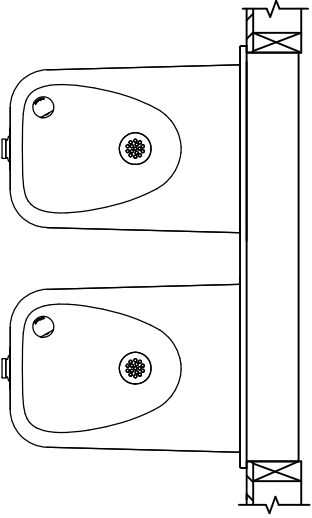




Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5081	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN	DATE	CHKD	REVISION
W	02/25/17	J.G.	13

APPROVED: RH DATE 11/29/24 SCALE: N/A DRAWING TYPE: INSTALLATION SIZE: A SHEET 6 OF 9



6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
BOLT 1920 ONTO EXISTING WALL
(MOUNTING HARDWARE ONLY SUPPLIED
WITH 6700 SERIES MOUNTING PLATES)

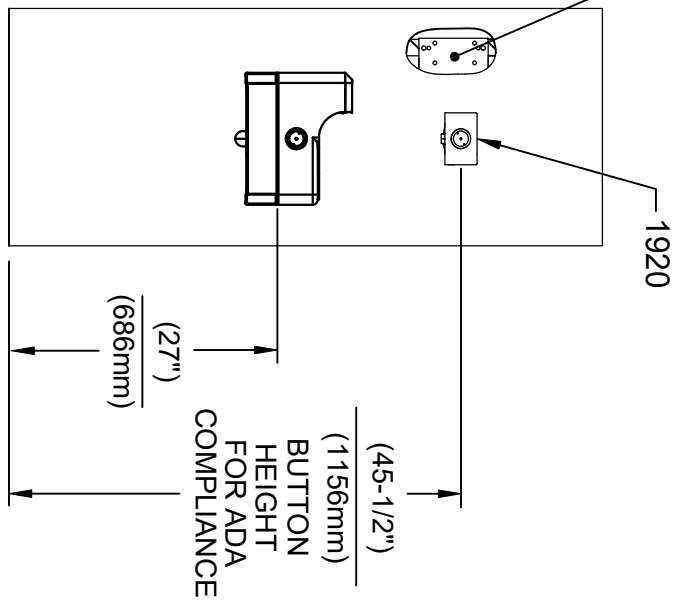

INSTALLATION ABOVE HAWS 1047

* IF YOUR FOUNTAIN IS THIS STYLE USE
THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS
FOR MOUNTING PLATES AND BACK PANELS
(SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL,
STATE OR FEDERAL CODES SHOULD
BE ADHERED TO FOR INSTALLATION
LOCATIONS, WASTE & SUPPLY
REQUIREMENTS OTHER THAN SHOWN.

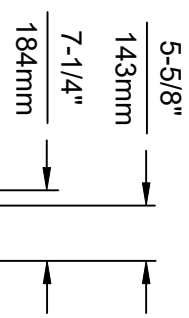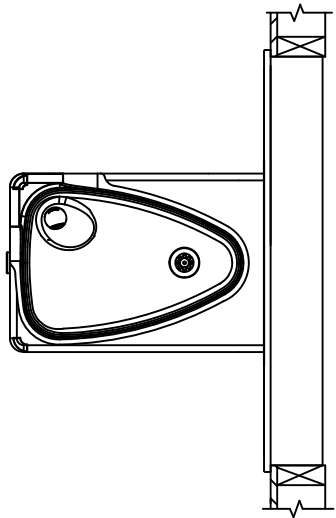

3/8" O.D. SUPPLY
TUBING AND 3/8" O.D.
PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN
SUPPLY LINE)


**Haws**
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5220	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRW P	DATE	CHG	REVISION
RH	11/29/24	J.G.	13
APPROVED:	SCALE: N/A	DRAWING TYPE: INSTALLATION	SHEET 7 OF 9


6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

* MODELS 1920 (BOTTLE FILLER),
BP15, BP6 (BACK PANELS) AND
6468 (WASTE DRIP TRAY) ARE
ALL AVAILABLE TOGETHER AS
MODEL 1922.

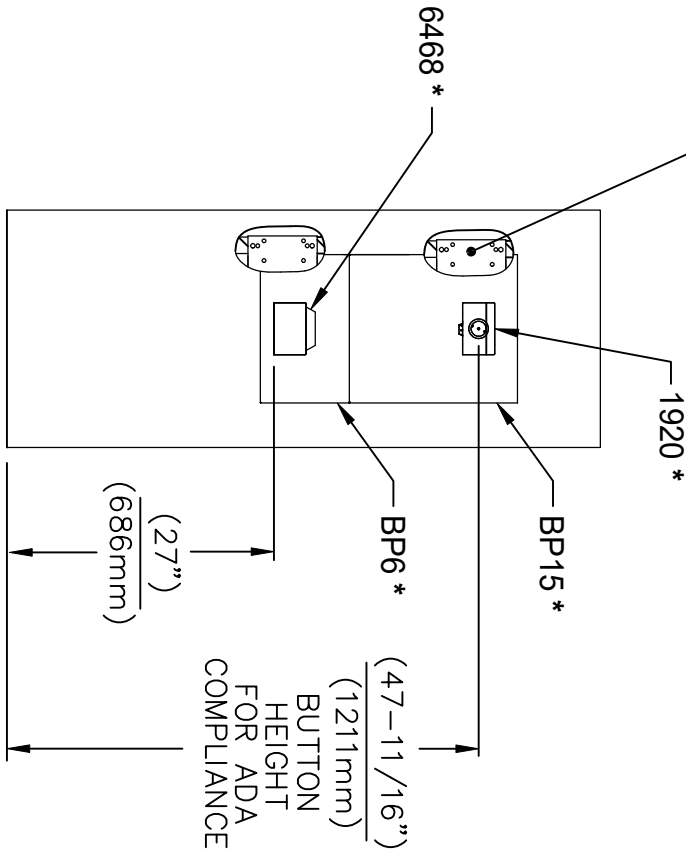

INSTALLATION ABOVE 6468

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATE, WASTE DRIP TRAY AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

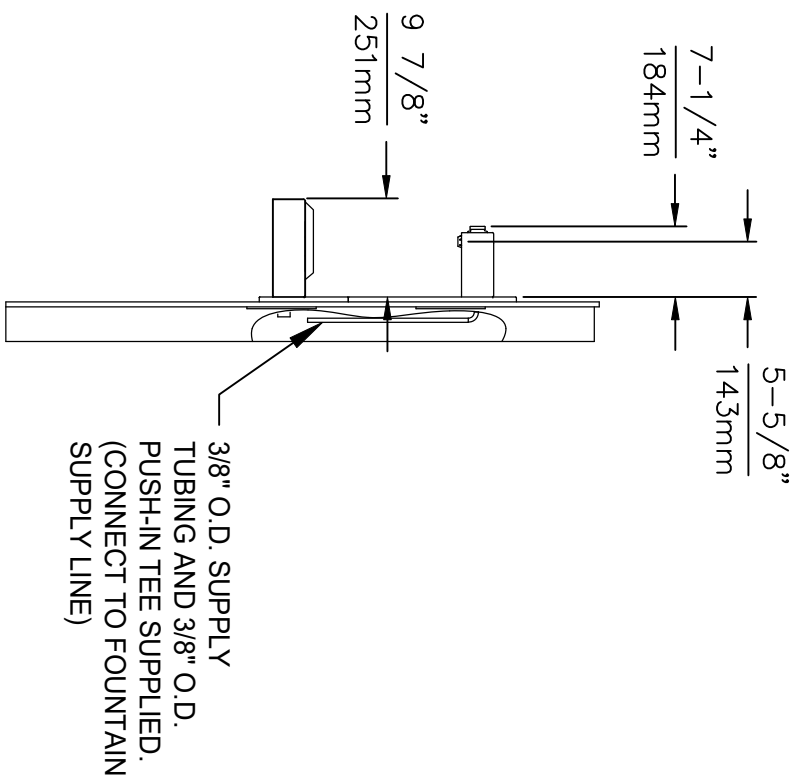





Haws®
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EQD NO.	REVISED PER BY	MODEL(S)	PART NUMBER
6468	EQD 6/13 J.G.	1920/1920HPS/1920W	0510000490.D
DRWD	DATE	CHKD	REVISION
10/20	10/20	J.G.	13
APPROVED:	DATE	SCALE:	SIZE:
RH	11/29/24	N/A	A
DRAWING TYPE:		SHEET 8 OF 9	
INSTALLATION:			

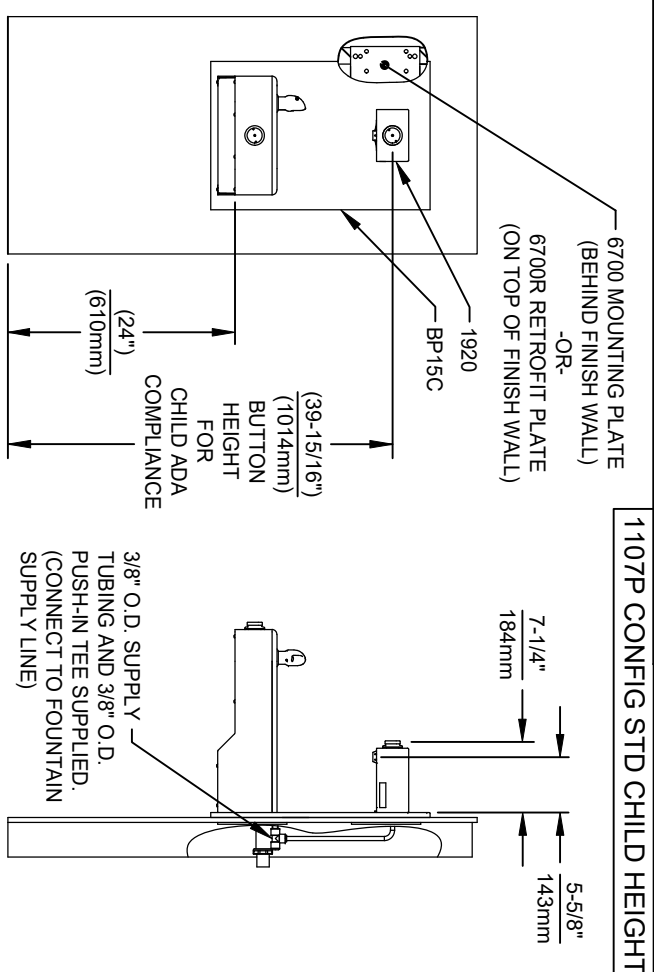


INSTALLATION FOR 1107P CONFIG STD CHILD HEIGHT

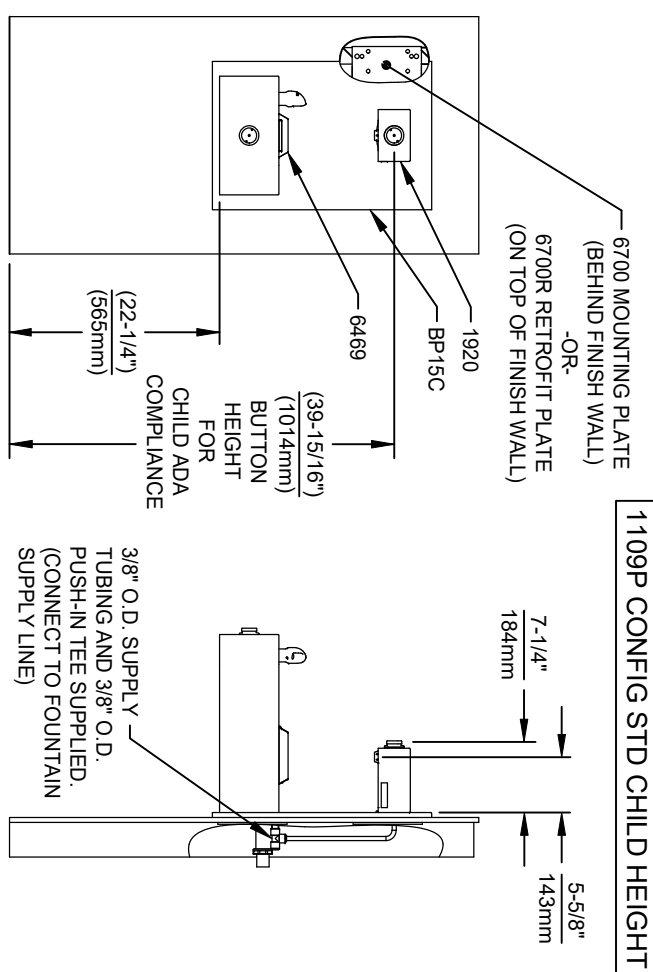

1109P CONFIG STD CHILD HEIGHT

INSTALLATION FOR 1109P CONFIG STD CHILD HEIGHT
MUST USE PARALLEL APPROACH WITH THIS BOWL COMBINATION

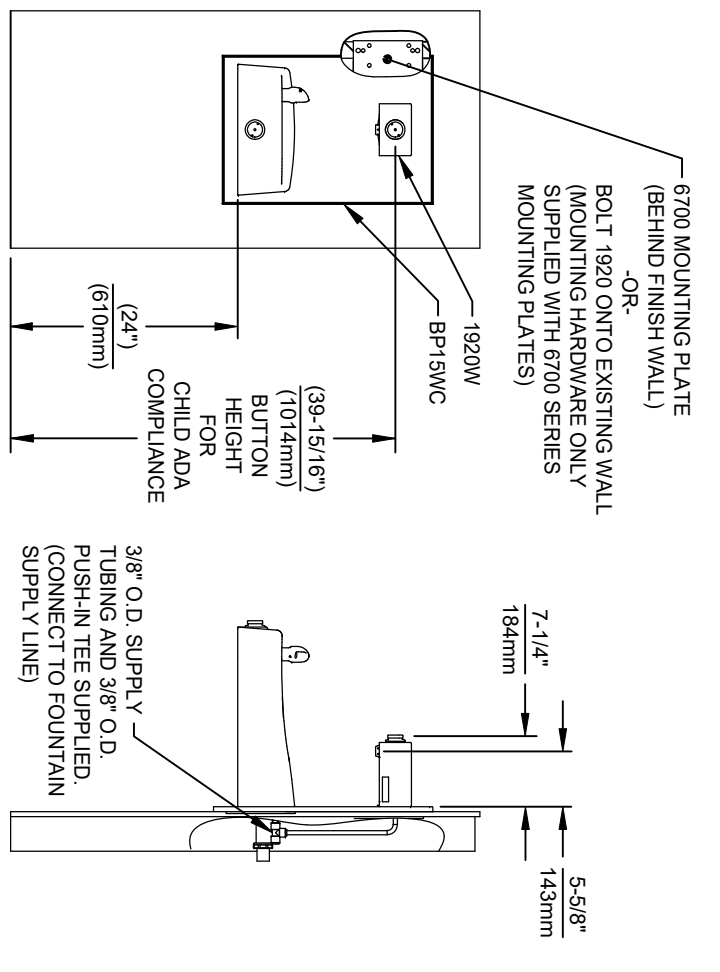

INSTALLATION FOR 1311P CONFIG STD CHILD HEIGHT

- NOTES:
1. HEIGHT DIMENSIONS SHOWN ARE FOR CHILD ADA APPLICATIONS:
 - BOTTLE FILLER HEIGHT AT 40" MAX.
 - DRINKING FOUNTAIN BUBBLER HEIGHT AT 30" MAX. (SEE SHEETS 3, 4 & 5 FOR ADULT ADA HEIGHT DIMENSIONS)
 2. SEE SEPARATE 6700 DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - SOLD SEPERATELY OR PART OF A BUNDLED PRODUCT).
 3. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



Haws®
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EQ: NO. REVISED PER BY: J.G.	MODEL(S)	PART NUMBER
6700 EQ: 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN BY: J.G.		REVISION
DATE: 11/29/24		13
APPROVED: RH	SCALE: N/A	DRAWING TYPE: INSTALLATION
		SIZE: A
		SHEET 9 OF 9

6700 INDEX

INSTALLATION WITH:	TYPICAL USES	SEE SHEET ...
GENERAL INSTALLATION	IMPORTANT INFORMATION FOR ALL INSTALLATIONS	3 OF 6
1001 BOWLS	HAWS SERIES 1001X, 1001.8X	3 OF 6
1107 BOWLS	HAWS SERIES 1107X, 1107.8X	3 OF 6
1109 BOWLS	HAWS SERIES 1109X, 1109.8X	3 OF 6
1047 BOWLS	HAWS SERIES 1047	4 OF 6
1011 BOWLS	HAWS SERIES 1011X, 1011.8X	4 OF 6
1119 BOWLS	HAWS SERIES 1119X, 1119.8X	4 OF 6
1117 BOWLS	HAWS SERIES 1117X, 1117.8X	5 OF 6
1311 BOWLS	HAWS SERIES 1311	5 OF 6
1501 BOWLS	HAWS SERIES 1501	5 OF 6
CHILD HEIGHT	HAWS 1107PCH, 1109PCH, 1311PCH	6 OF 6



Haws





Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PER BY: JG
DRAWN: JG
DATE: 10/03/24
APPROVED: JG

MODEL(S)
67/00

PART NUMBER
0002080016
REVISION
26

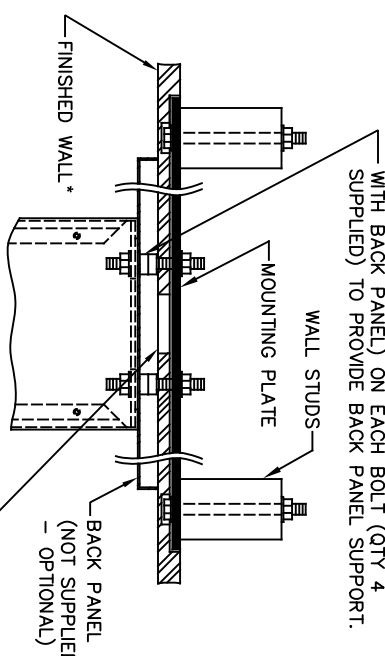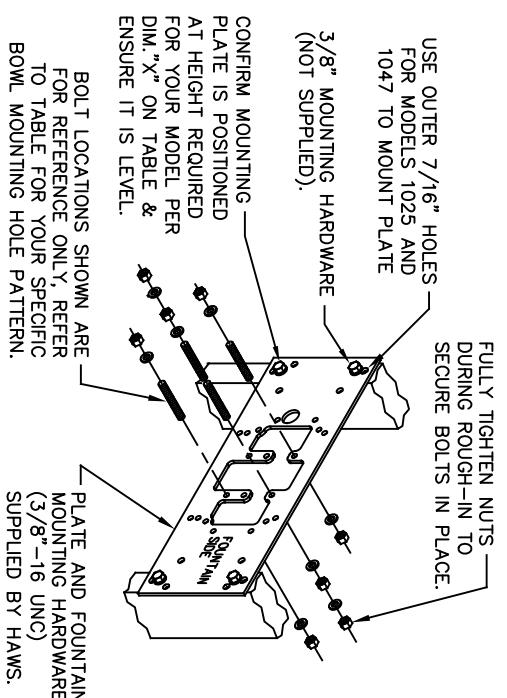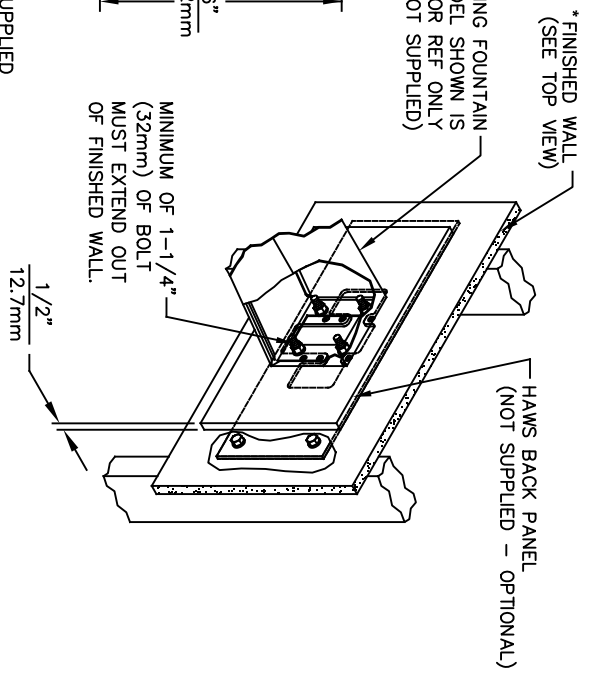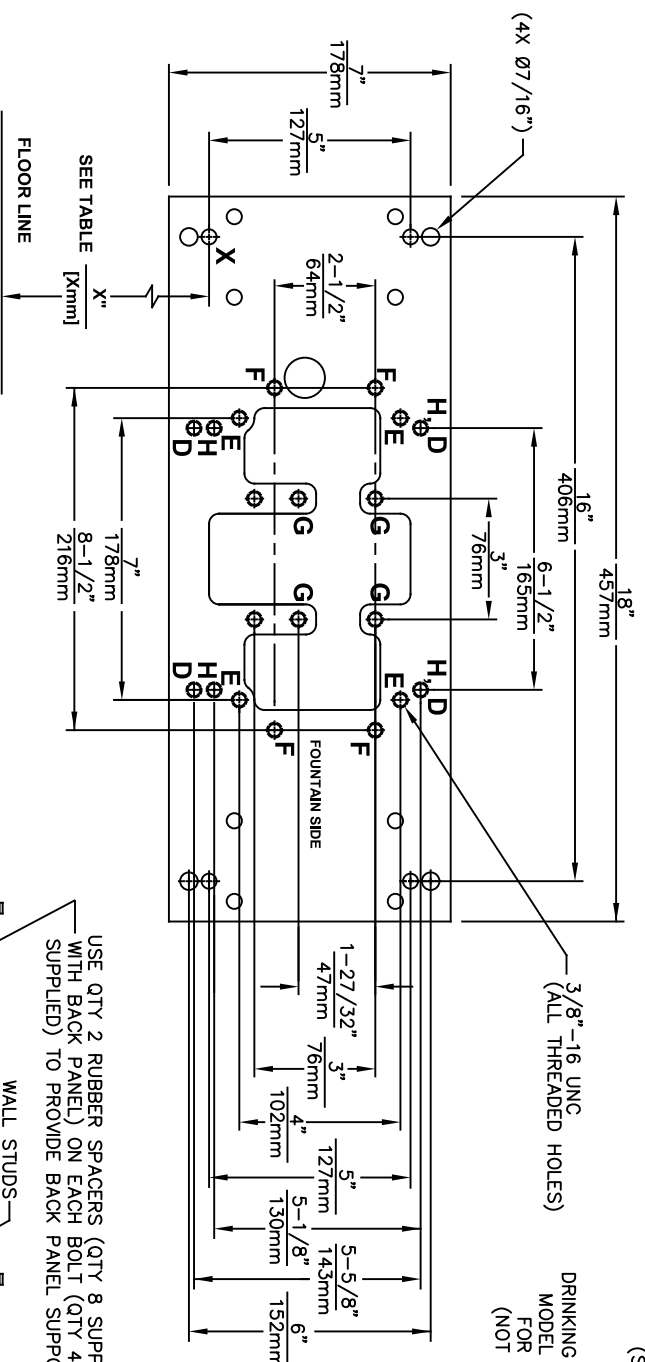

DRINKING FOUNTAIN (ONLY) AT 27" ADULT HEIGHT (SEE SPECIFIC MODEL O&M'S FOR OTHER HEIGHTS)			
MODEL	USE BOWL MTG. HOLE PATTERN	USE "X" DIM. BELOW TO POSITION MOUNTING PLATE HOLE "X"	
1001	"G"	25-3/8" [645mm]	
1025	"D"	28-1/8" [714mm]	
1047	"E"	24-3/8" [619mm]	
1105	"H"	34-5/16" [872mm]	
1107	"F"	26-3/16" [665mm]	
1109	"H"	27-5/16" [694mm]	
1109.14	"H"	27-5/16" [694mm]	
1109FR	"H"	27-5/16" [694mm]	
1311	"E"	26-3/4" [679mm]	
WASTE DRIP TRAY (ONLY) AT 27" ADULT HEIGHT			
6468	"G"	25-3/8" [645mm]	
1922	"G"	25-3/8" [645mm]	

6700 MOUNTING PLATE
FOR USE WITH
DRINKING FOUNTAINS
AND WASTE DRIP TRAYS
AT 27" ADULT HEIGHT
(SEE SHEETS 2 - 5 FOR USE WITH
BOTTLE FILLER 1920/1920HO SERIES
AND CHILD HEIGHT APPLICATIONS)

***FINISH WALL OVER MOUNTING PLATE AND BEHIND BACK PANEL. MAKE SURE THAT FINISHED WALL EXTENDS WITHIN THE BRACKET/BOWL MOUNTING HOLES (TO PROVIDE SURFACE AREA FOR RUBBER SPACERS TO CONTACT).**

CAUTION

REGARDING CONCRETE/MASONRY WALL MOUNTING: DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612



Haws®
Since 1906

ECN NO. REVISED PERBY: 6700
DRAWN: JG
DATE: 09-20-23
CHKD: JG
CUL: JG





MODEL(S)
6700


SCALE: N/A
DRAWING TYPE: INSTALLATION
SIZE: A
SHEET: 2 OF 6

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM



PART NUMBER
0002080016

REVISION
26

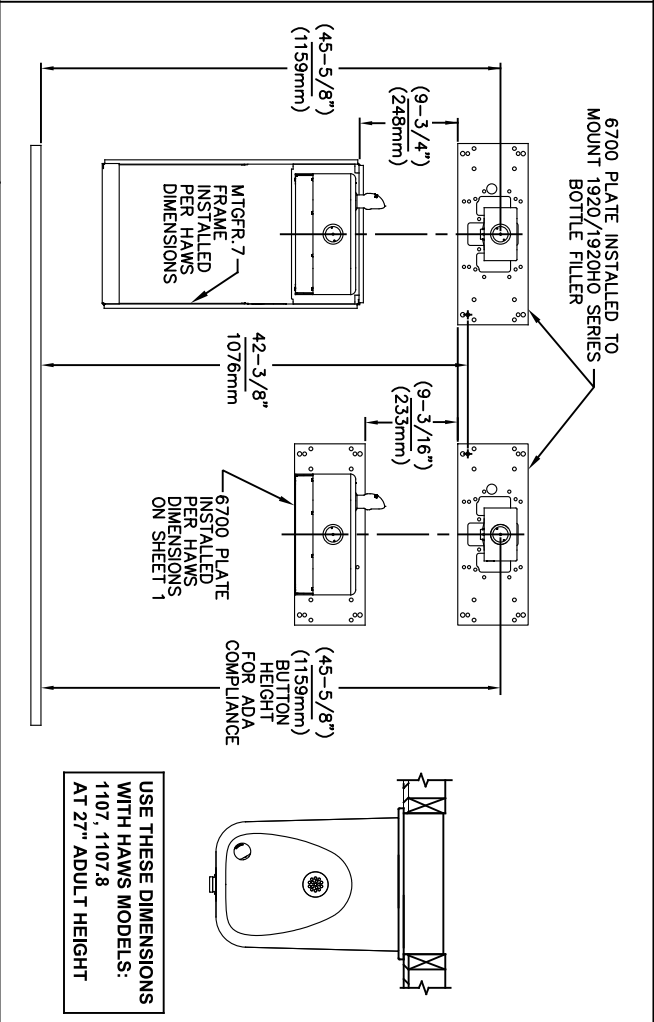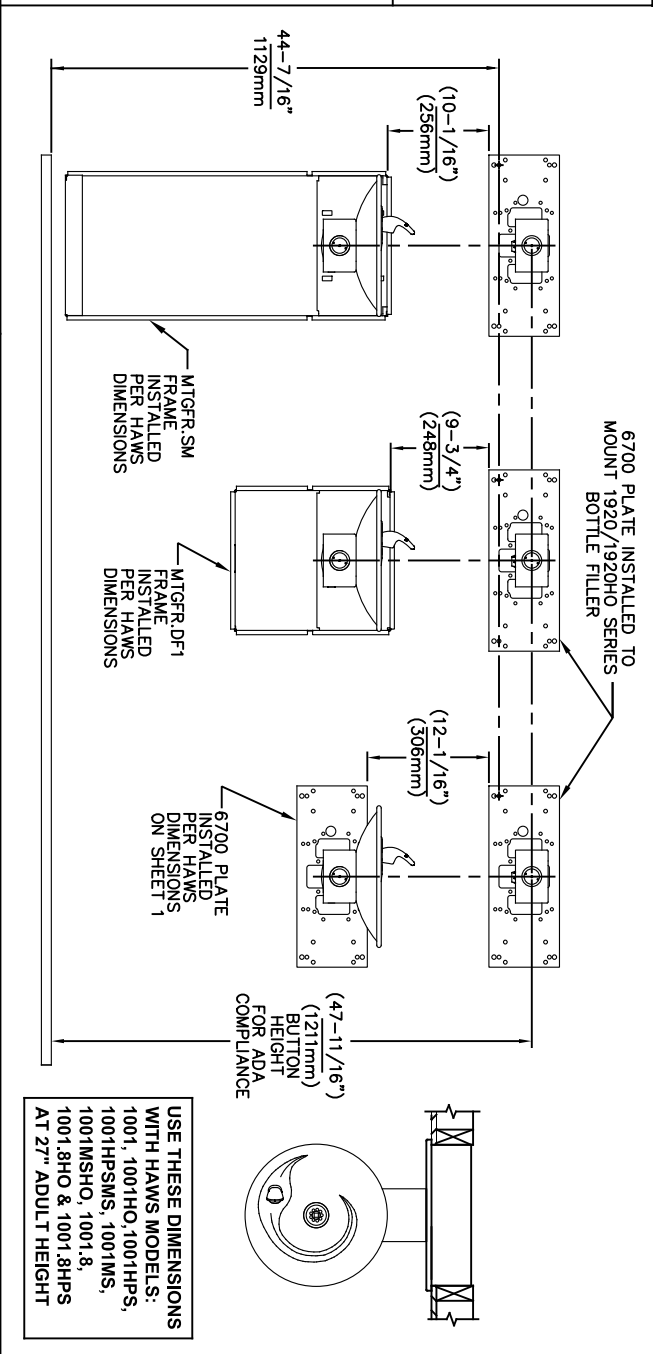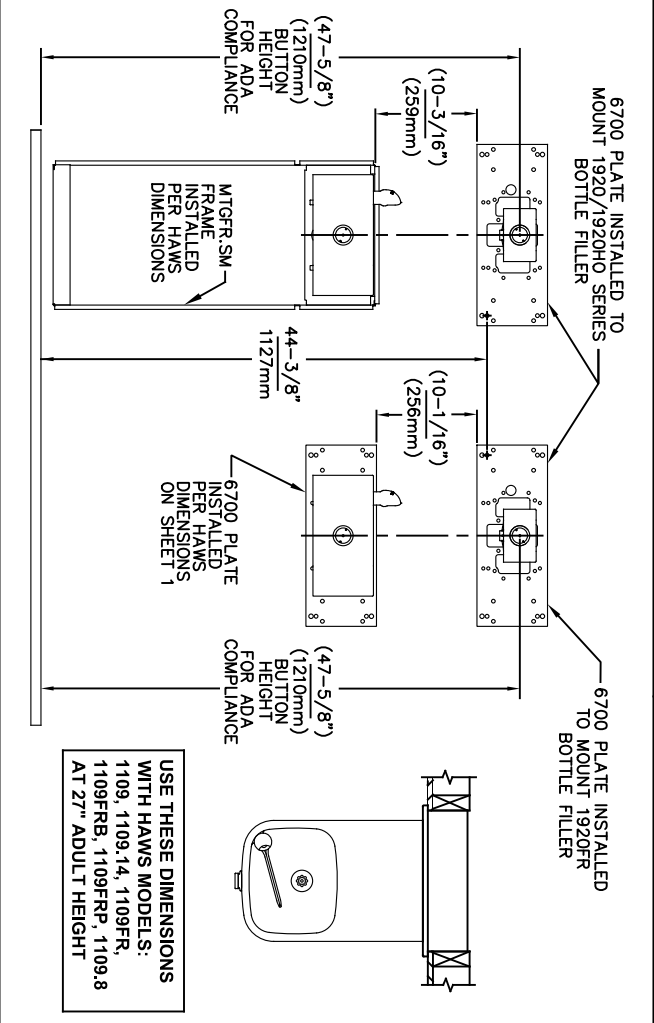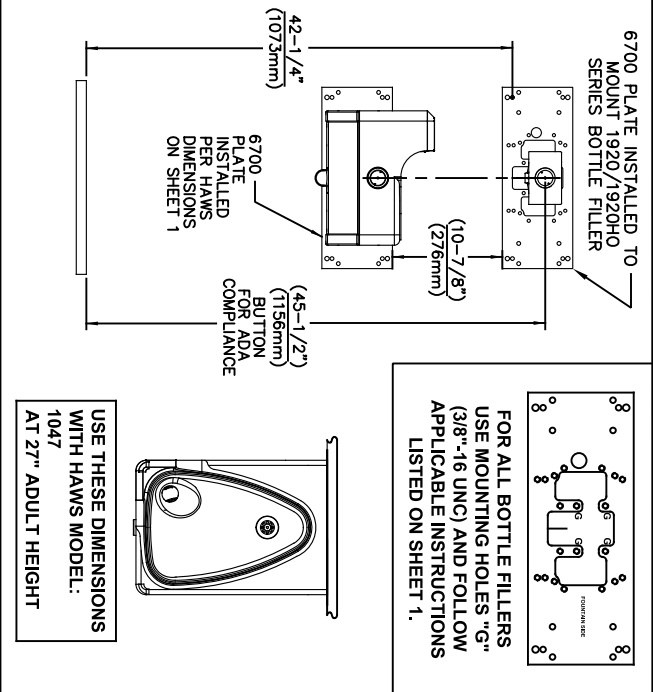


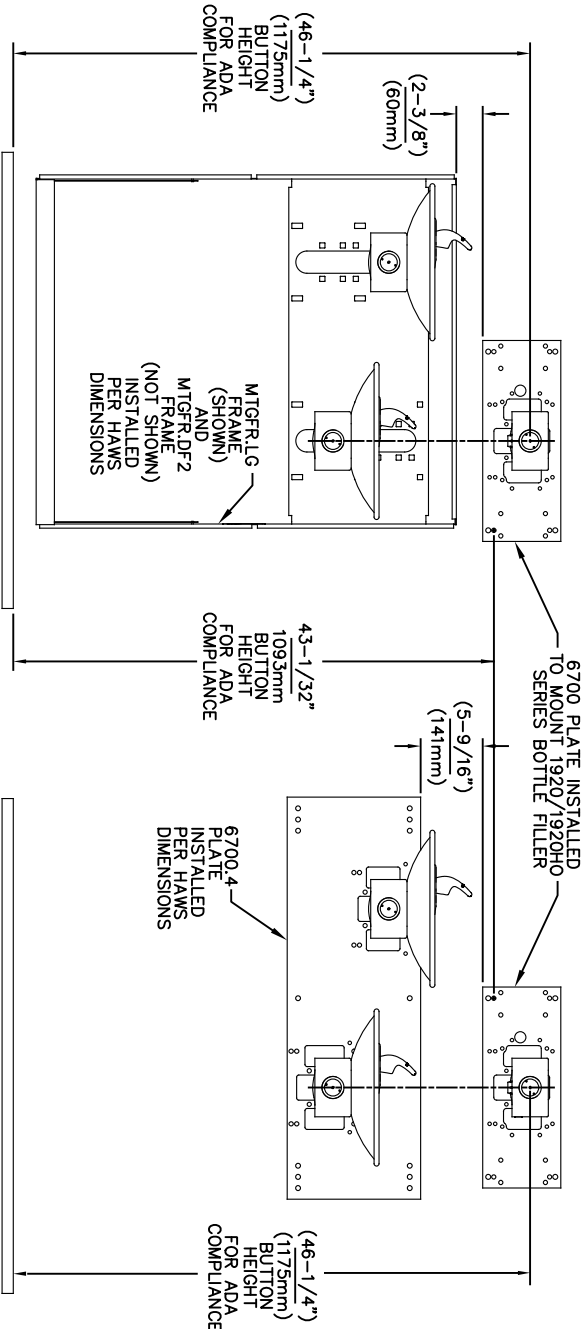

USE THESE MOUNTING DIMENSIONS IF
INSTALLING OVER HAWS FOUNTAIN
MODEL: 1011, 1011HO, 1011HO2,
1011HPS, 1011HPSHO, 1011HPSHO2,
1011HPSMS, 1011HMS, 1011MSHO,
1011MSHO2, 1011.8, 1011.8HO,
1011.8HO2 & 1011.8HPSM
AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE
FOUNTAIN MOUNTING PLATE OR
FRAME AT THE DIMENSION SHOWN
FOR CORRECT BACKPANEL SPACING
BACK PANELS FOR BOTTLE FILLERS
(NOT SUPPLIED - OPTIONAL) ARE NOT
SHOWN FOR CLARITY.

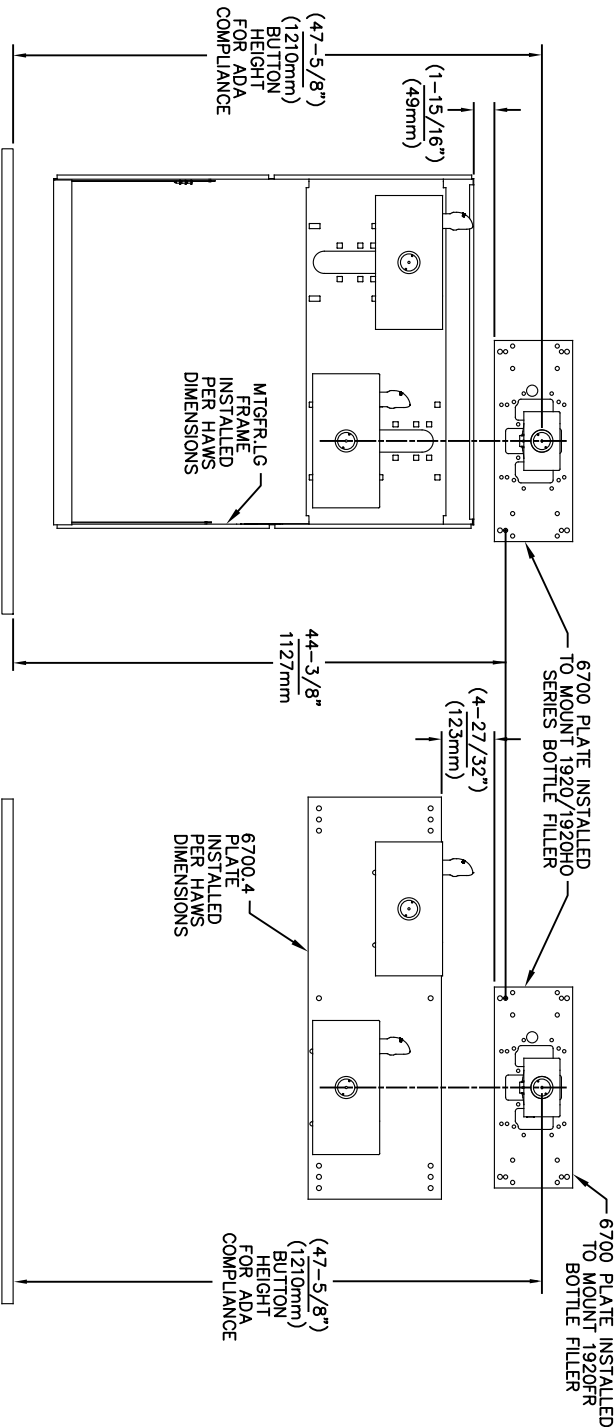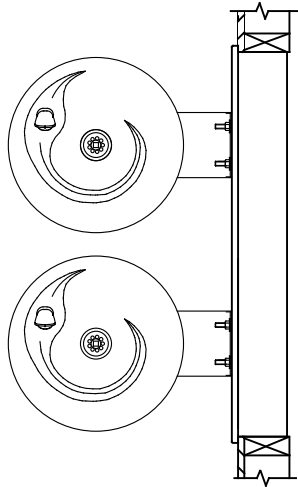

USE THESE MOUNTING DIMENSIONS IF
INSTALLING OVER HAWS FOUNTAIN
MODEL: 1119, 1119.14, 1119.14HO,
1119.14HO2, 1119FR, 1119FRB,
1119FRP, 1119HO, 1119HO2 & 1119.8
AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE
FOUNTAIN MOUNTING PLATE OR
FRAME AT THE DIMENSION SHOWN
FOR CORRECT BACKPANEL SPACING
BACK PANELS FOR BOTTLE FILLERS
(NOT SUPPLIED - OPTIONAL) ARE NOT
SHOWN FOR CLARITY.

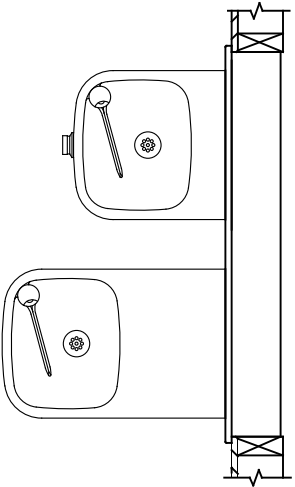

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BACK PANELS (OPTIONAL) NOT SHOWN FOR CLARITY.

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS)

		1456 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
ECN NO. REVISED PERBY:	MODEL(S)	6700	
5550 ECN 6148 JG	DATE: CHKD.	02/11/25	
DRAWN: FV	DATE: JG	02/11/25	
APPROVED: FV	DATE: JG	02/11/25	
SCALE: 1:13	DRAWING TYPE:	INSTALLATION	
SHEET 4 OF 6	REVISION:	26	

6700 PLATE INSTALLED TO MOUNT 1920W/1920WHO BOTTLE FILLER

(10-3/4") (274mm)

1-1/2"

30mm

6700 PLATE INSTALLED PER HAWS DIMENSIONS ON SHEET 1

(47-3/4") (1213mm) BUTTON HEIGHT FOR ADA COMPLIANCE

6700 PLATE INSTALLED TO MOUNT 1920W/1920WHO BOTTLE FILLER

(2-11/16") (68mm)

6715 PLATE INSTALLED PER HAWS DIMENSIONS

42-3/16" (1072mm)


(45-7/16") (1154mm) BUTTON HEIGHT FOR ADA COMPLIANCE

USE THESE MOUNTING DIMENSIONS IF INSTALLING OVER HAWS FOUNTAIN MODEL: 1311, 1501 AT 27" ADULT HEIGHT


INSTALL THE 6700 ABOVE THE FOUNTAIN MOUNTING PLATE AT THE DIMENSION SHOWN FOR CORRECT BACKPANEL SPACING (IF APPLICABLE). BACK PANEL FOR BOTTLE FILLER (NOT SUPPLIED - OPTIONAL) IS NOT SHOWN FOR CLARITY.

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS)


©2025 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.

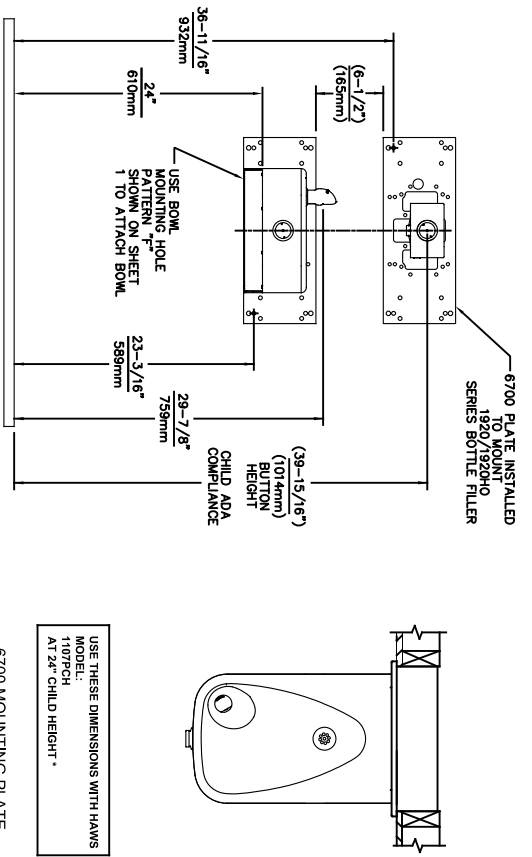


6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER AT
40\" MAX. AND
DRINKING FOUNTAIN
AT 24\" AND BUBBLER HEIGHT AT 30\"
MAX. FOR CHILD ADA HEIGHT
(SEE SHEETS 1 & 2 FOR USE WITH
DRINKING FOUNTAIN AT 27\" ADULT
HEIGHT DIMENSIONS)

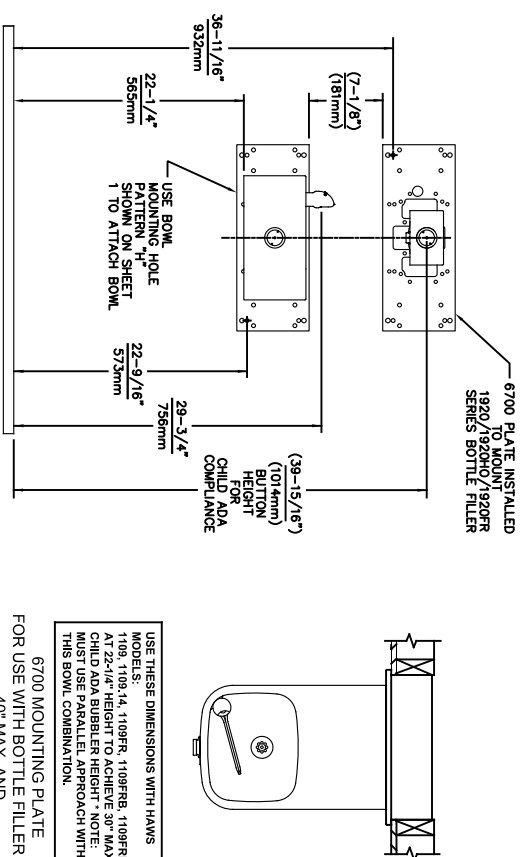

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER AT
40\" MAX. AND
DRINKING FOUNTAIN
BUBBLER HEIGHT AT 30\" MAX.
FOR CHILD ADA HEIGHT
MUST USE PARALLEL APPROACH
WITH THIS BOWL COMBINATION
(SEE SHEETS 1 & 2 FOR USE WITH
DRINKING FOUNTAIN AT 27\" ADULT
HEIGHT DIMENSIONS)

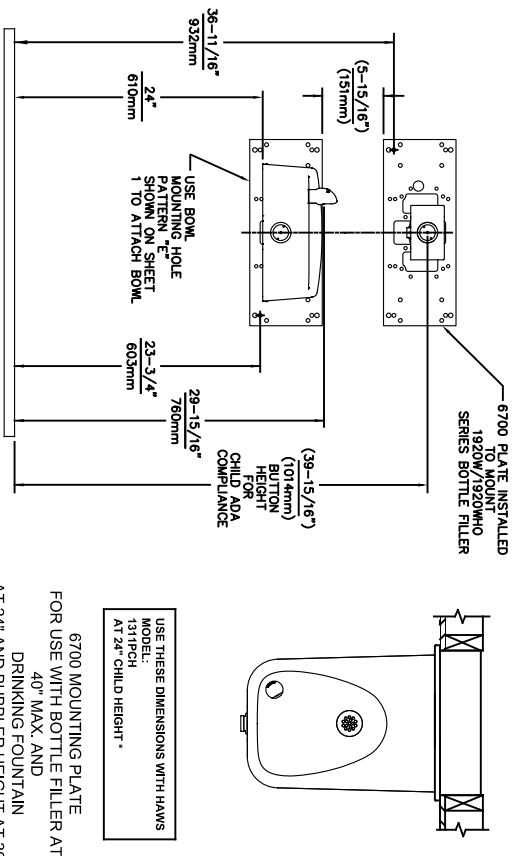

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER AT
40\" MAX. AND
DRINKING FOUNTAIN
AT 24\" AND BUBBLER HEIGHT AT 30\"
MAX. FOR CHILD ADA HEIGHT
(SEE SHEETS 1 & 4 FOR USE WITH
DRINKING FOUNTAIN AT 27\" ADULT
HEIGHT DIMENSIONS)

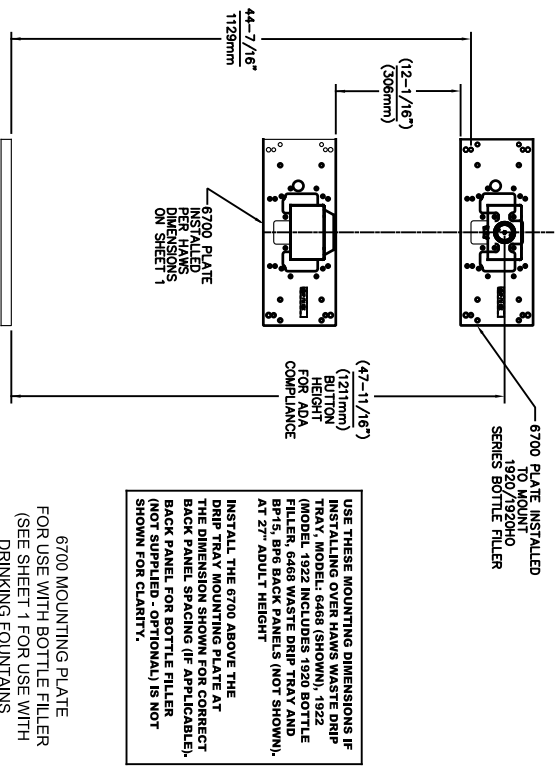


6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS
AND WASTE DRIP TRAY)




1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM


ECN NO. REVISED PERBY:	MODEL(S)
5893 1 ECN 6148 1 JG	6700
DRAWN: DATE: CHKD:	
FV 07/26/23 JG	
APPROVED: DATE:	
FV 02/11/25	
SCALE: 1:13	DRAWING TYPE:
INSTALLATION	SHEET 6 OF 6

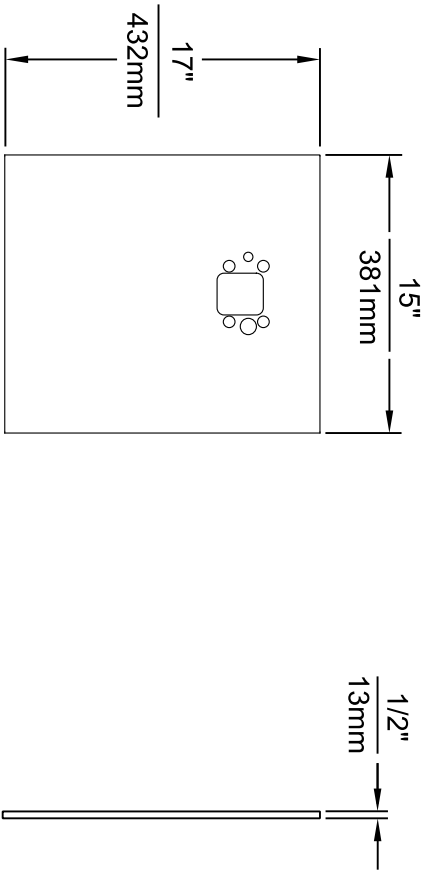

MODEL BP15 / BP15HPS / BP15W

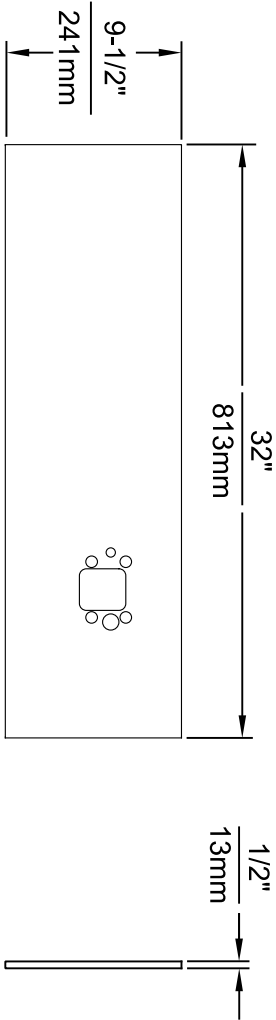

MODEL BP32 / BP32HPS / BP32W

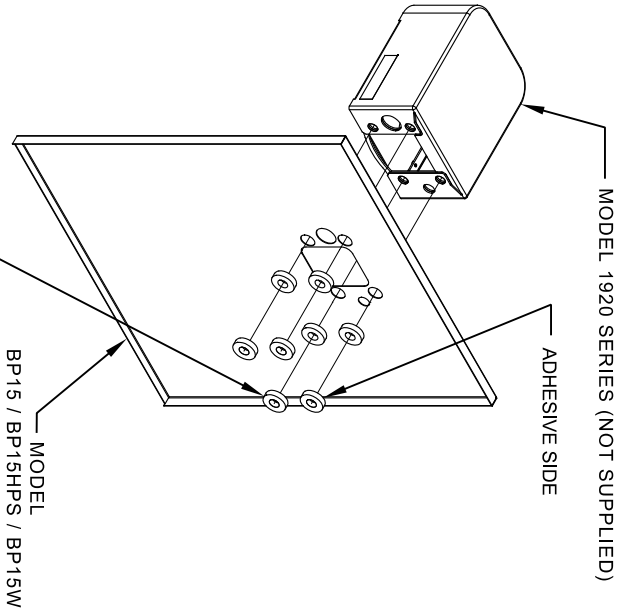


8 SPACERS (2 PER MOUNTING
BOLT IF THE MOUNTING PLATE (MODEL
6700 - NOT SUPPLIED) IS INSTALLED
BEHIND THE FINISHED WALL. USE 1
SPACER PER BOLT FOR RETROFITS
WHERE THE MOUNTING PLATE (MODEL
6700R - NOT SUPPLIED) IS INSTALLED
IN FRONT OF THE FINISHED WALL)

INSTALLATION OVER SINGLE FOUNTAIN

SHOWN FROM REAR

(SEE SHEET 3 OF 3 FOR INSTALLATION OF SPACERS
ON COMBINATION BOTTLE FILLER AND FOUNTAIN
BACK PANELS FOR CHILD HEIGHT APPLICATIONS -
MODELS BP15C & BP15WC)




EQN NO. REVISION PER BY		MODEL(S)		PART NUMBER	
001	EQN 6148	J.G.	DRAWING, BACK PANEL, SPACER INSTALLATION	0510000493	
DRAWN	DATE	CHKD.	FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER	REVISION	
06/27/16	J.G.			6	
APPROVED:	DATE	SCALE:	DRAWING TYPE:	INSTALLATION	SHEET 1 OF 3
F.V.	02/11/25	1:1			

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

STEP 1


1"
25mm

ATTACH SUPPLIED BRACKET TO WALL USING APPROPRIATE FASTENERS. BRACKET IS INSTALLED OVER THE HIGH-SIDE OF THE DRINKING FOUNTAIN

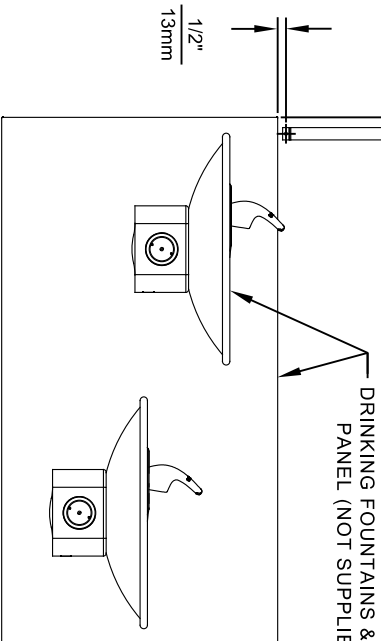

STEP 2

PLACE THE BACKPLATE AGAINST THE WALL AND SLIDE SIDeways SO THE TABS CATCH UNDER THE BRACKET.

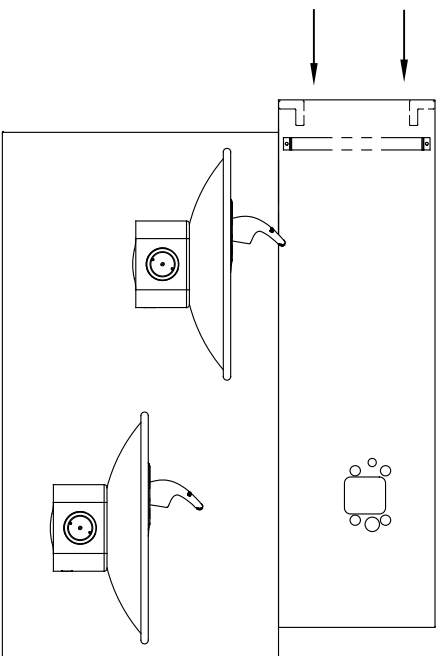


STEP 3

INSTALL THE BOTTLE FILLER (NOT SUPPLIED) PER THE INSTRUCTIONS SUPPLIED WITH THE UNIT.

NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
2. BOTTLE FILLERS, DRINKING FOUNTAINS & DRINKING FOUNTAIN BACK PANELS SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

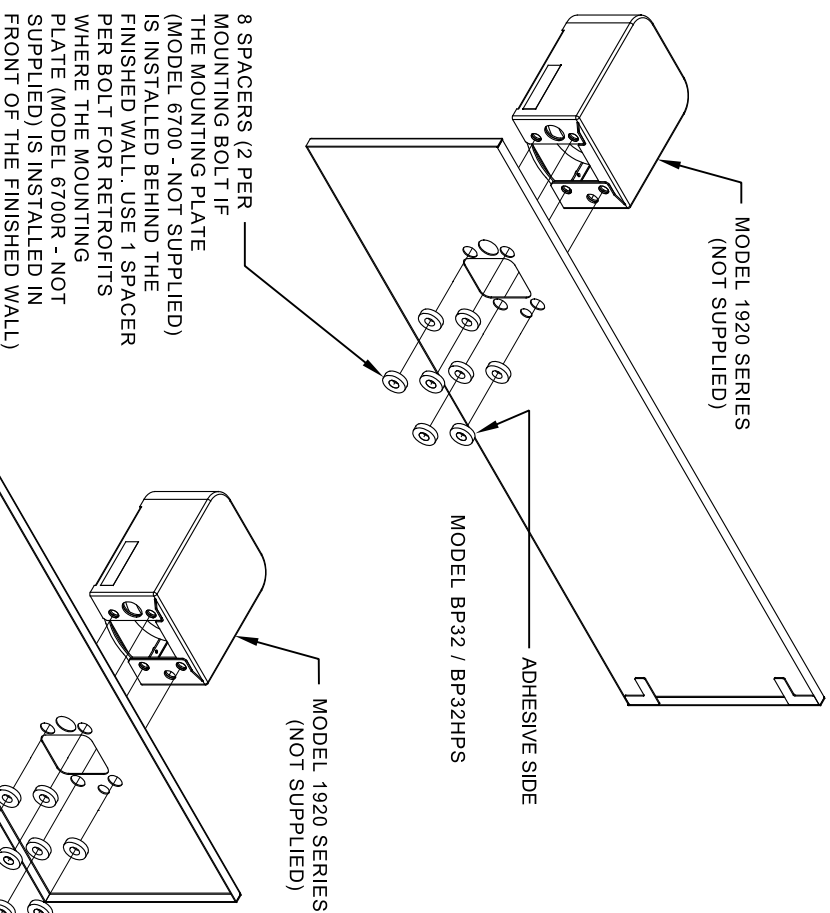

INSTALLATION OVER DOUBLE FOUNTAIN

SHOWN FROM REAR


HAWS

Since 1906


1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HWMS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

MODEL(S)
DRAWING, BACK PANEL, SPACER INSTALLATION
FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER

ECON NO. REUSED PEGBAR:		ECON. 6148		JG	
S081		DATE:		CCHD.	
DRAWN:		DATE:		JG	
MJ		02/20/17		JS	
APPROVED:		DATE:		DATE:	
FV		02/11/25		SCALE: 1:1	
				DRAWING TYPE:	
				INSTALLATION	
				SITE: A	
				SHEET 2 OF 3	
				REVISION 6	
				PART NUMBER 0510000493	

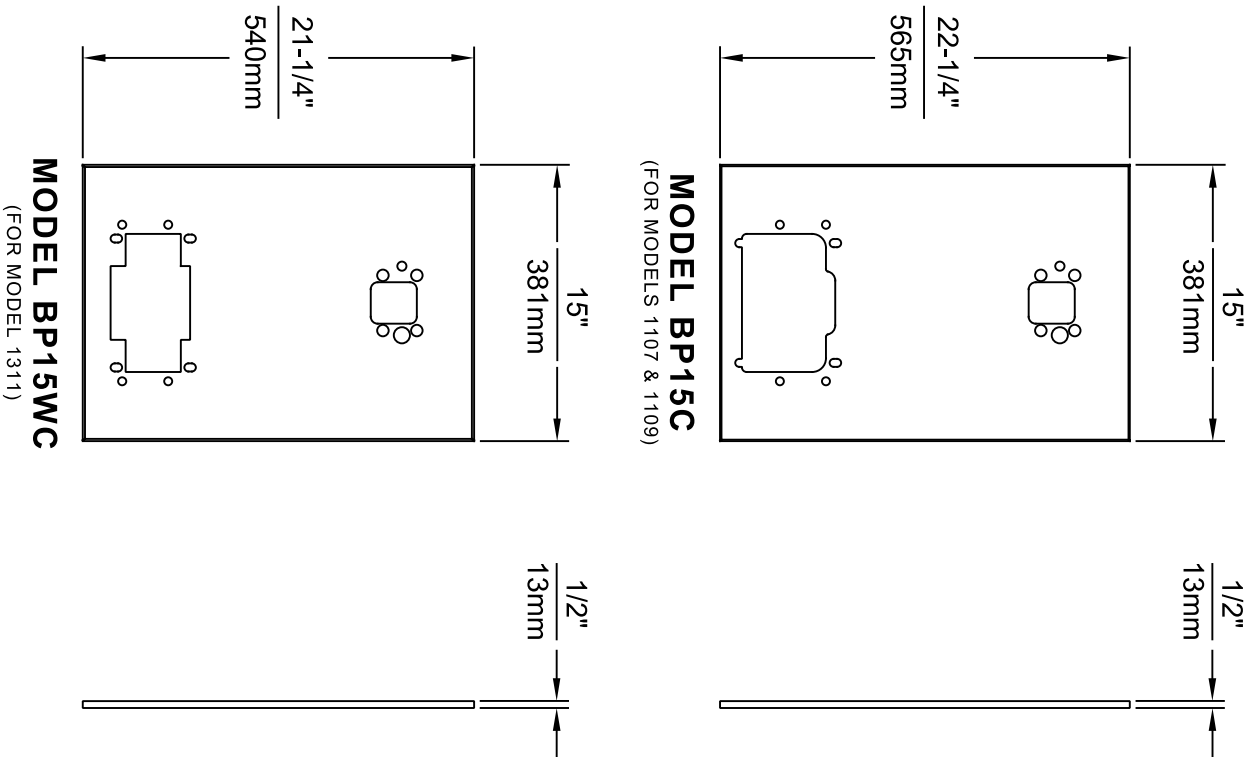

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BOTTLE FILLER AND DRINKING FOUNTAIN SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

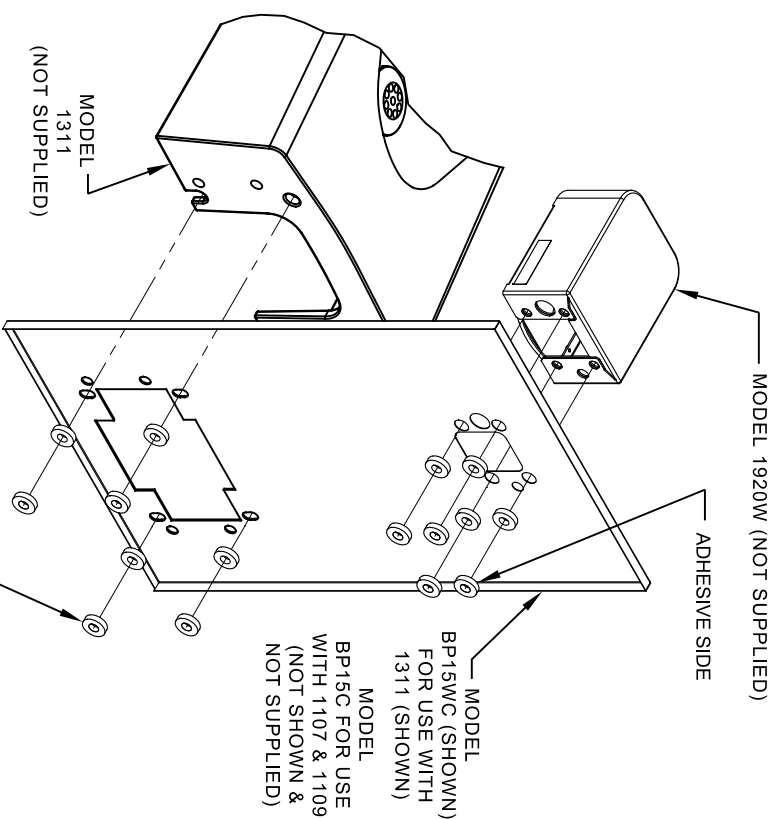

16 SPACERS (2 PER MOUNTING BOLT IF BOTH MOUNTING PLATES (MODEL 6700 - NOT SUPPLIED) ARE INSTALLED BEHIND THE FINISHED WALL. USE 1 SPACER PER BOLT FOR RETROFITS WHERE BOTH MOUNTING PLATES (MODEL 6700R - NOT SUPPLIED) ARE INSTALLED IN FRONT OF THE FINISHED WALL)

ONE PIECE INSTALLATION ON SINGLE FOUNTAIN

SHOWN FROM REAR

(MODEL BP15C & BP15WC ARE COMBINATION BOTTLE FILLER AND FOUNTAIN BACK PANELS USED FOR CHILD HEIGHT APPLICATIONS ONLY ON MODELS 1107, 1109 & 1311 - BOTTLE FILLER & DRINKING FOUNTAIN NOT SUPPLIED)

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
EQUIPMENT NO. 6148		MODEL(S)	
SIZE 10/15/20		DRAWING, BACK PANEL, SPACER INSTALLATION	
DATE 02/11/25		FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER	
APPROVED: FV		SCALE: 1:1	
DATE 02/11/25		INSTALLATION	
FV		SIZE A	
		SHEET 3 OF 3	