



model 6518FR

Freeze Resistant Bury Valve For Single Fountain

FEATURES & BENEFITS

YEAR-ROUND SERVICE

Reliable and fully engineered system allows the pneumatic valve to be installed below the frost line, and equipped with the ability to drain the water line after use to non-freezing depths so the unit can be used year round.

SERVICEABILITY

Operation and maintenance ease is achieved through both the adjustable stream regulation and the ability of the valve assembly to be lifted to the surface and lowered back into the casing, so in the rare event that maintenance is required, can be done without having to disturb the fountain.

OPTIONS

For more information, visit www.hawscos.com or call (888) 640-4297.



SPECIFICATIONS


Model 6518FR freeze-resistant bury valve for use with single bubbler head pedestal fountains shall include a brass pneumatic operated valve installed below the frost line, check valve to drain water from unit when not in use and to prevent back-flow cross contamination, regulator valve to control stream height, separate valve access and pull-out design for easy maintenance, 6" (15.2 cm) diameter PVC pipe to encase valve assembly, and 1/2" NPT supply.

(Consult with the local authority having jurisdiction before installation in order to determine if any additional regulations or requirements may apply)

APPLICATIONS

Freeze-resistant valve system is used in all Haws single bubbler, freeze-resistant, pedestal mounted fountains. Because this valve is installed below the frost line, it allows the fountain it is installed with to function year round in freezing conditions. Responsible for this non-freezing feat is a pneumatic operated valve that drains the water from the fountain to non-freezing depths. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61- Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: Q ≤ 0.5.




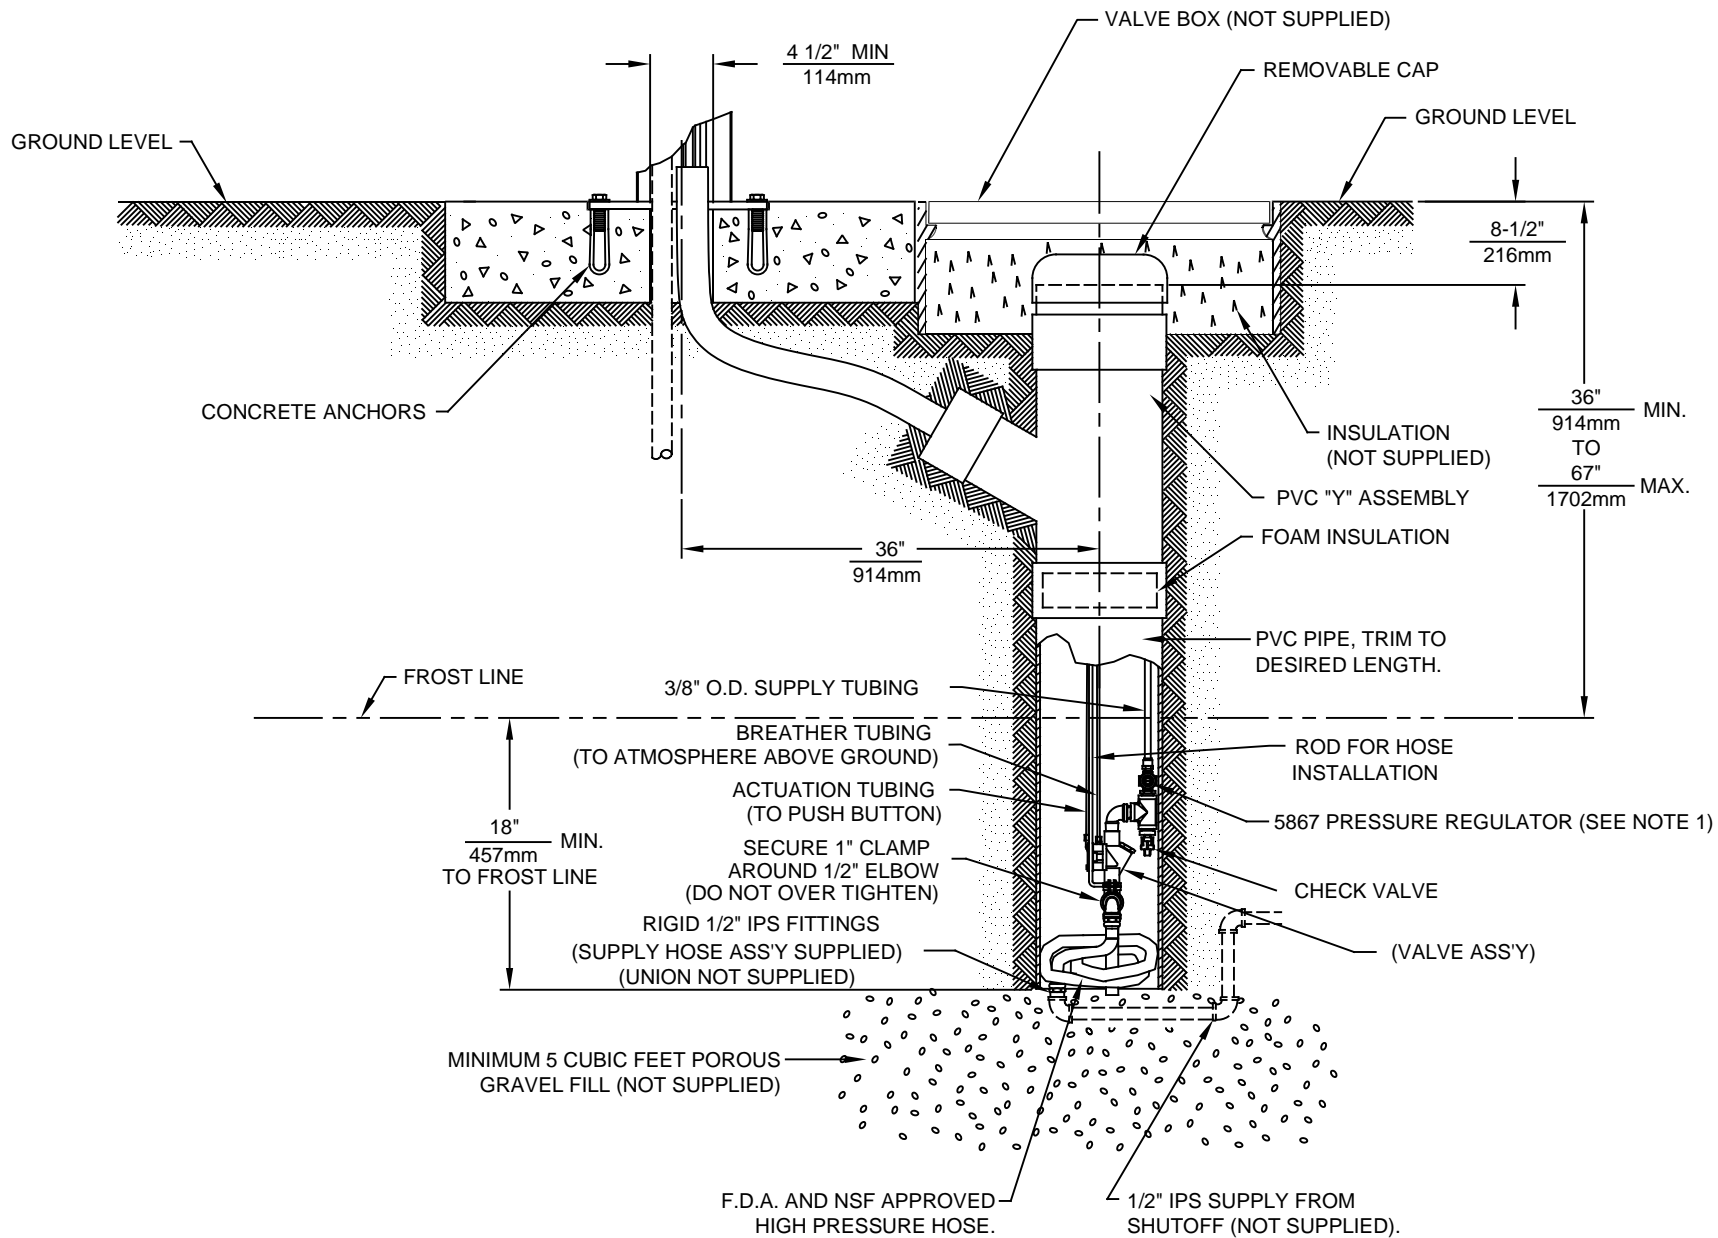



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER	BY:	MODEL(S)		PART NUMBER
	ECN: 5362	FV			0002077777.D
DRAWN:	DATE:	CHK'D:	6518FR		REVISION
TRF	12/90	JP	VALVE, FREEZE RESISTANT, SINGLE		22
APPROVED:	DATE:		SCALE: 1:13	DRAWING TYPE: INSTALLATION	SIZE: A SHEET 1 OF 3
MJ	10/23/18				

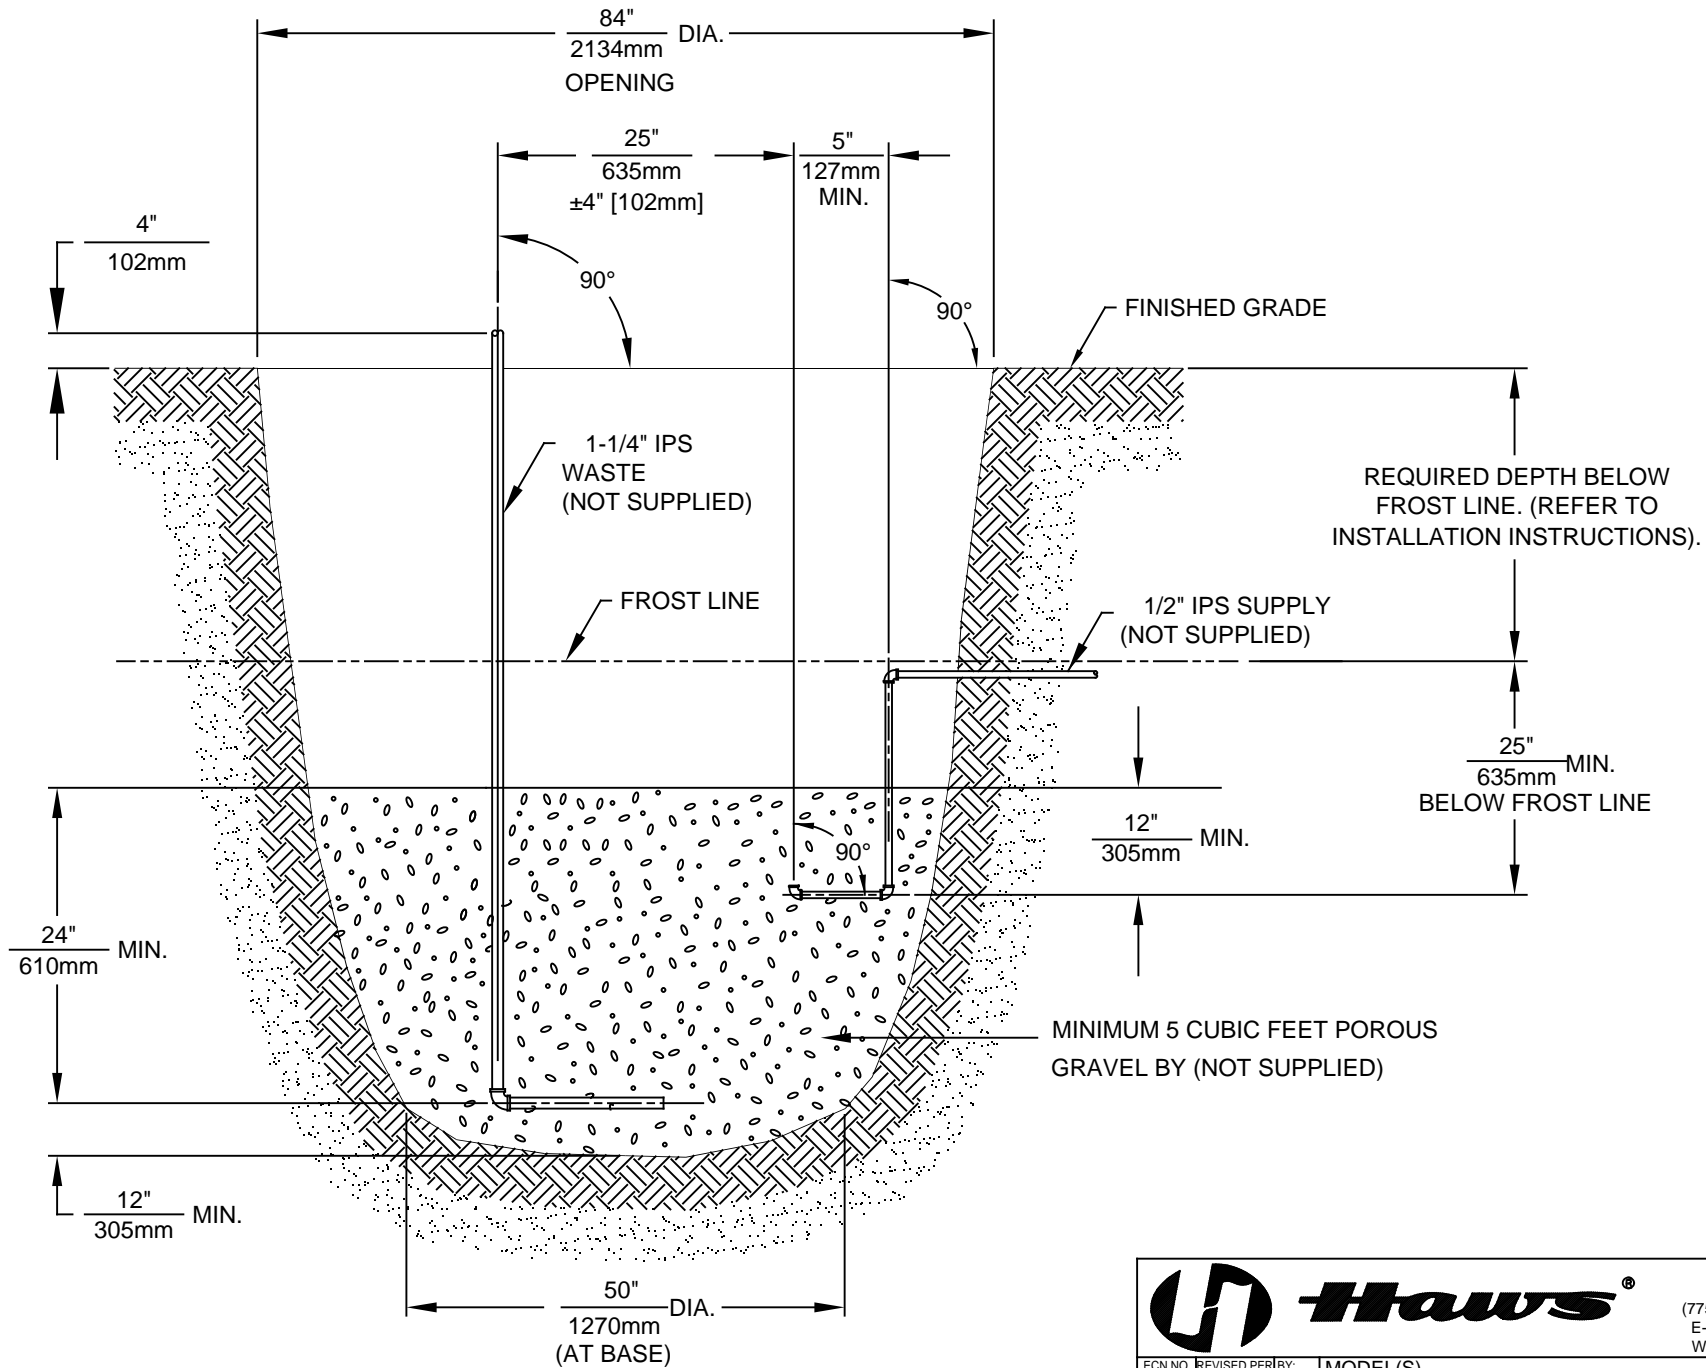




Haws[®]

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER	BY:	MODEL(S)		PART NUMBER
	ECN: 5362	FV			0002077777.D
DRAWN:	DATE:	CHKD.:	6518FR VALVE, FREEZE RESISTANT, SINGLE		REVISION
TRF	12/90	JP			22
APPROVED:	DATE:	SCALE:	DRAWING TYPE:	INSTALLATION	SHEET 2 OF 3
MJ	10/23/18	1:23			

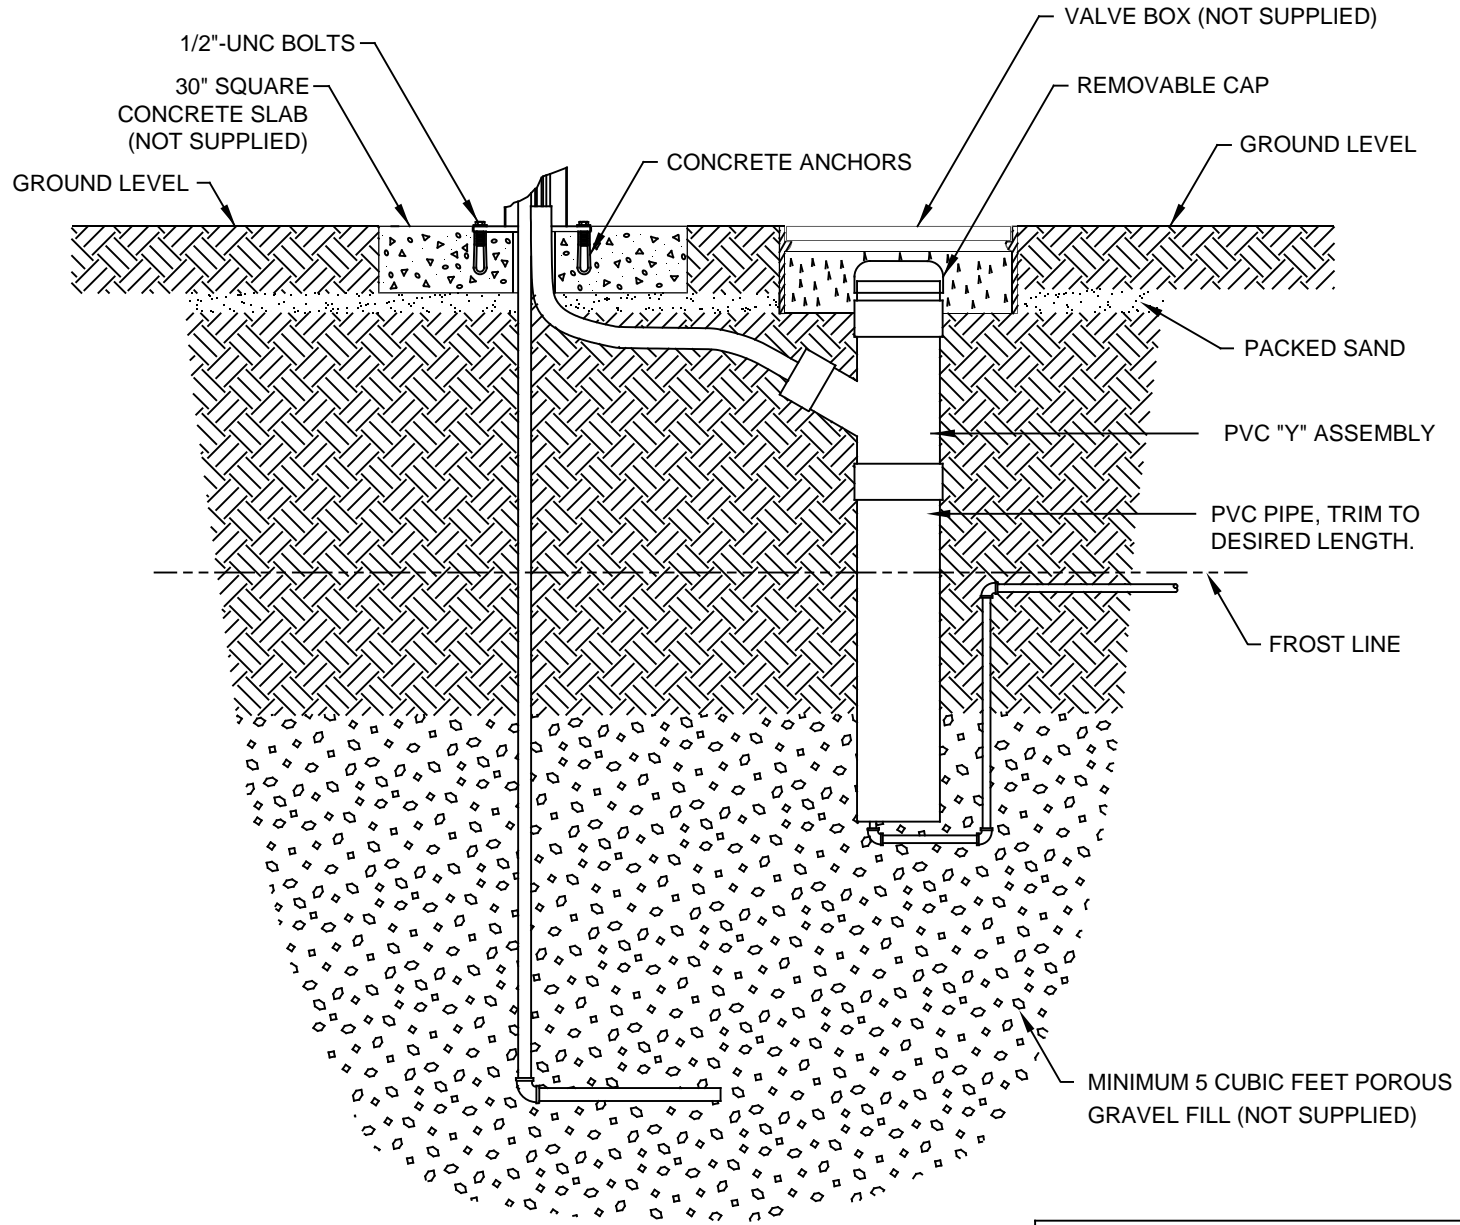

		Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
				ECN NO. REVISED PER BY: MODEL(S) ECN: 5362 FV	
DRAWN: TRF	DATE: 12/90	CHK'D: JP	6518FR		PART NUMBER 000207777.D
APPROVED: MJ	DATE: 10/23/18	SCALE: 1:23	VALVE, FREEZE RESISTANT, SINGLE		REVISION 22
DRAWING TYPE: ENVIRONMENT		SIZE: A	SHEET 3 OF 3		