

FEATURES & BENEFITS

MOUNTING

Heavy duty 3/16" (.47 cm) steel pre-drilled and threaded in-wall mounting plate along with all-thread studs and hardware

OPTIONS

Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.

For more information, visit www.hawscos.com or call (888) 640-4297.




SPECIFICATIONS

Model 6710 in-wall 3/16" thick steel pre-drilled plate is larger, thicker and stronger than any other plate in the industry, and shall include the all-thread studs, nuts, and washers.


APPLICATIONS

Haws produces mounting plates and frames to assist in the installation process as well as to provide solid bases for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.

* THESE DIMENSIONS ARE FOR STANDARD UNITS. FOR FREEZE RESISTANT FOUNTAINS PLEASE REFER TO THE INSTRUCTIONS SUPPLIED WITH THE UNIT.

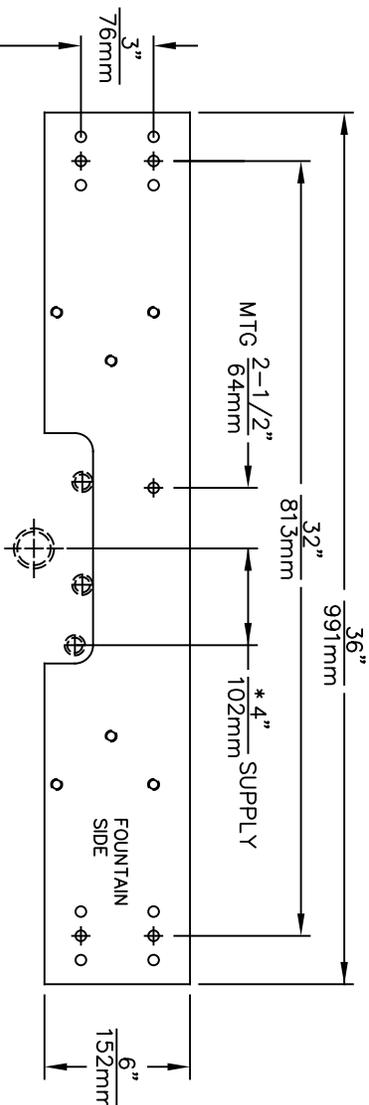


DIMENSION	1441FR	1441
"X"	28-1/2" [724mm]	28-1/2" [724mm]
SUPPLY	28-9/16" [725mm]	27-1/2" [699mm]
WASTE	26-9/16" [675mm]	26-1/4" [667mm]

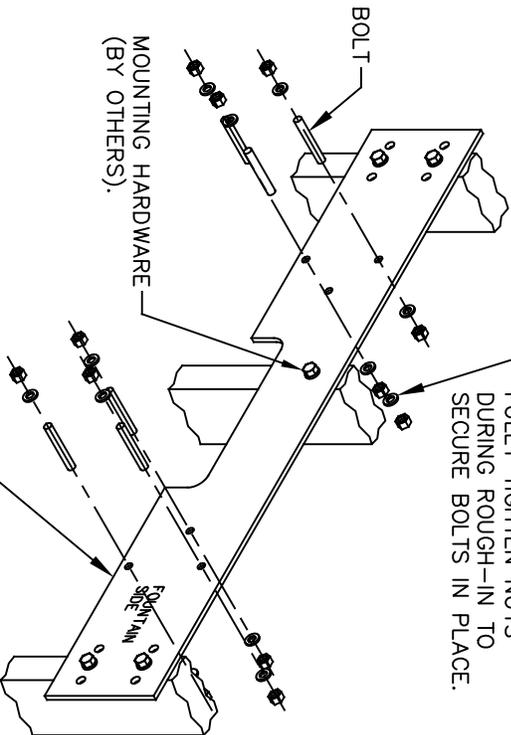

CAUTION

REGARDING CONCRETE/MASONRY WALL MOUNTING:
DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612

MINIMUM OF 1-1/4" (32mm) OF BOLT MUST EXTEND OUT OF FINISHED WALL.

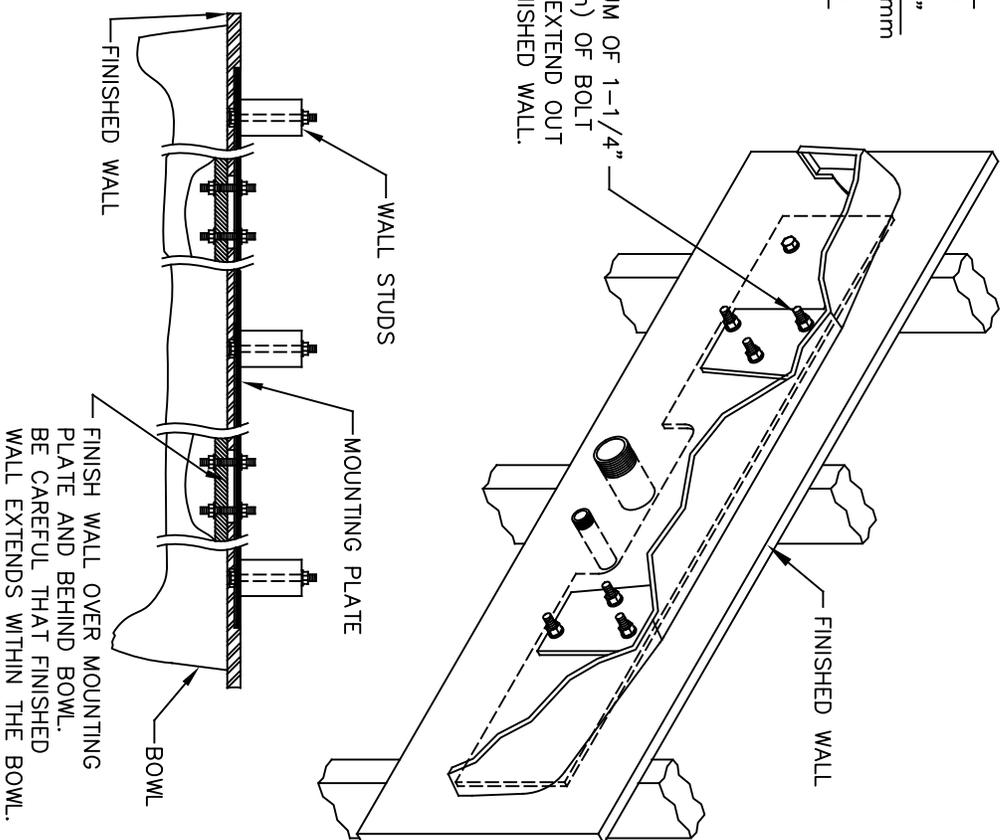

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 399-4712 FAX (775) 399-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECON. REVISED PER BY:	MODEL(S)	PART NUMBER	REVISION
ECON. 5526 FV		0002080017	
DRAWN: CH	DATE: 06-93	CHKD: DP	
APPROVED: FV	DATE: 04/13/20	SCALE: N/A	DRAWING TYPE: INSTALLATION
		SIZE: A	SHEET 1 OF 1

6710