



OUTDOOR BOTTLE FILLER WITH SINGLE DRINKING FOUNTAIN,
MANUAL, NON-REFRIGERATED

MODEL DGM-BC-F-GRN-US

Suggested Specification

Model DGM-BC-F-GRN-US is a non-refrigerated bottle filler and drinking fountain that delivers ambient water serving 2 station(s), heavy duty and vandal resistant in design. Shall include a bottle filler with manual push button activation and laminar flow and fountain shall have a single vandal resistant push button to activate the manual flow of water. Vandal Resistant water saver bubbler to reduce waste water by 50% and operate between 20 and 100 PSI. One-piece vandal resistant metal bubbler keyed into place to prevent vandalism. Cabinet finish shall be powder coat forest green on marine grade stainless steel. 1-1/4" NPSL connection for drainage, drain not included. Shall comply with ADA when properly installed. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Features:	• Built-in 100 micron strainer stops particles before they enter the waterway
	• Waterways are lead-free in materials & construction
	• Vandal resistant metal water saver bubbler
	• 2.5mm marine grade 316 stainless steel
	• Corrosion and vandal resistant cabinetry
	• Mechanical activation

Filtration	Option to add filtration*
Power:	No electricity required
Activation By:	Independent Manual Activation on Bottle Filler and Fountain
Mounting Type:	Freestanding/Floor Mount
Chilling Option:	Non-Refrigerated
Full Load Amps	0 amps
Rated Watts	0
Dimensions	63" (H) x 28" (W) x 14" (Base Diameter)
Alcove Height	15 inches
Approx. Net Weight	94.8 lbs
Installation Location:	Outdoor
No. of Stations Served:	2

When used or stored in non-temperature controlled environments, the unit must be adequately winterized and/or protected from extreme heat to prevent damage.

*Ensure filters are certified for outdoor use.



Ships in multiple boxes.

Installation

- Shipped with complete instructions and mounting plate
- Outdoor anchor assembly is recommended (at additional cost)
- Removable back panel provide easy access for installation

Finishes

- Forest Green powder coat on marine grade stainless steel

Limited 1-Year Warranty

(Continental limits of the United States and Canada)

One year on bottle fillers and electrical components. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

MODEL: _____ QTY: _____

PROJECT: _____

CONTACT: _____

NOTES: _____

APPROVAL: _____ DATE: _____



WARNING:

Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Specifications subject to change without notice



OUTDOOR BOTTLE FILLER WITH SINGLE DRINKING FOUNTAIN,
MANUAL, NON-REFRIGERATED

MODEL DGM-BC-F-GRN-US

Accessories



OASIS Outdoor Universal Filter Kit

OASIS Item #041253-008

- Add filtration to your unit - certified to NSF/ANSI 42, 53 and 401 for lead, cysts, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons.



Outdoor Bottle Filler Ground Anchor Assembly

OASIS Item #043911P001

- The outdoor anchor assembly is a recommended accessory to secure your OASIS freestanding outdoor bottle filler models



[View all filters and accessories](#)




OUTDOOR BOTTLE FILLER WITH SINGLE DRINKING FOUNTAIN,
MANUAL, NON-REFRIGERATED
MODEL DGM-BC-F-GRN-US

NOTES:


1. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
2. APPROXIMATE WEIGHT 43 kg (95 lb) + PET BOWL 7 kg (15,4 lb)
3. ARM CAN BE INSTALLED ON LEFT OR RIGHT SIDE.
4. ARMS ON BOTH SIDES CAN BE INSTALLED IN LOWER OR UPPER POSITIONS:

	DIM "A"	DIM "B"	DIM "C"
LOWER	22.15 [563]	29.53 [750]	25.12 [638]
UPPER	27.26 [693]	34.65 [880]	30.24 [768]

5. THE WATER SUPPLY FOR THE PET BOWL MUST BE SAFELY PROTECTED AGAINST BACKFLOW. WATER MUST COME EITHER THROUGH AND APPROVED BACKFLOW DEVICE OR FROM PROTECTED STORAGE TANK AND THE SUPPLY PIPE MUST ONLY BE USED FOR THIS UNIT.

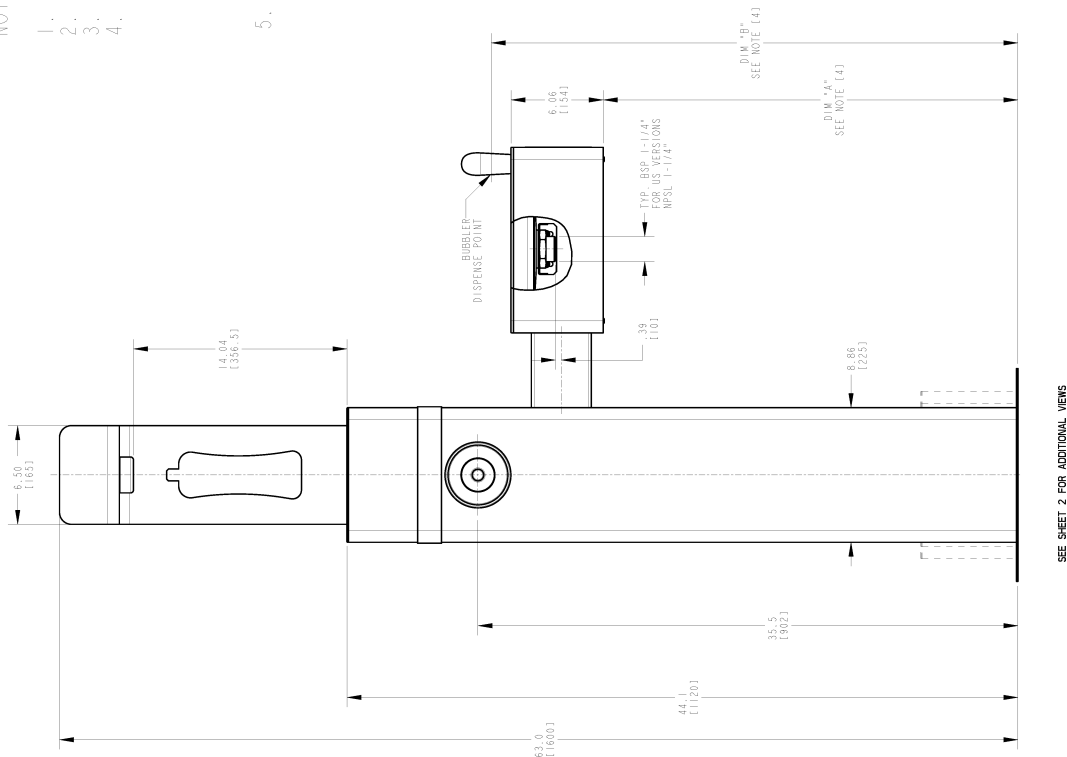

SEE SHEET 2 FOR ADDITIONAL VIEWS

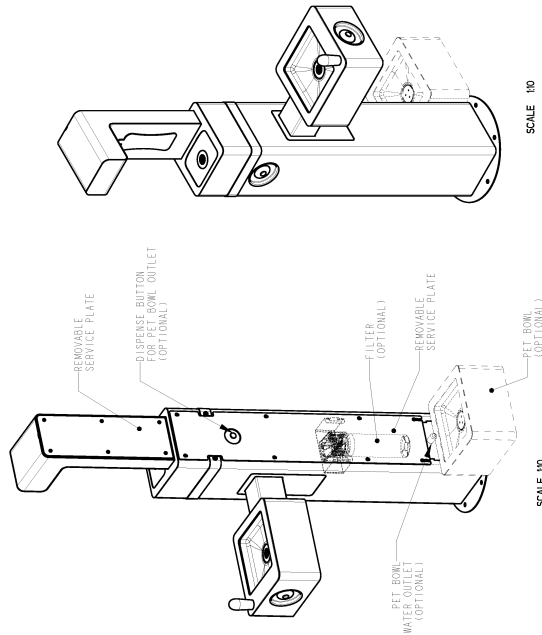



OUTDOOR BOTTLE FILLER WITH SINGLE DRINKING FOUNTAIN,
MANUAL, NON-REFRIGERATED

MODEL DGM-BC-F-GRN-US

NOTES:

6. RECOMMENDED MINIMUM DISTANCE FROM TO THE WALL FOR EASE OF ACCESS:
WITH PET BOWL - 15,7" [400]
WITHOUT PET BOWL - 11,8" [300]

