



RADII™ MODULAR FOUNTAIN M8WR

Suggested Specification

Model M8WR shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Shall include antimicrobial copper push button to activate the flow of water and a low flow one piece bubbler with flexible guard. The fountains shall be designed to eliminate splashing and standing water. Water saver bubbler reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Radii modular bi-level water cooler meets the needs of the physically challenged and the able-bodied.

Models

M8WR: A light press of the push pad activates the water flow when the user approaches. Fountain has a manually operated copper button that requires no electricity to activate.

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- One antimicrobial push button
- Waterways are Lead-Free in materials & construction
- Flexible bubbler guard
- Brushed stainless steel finish
- High efficiency cooling system

Finishes

- Standard cabinet finish: Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Recessed mounting frame included, but water supply and drain required



Options (at additional cost)

- Vandal resistant screw kit (036704-002)
- One piece chrome plated brass bubbler (036700-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot°N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8WR	8.0	8.0	No	No	1/4	4.8	500	No	Yes	132 Lbs

* Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS RADII™ BI-LEVEL MODULAR MODEL M8WR

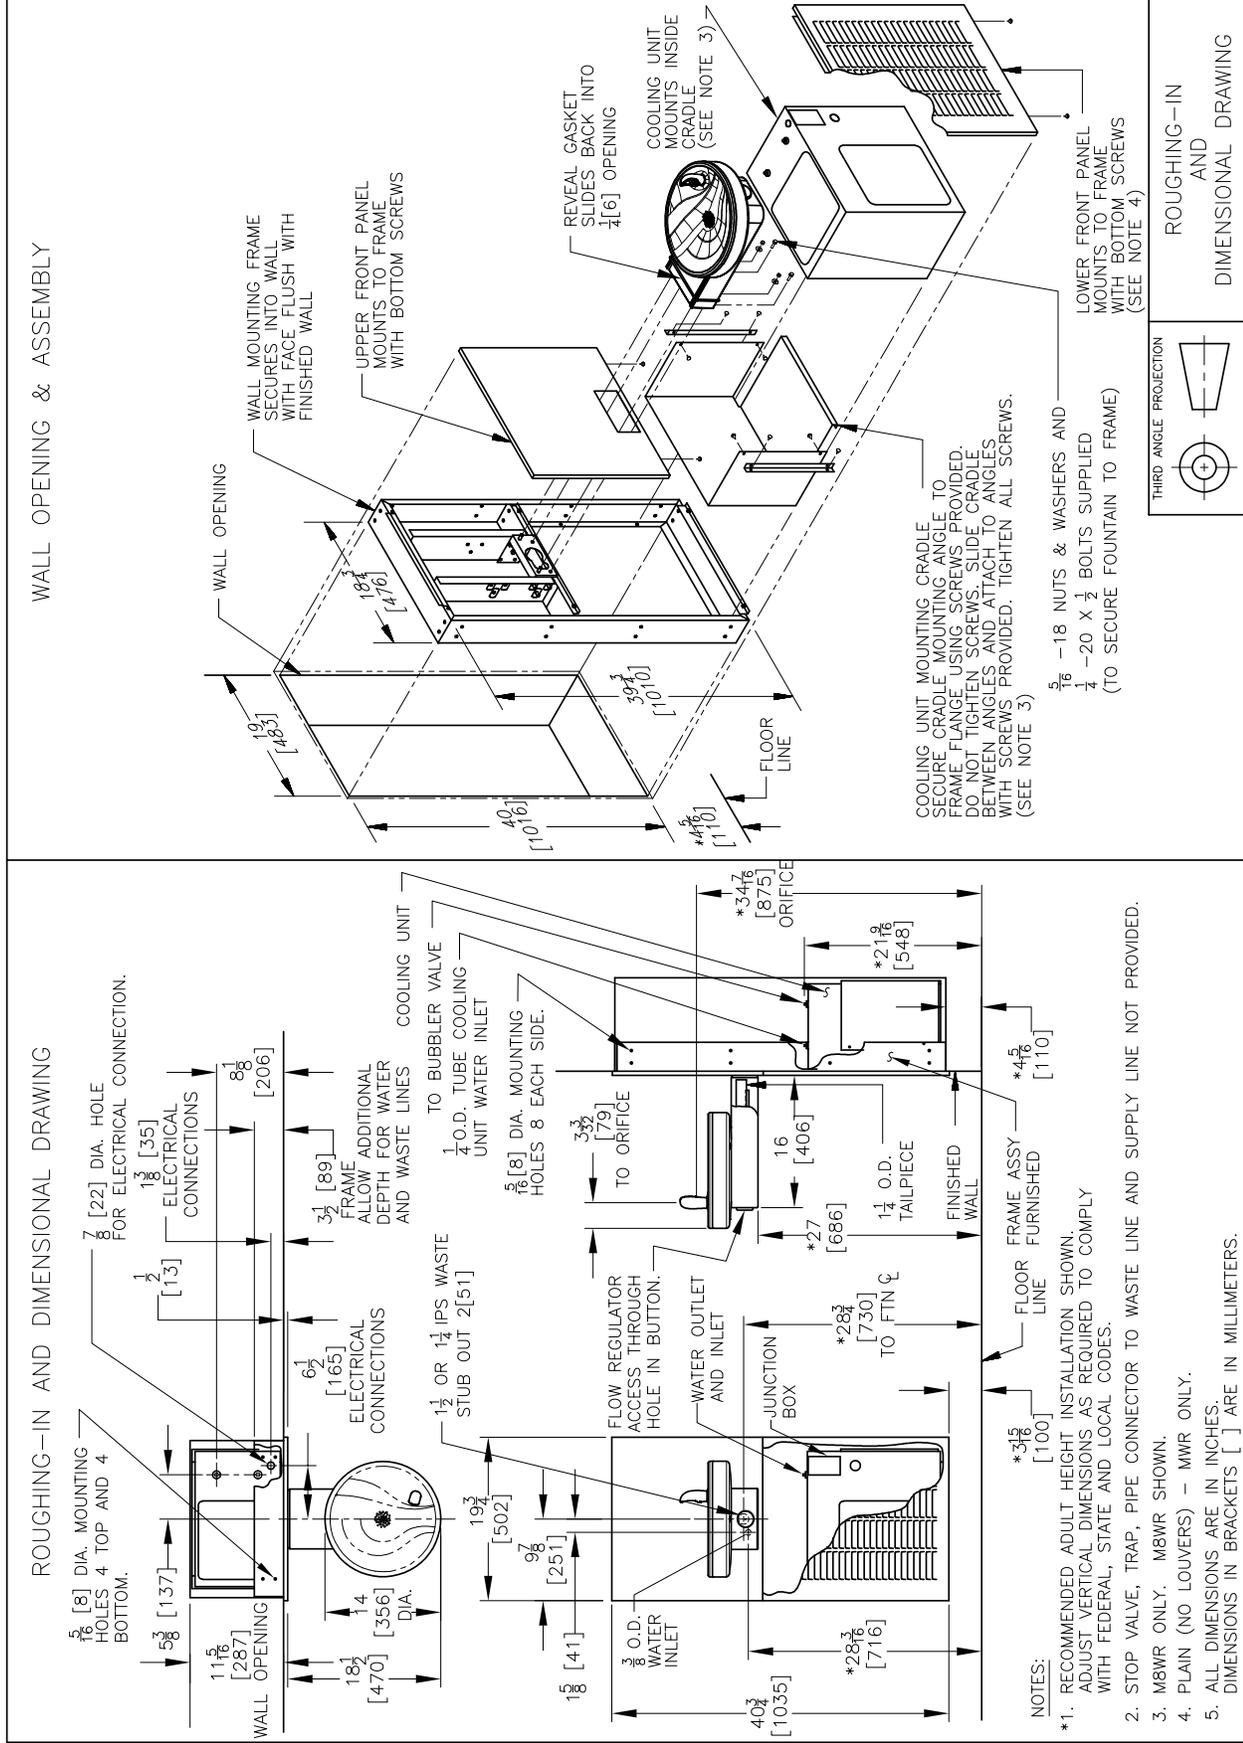

Oasis International, 222 East Campus View Blvd., Columbus, OH 43235
 For customer service and technical help line assistance call: 800.950.3226



www.oasiscoolers.com

Oasis, VersaCooler, Freshfield and VersaFilter are registered trademarks of LYD Acquisition, LLC dba Oasis International. © 2017 LYD Acquisition