



**TOUCH-FREE, BI-LEVEL VERSACOOLER® II W/ HANDS-FREE BOTTLE FILLER**

**Energy and Water Conservation Technology  
PG8EBFSLTM, PGEBFSLTM**

**Suggested Specification**

Model PG8EBFSLTM shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PGEBFSLTM is a non-refrigerated drinking fountain and delivers ambient water. Both shall include the VersaFiller Sports Bottle Filler with hands free activation; lower unit shall have infrared sensor to activate the flow of water for the cooler. Another unit must have four antimicrobial copper push pads. Hands-free VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduces waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be sandstone on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

**Models**

- PG8EBFSLTM delivers 8.0 gallons of chilled drinking water per hour.
- PGEBFSLTM is a non-refrigerated fountain.

**Standard Features**

- Universal design allows universal installation
- Infrared sensor activation
- Built-in 100 micron strainer stops particles before they enter the waterway.
- Waterways are Lead-Free in materials & construction
- Flexible and one-piece antimicrobial water saver bubbler guard
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system
- Four antimicrobial copper push pads
- External stream height adjustment on lower unit
- Hands free VersaFiller
- Built in filter monitor and bottle counter

**Finishes**

- Standard cabinet finish: Sandstone powder coated paint on galvanized steel
- Optional finishes (at additional cost): Stainless steel

**Installation**

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access

**Options (at additional cost)**

- One piece chrome plated brass bubbler (036700-001)
- VersaFilter
- Cane apron (035174-001)

**Limited 5-Year Warranty**

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty**

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

**Certifications/Compliance**

- Antimicrobial Copper - EPA Registration No. 89187-3
- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8EBFSLTM	8.0	8.0	No	No	1/4	4.4	450	No	Yes	109 Lbs
PGEBFSLTM	Fountain Only							No	Yes	79 Lbs

\* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® VERSACOOLER® II

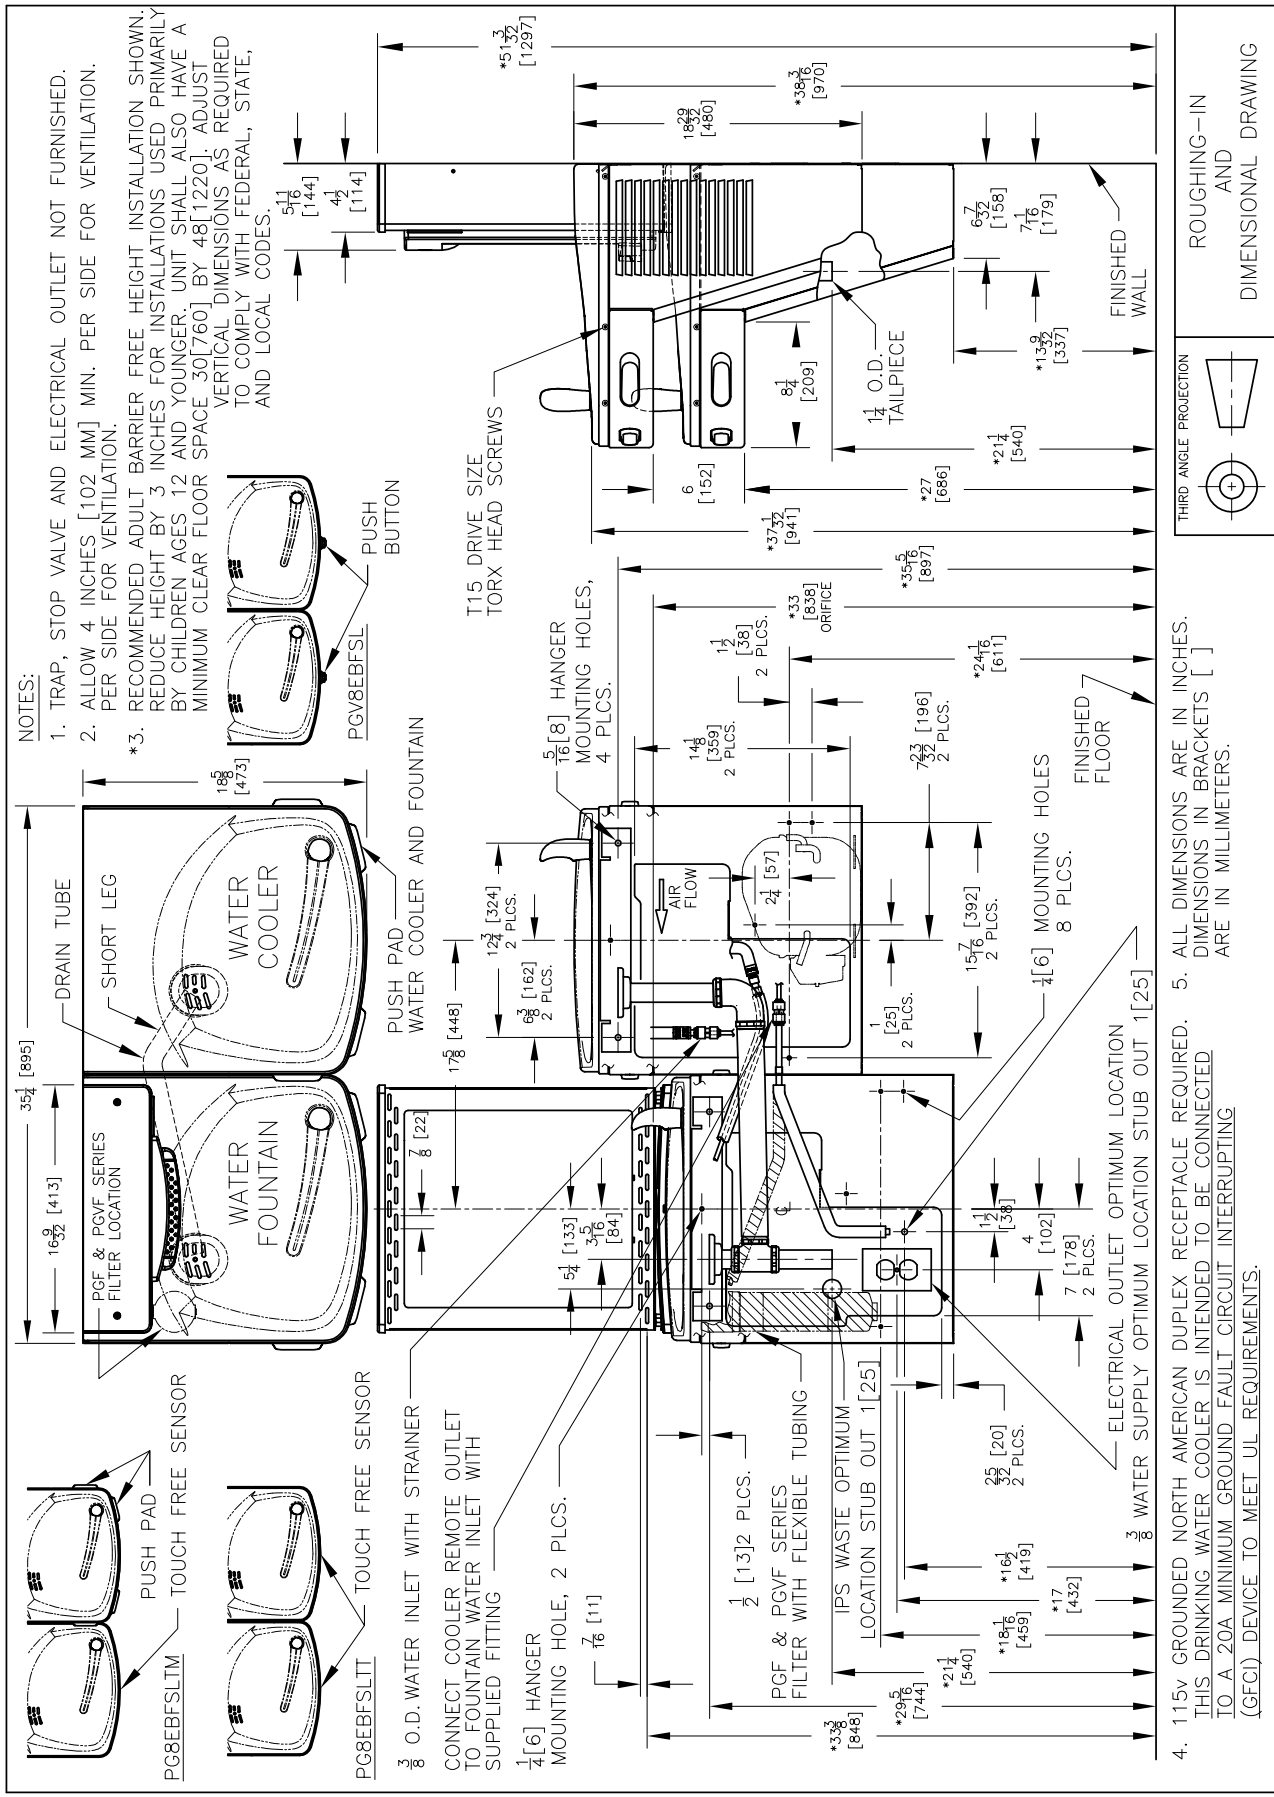

4. 115v GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.

5. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING

Oasis International, 222 East View Campus View Blvd., Columbus, OH 43235  
 For customer service and technical help line assistance call: 800.950.3226

Oasis, VersaCooler, Freshfield and VersaFilter are registered trademarks of LYD Acquisition, LLC dba Oasis International. © 2016 LYD Acquisition



www.oasiscoolers.com