



TOUCH-FREE, BI-LEVEL VERSACOOLER® II W/ HANDS-FREE BOTTLE FILLER

**Energy and Water Conservation Technology
PGF8EBFSLTM, PGFEBFSLTM**

Suggested Specification

Model PGF8EBFSLTM shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PGFEBFSLTM is a non-refrigerated drinking fountain and delivers ambient water. Both shall include the VersaFiller Sports Bottle Filler with hands-free activation; lower unit shall have infrared sensor to activate the flow of water for the cooler. Another unit must have four antimicrobial copper push pads. Hands-free VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Shall have VersaFilter for taste, odor, lead and chlorine reduction. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduces waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be sandstone on galvanized steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Models

- PGF8EBFSLTM delivers 8.0 gallons of chilled drinking water per hour.
- PGFEBFSLTM is a non-refrigerated fountain.

Standard Features

- Universal design allows universal installation
- Infrared sensor activation
- VersaFilter for taste, odor, lead and chlorine reduction
- Built-in 100 micron strainer stops particles before they enter the waterway.
- Waterways are Lead-Free in materials & construction
- Flexible and one-piece antimicrobial water saver bubbler guard
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system
- Four antimicrobial copper push pads
- External stream height adjustment on lower unit
- Hands free VersaFiller

Finishes

- Sandstone powder coated paint on galvanized steel
- Optional finishes (at additional cost): Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access

Options (at additional cost)

- One piece chrome plated brass bubbler (036700-001)
- VersaFilter
- Cane apron (035174-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Antimicrobial Copper - EPA Registration No. 89187-3
- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot* N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGF8EBFSLTM	8.0	8.0	No	No	1/4	4.4	450	No	Yes	110 Lbs
PGFEBFSLTM	Fountain Only							No	Yes	80 Lbs

* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® VERSACOOLER® II

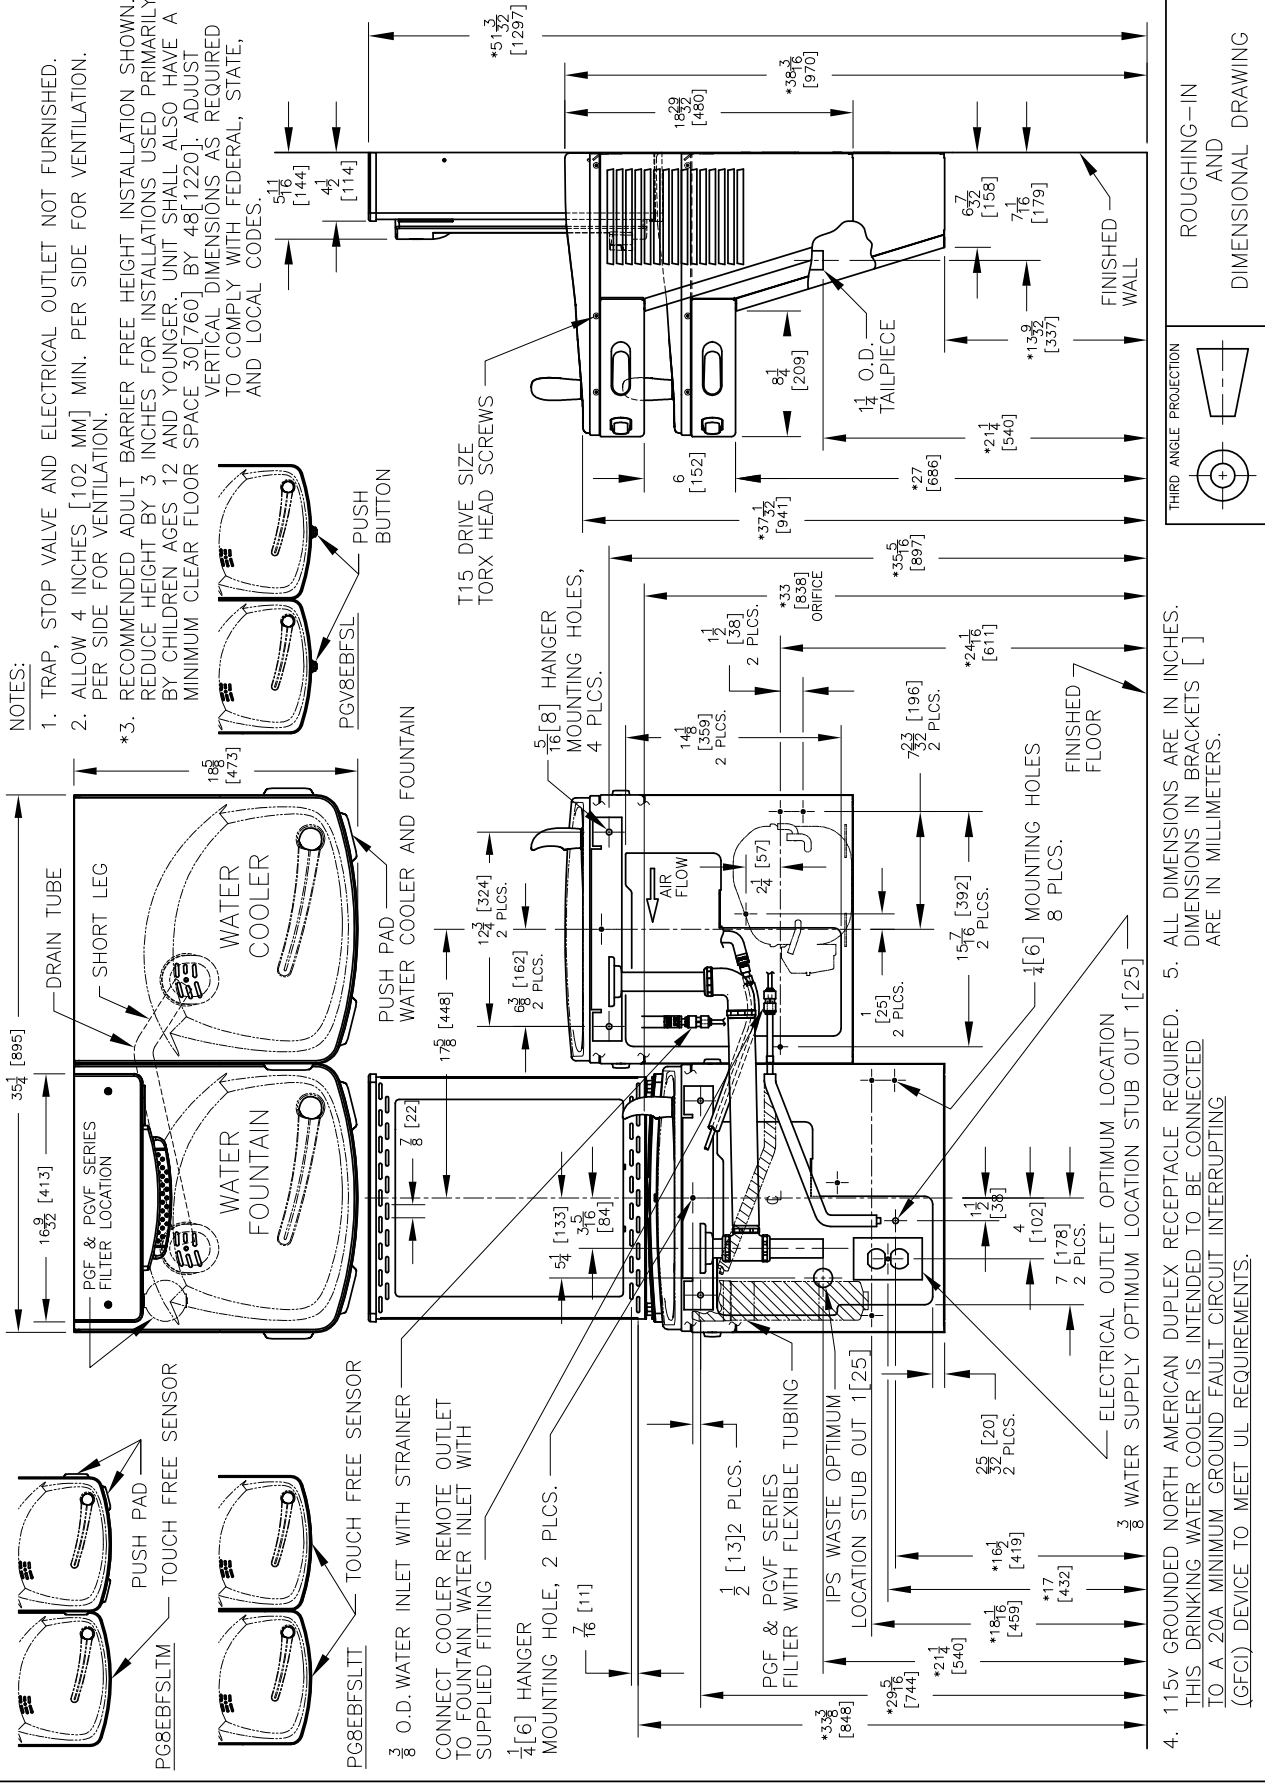

Oasis International, 222 East View Campus View Blvd., Columbus, OH 43235
 For customer service and technical help line assistance call: 800.950.3226