



BI-LEVEL RADII DRINKING FOUNTAIN, REFRIGERATED & MODULAR
 AQUAPOINTE™ ELECTRONIC BOTTLE FILLER, TOTAL PFAS FILTER
MODEL M8CRFEBF-FPF

Suggested Specification

Model M8CRFEBF-FPF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Shall include two vandal-resistant push buttons to activate the flow of water and a low flow one piece bubbler with flexible guard. Shall include the Aqua Pointe Bottle Filler with contactless activation and laminar flow. Shall be recessed in design. The fountains shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Key bottle filler components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Bottle Filler alcove and cabinet finish shall be stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

- Features:**
- Universal design: high right or high left
 - Built-in 100 micron strainer stops particles before they enter the waterway
 - Waterways are lead-free in materials & construction
 - High efficiency cooling system
 - Heavy duty galvanized steel frame
 - Contactless activation bottle filler with programmable auto shut off
 - Two vandal resistant push buttons on fountains
 - Flexible and one-piece water saver bubbler infused with silver-based antimicrobial additive
 - Includes integral self-scouring waste drain
 - Built-in filter monitor and bottle counter
 - Logos permanently formed into the alcove and stainless steel wrapper
 - LED lighted alcove
 - Built in panel locks for easy access to chiller and filtration if applicable

Filtration: OASIS Total PFAS, certified to NSF/ANSI 42, 53, 372 and 401 for chlorine, taste, odor, particulate class 1, lead, cysts, Total PFAS, and microplastics reduction to 1,100 gallons.

Power: 115 Volts, 60 Hz

Activation By: Contactless Sensor on Bottle Filler and Manual Activation on Fountains

Mounting Type: In Wall

Chilling Option: 8.0 gph*

Full Load Amps 5.5 amps

Rated Watts 550

Approx. Net Weight 151 lbs

Installation Location: Indoor



Ships in multiple boxes.

Installation

- Prior to rough-in consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Frame allows for universal installation
- Recessed mounting frame included, but water supply and drain required

Finishes

- Standard cabinet finish: Stainless steel

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system. Bottle fillers, fountains, and electrical components are warranted for 12 months. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature



WARNING:
 Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Specifications subject to change without notice

MODEL: _____ QTY: _____
 PROJECT: _____
 CONTACT: _____
 NOTES: _____
 APPROVAL: _____ DATE: _____



BI-LEVEL RADII DRINKING FOUNTAIN, REFRIGERATED & MODULAR
AQUAPOINTE™ ELECTRONIC BOTTLE FILLER, TOTAL PFAS FILTER
MODEL M8CRFEBF-FPF

Accessories



OASIS Total PFAS Replacement Cartridge

OASIS Item #041668-001

- Certified to NSF/ANSI 42, 53, 372 and 401 for chlorine, taste, odor, particulate class 1, lead, cysts, Total PFAS, and microplastics reduction to 1,100 gallons.



One piece chrome plated brass bubbler


OASIS Item #036700-001



[View all filters and accessories](#)



BI-LEVEL RADII DRINKING FOUNTAIN, REFRIGERATED & MODULAR
 AQUAPOINTE™ ELECTRONIC BOTTLE FILLER, TOTAL PFAS FILTER
MODEL M8CRFEB-FPF

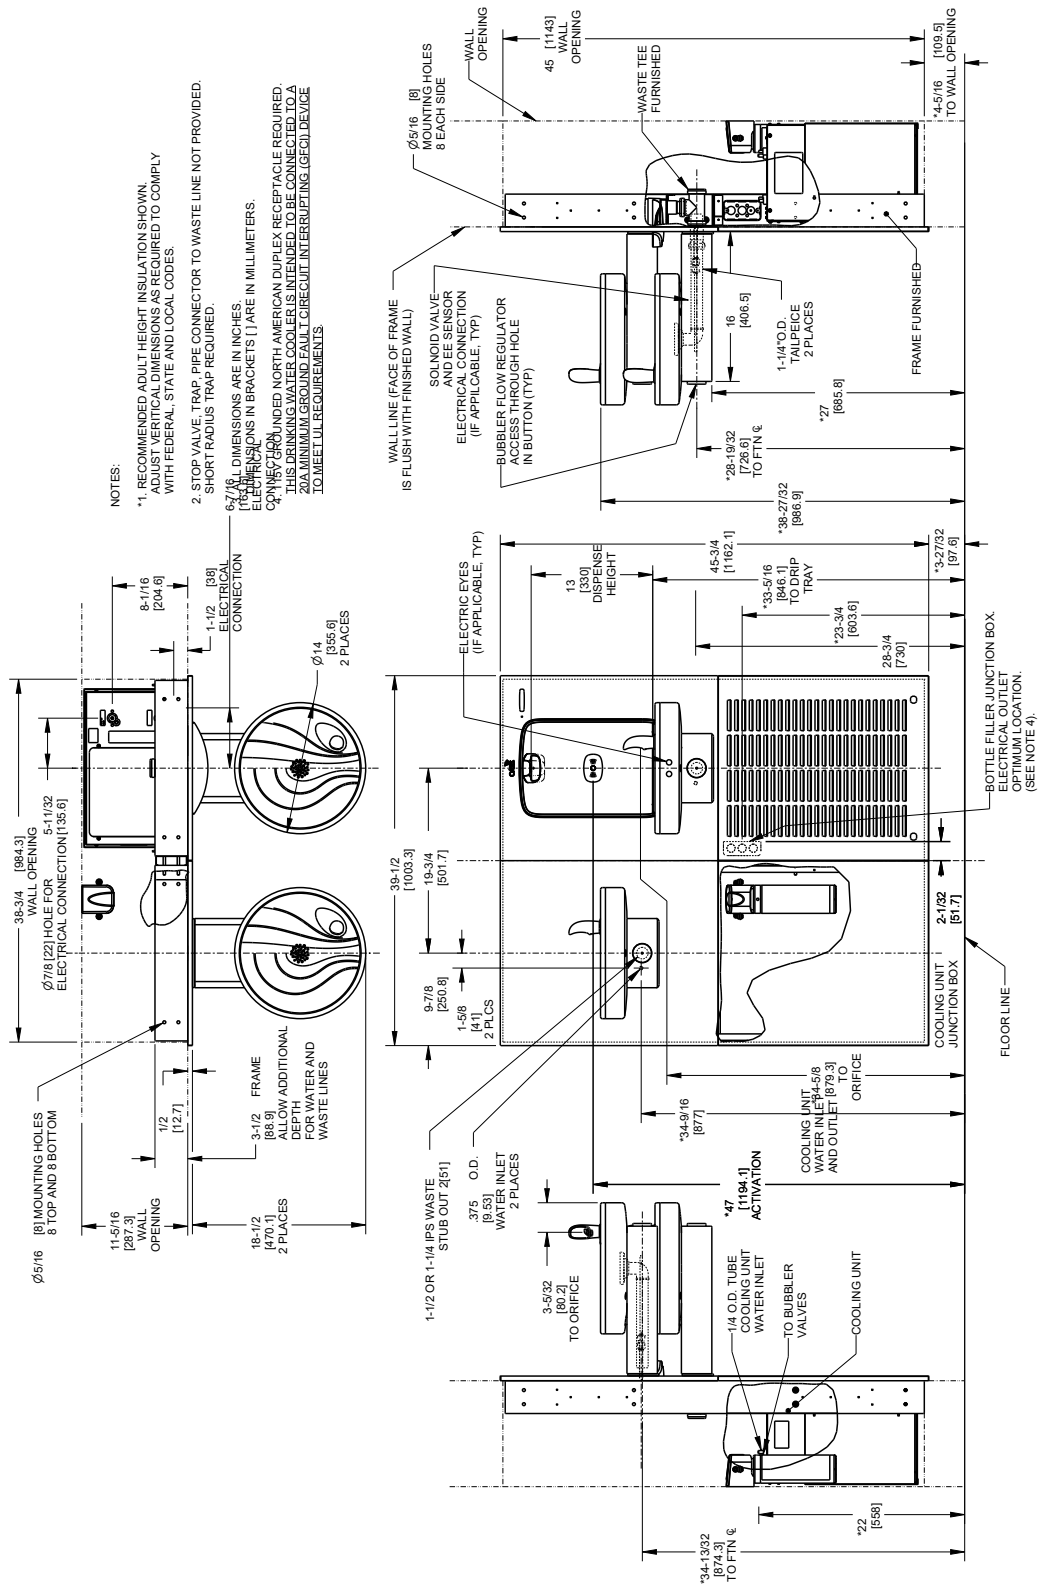

- NOTES:**
- *1. RECOMMENDED ADULT HEIGHT INSULATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
 - *2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED. SHORT RADIIUS TRAP REQUIRED.
- ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
- THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A WATER MAIN OR WATER TREATMENT FACILITY. INTERRUPTING LIFE-CYCLE TO MEET ALL REQUIREMENTS.