



Suggested Specification

Model PFCPD10EBQ shall deliver 10.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Shall be freestanding in design with mechanical foot pedal and laminar flow. QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Bottle Filler alcove and cabinet finish shall be stainless steel. Key bottle filler components contain Freshield, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. An adjustable thermostat having an off position shall control refrigeration system. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

- Features:**
- QUASAR with mercury-free UV-C LED treatment at the dispense point
 - Built-in 100 micron strainer stops particles before they enter the waterway
 - Waterways are Lead-Free in materials & construction
 - High efficiency cooling system
 - Bottle filler with programmable auto shut off
 - High flow output of 1.1 gallons per minute for faster fill up
 - Built in drain - no drip tray to empty
 - Hands-free foot pedal operation for flow of water
 - Easy to wash, removable MERV 3 air filter
 - Built-in filter monitor and bottle counter
 - Logos permanently formed into the alcove and stainless steel wrapper
 - Removable front panel for ease of filter change-out

Filtration:	OASIS Outdoor certified to NSF/ANSI 42, 53, 372 and 401 for lead, cysts, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons.
Power:	115 Volts, 60 Hz
Activation By:	Mechanically Activated foot pedal
Mounting Type:	Free Standing
Chilling Option:	10.0 gph*
Full Load Amps	5.5 amps
Rated Watts	550
Approx. Net Weight	75 lbs
Approx. Gross Weight	81 lbs
Installation Location:	Indoor/Outdoor

When used or stored in non-temperature controlled environments, the unit and filter must be adequately winterized and/or protected from extreme heat to prevent damage.

MODEL: _____ QTY: _____

PROJECT: _____

CONTACT: _____

NOTES: _____

APPROVAL: _____ DATE: _____

OUTDOOR FREESTANDING, QUASAR BOTTLE FILLER, MECHANICAL, REFRIGERATED, OUTDOOR FILTER MODEL PFCPD10EBQ



Ships in one box.

Installation

- Shipped with complete instructions
- Mounting brackets provided

Finishes

- Standard cabinet finish: Stainless steel

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system. Bottle fillers, fountains, and electrical components are warranted for 12 months. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Specifications subject to change without notice



OUTDOOR FREESTANDING, QUASAR BOTTLE FILLER,
MECHANICAL, REFRIGERATED, OUTDOOR FILTER
MODEL PFCPD10EBO

Accessories



OASIS Outdoor Replacement Cartridge

OASIS Item #041667-001

- Certified to NSF/ANSI 42, 53 and 401 for lead, cysts, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons.



[View all filters and accessories](#)




OUTDOOR FREESTANDING, QUASAR BOTTLE FILLER,
MECHANICAL, REFRIGERATED, OUTDOOR FILTER
MODEL PFCPD10EBO


ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS []
ARE IN MILLIMETERS.


ALLOW 4"[102] FOR VENTILATION AT THE
REAR OF THE WATER COOLER AND THE
SIDES IF SET IN AN ALCOVE OR NEAR A
CORNER.

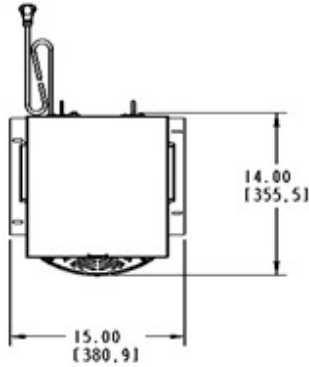


PLAN VIEW

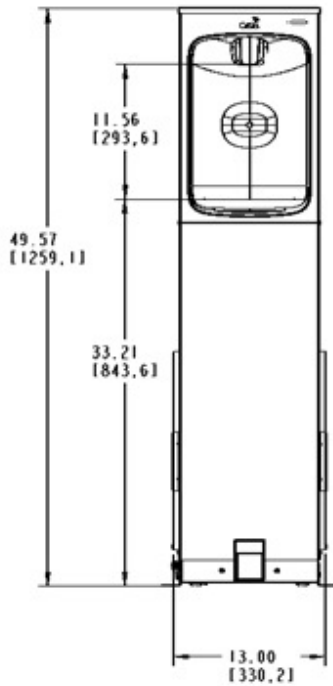

FRONT VIEW

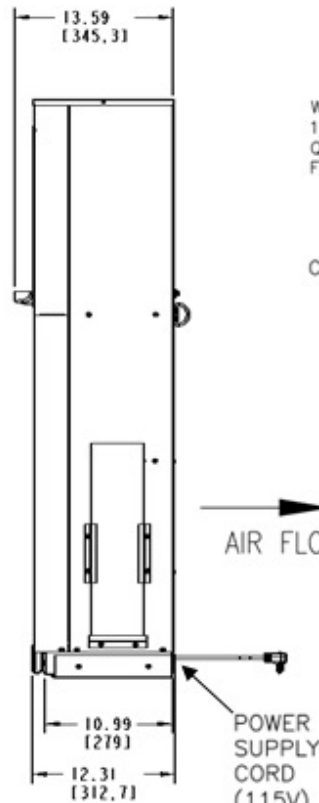

RIGHT SIDE
VIEW

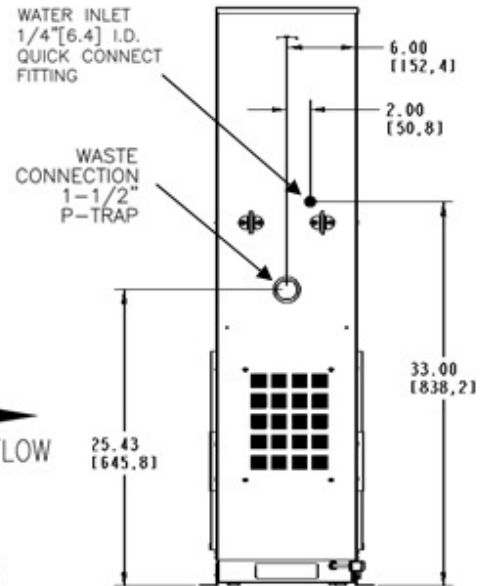

REAR VIEW