



VERSACOOLER™ 14-GAUGE VANDAL RESISTANT BI-LEVEL DRINKING FOUNTAIN, REFRIGERATED, FILTERED MODEL PGVF8ACSL-14G

Suggested Specification

Model PGVF8ACSL-14G shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Cabinet and top basin shall be 14 gauge stainless steel, with a heavy duty galvanized frame, with galvanized steel screens to prevent objects from being inserted into ventilation panels or underside of unit. Shall include a single vandal resistant push button on each fountain to activate the flow of water. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler reduces waste water by 50% and shall operate between 20 and 100 PSI. One-piece low flow vandal resistant chrome plated solid construction metal bubbler keyed into place to prevent vandalism. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Features:	• Universal design: high right or high left
	• Built-in 100 micron strainer stops particles before they enter the waterway
	• Waterways are lead-free in materials & construction
	• 14 gauge stainless steel construction
	• Vandal resistant water saver bubbler
	• One-piece vandal resistant bubbler keyed into position
	• Vandal resistant fasteners
	• Galvanized steel louver and bottom screens
	• High efficiency cooling system
	• Vandal resistant mechanical front push buttons
Choice of Filtration System:	• Includes integral self-scouring waste drain
	• Mechanical activation

Choice of Filtration System:	• OASIS VersaFilter III
	• OASIS Total PFAS Filter
	• OASIS Pharmaceutical Filter

Power:	115 Volts, 60 Hz
Activation By:	Manual activation
Mounting Type:	Wall Mounted
Chilling Option:	8.0 gph*
Full Load Amps	5.0 amps
Rated Watts	500
Approx. Net Weight	74 lbs
Installation Location:	Indoor



Ships in one box.

Installation

- Prior to roughing in, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Finishes

- Standard cabinet finish: Stainless steel

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system. Bottle fillers, fountains, and electrical components are warranted for 12 months. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature

MODEL: _____ QTY: _____
PROJECT: _____
CONTACT: _____
NOTES: _____
APPROVAL: _____ DATE: _____



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



Specifications subject to change without notice



VERSACOOLER™ 14-GAUGE VANDAL RESISTANT BI-LEVEL
DRINKING FOUNTAIN, REFRIGERATED, FILTERED
MODEL PGVF8ACSL-14G

Accessories



OASIS VersaFilter III Replacement Cartridge

OASIS Item #041145-001

- Certified to NSF/ANSI 42, 53 and 401 for lead, Particulate Class I, chlorine, taste, odor and microplastics reduction to 4,750 gallons.



OASIS Total PFAS Replacement Cartridge

OASIS Item #041668-001

- Certified to NSF/ANSI 42, 53 and 401 for chlorine, taste, odor, particulate class I, lead, cysts, Total PFAS, and microplastics reduction to 1,100 gallons.



OASIS Pharmaceutical Replacement Cartridge

OASIS Item #041670-001

- Certified to NSF/ANSI 42, 53 and 401 for chlorine, taste, odor, particulate class I, lead, cysts, Atenolol, Bisphenol A, Carbamazepine, DEET (diethyltoluamide), Estrone, Ibuprofen, Meprobamate, Metolachlor, Naproxen, Nonyl phenol, Phenytoin and Trimethoprim, and microplastics reduction to 725 gallons.





[View all filters and accessories](#)



VERSACOOLER™ 14-GAUGE VANDAL RESISTANT BI-LEVEL
DRINKING FOUNTAIN, REFRIGERATED, FILTERED
MODEL PGVF8ACSL-14G

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
- *3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

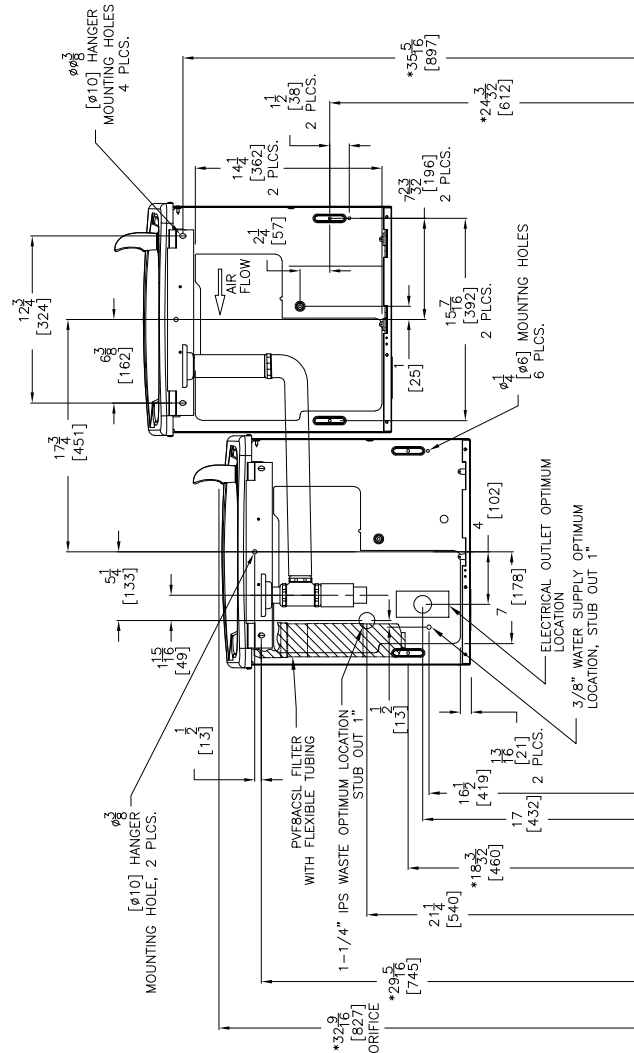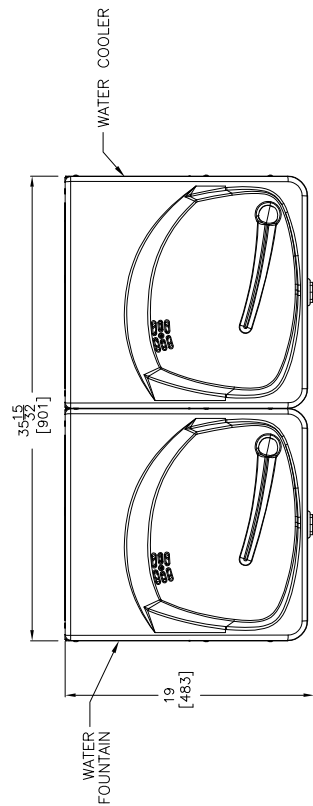

RIGHT SIDE HIGH
CONFIGURATION

