



# Technical Sheet

## Hot 'N Cold On-A-Wall

- PLF8MH
- PLF14MH

### Suggested Specification

Model PLF8MH shall deliver 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water, per ASHRAE 18 testing. Model PLF14MH shall deliver 14.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Shall be a Hot 'N Cold and serves 45 cups of piping hot water per hour. Cabinet finish shall be greystone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI.

### Models

- PLF8MH is a Hot N' Cold and serves 45 cups of piping hot water per hour, plus 8.0 gph of chilled drinking water
- PLF14MH is a Hot N' Cold and serves 45 cups of piping hot water per hour, plus 14.0 gph of chilled drinking water

### Standard Features

- Dial-A-Drink® bubbler
- Waterways are Lead-Free in materials & construction
- Stainless steel top
- Welded, heavy-gauge steel frame
- High efficiency cooling system
- Hot water dispenser with locking lever

### Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

### Options

- Push handle glass fillers (029603-004)
- One piece chrome plated brass bubbler (036700-001)
- VersaFilter

### Limited 5-Year Warranty

(Continental limits of the United States and Canada)  
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.



### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "lead free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8MH	8.0	8.0	No	Yes	1/4	8.7	870	No	Yes	75 Lbs
PLF14MH	14.0	7.8	Yes	Yes	1/4	8.7	870	No	Yes	80 Lbs

\*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® SIMULATED SEMI-RECESSED WATER COOLERS MODELS

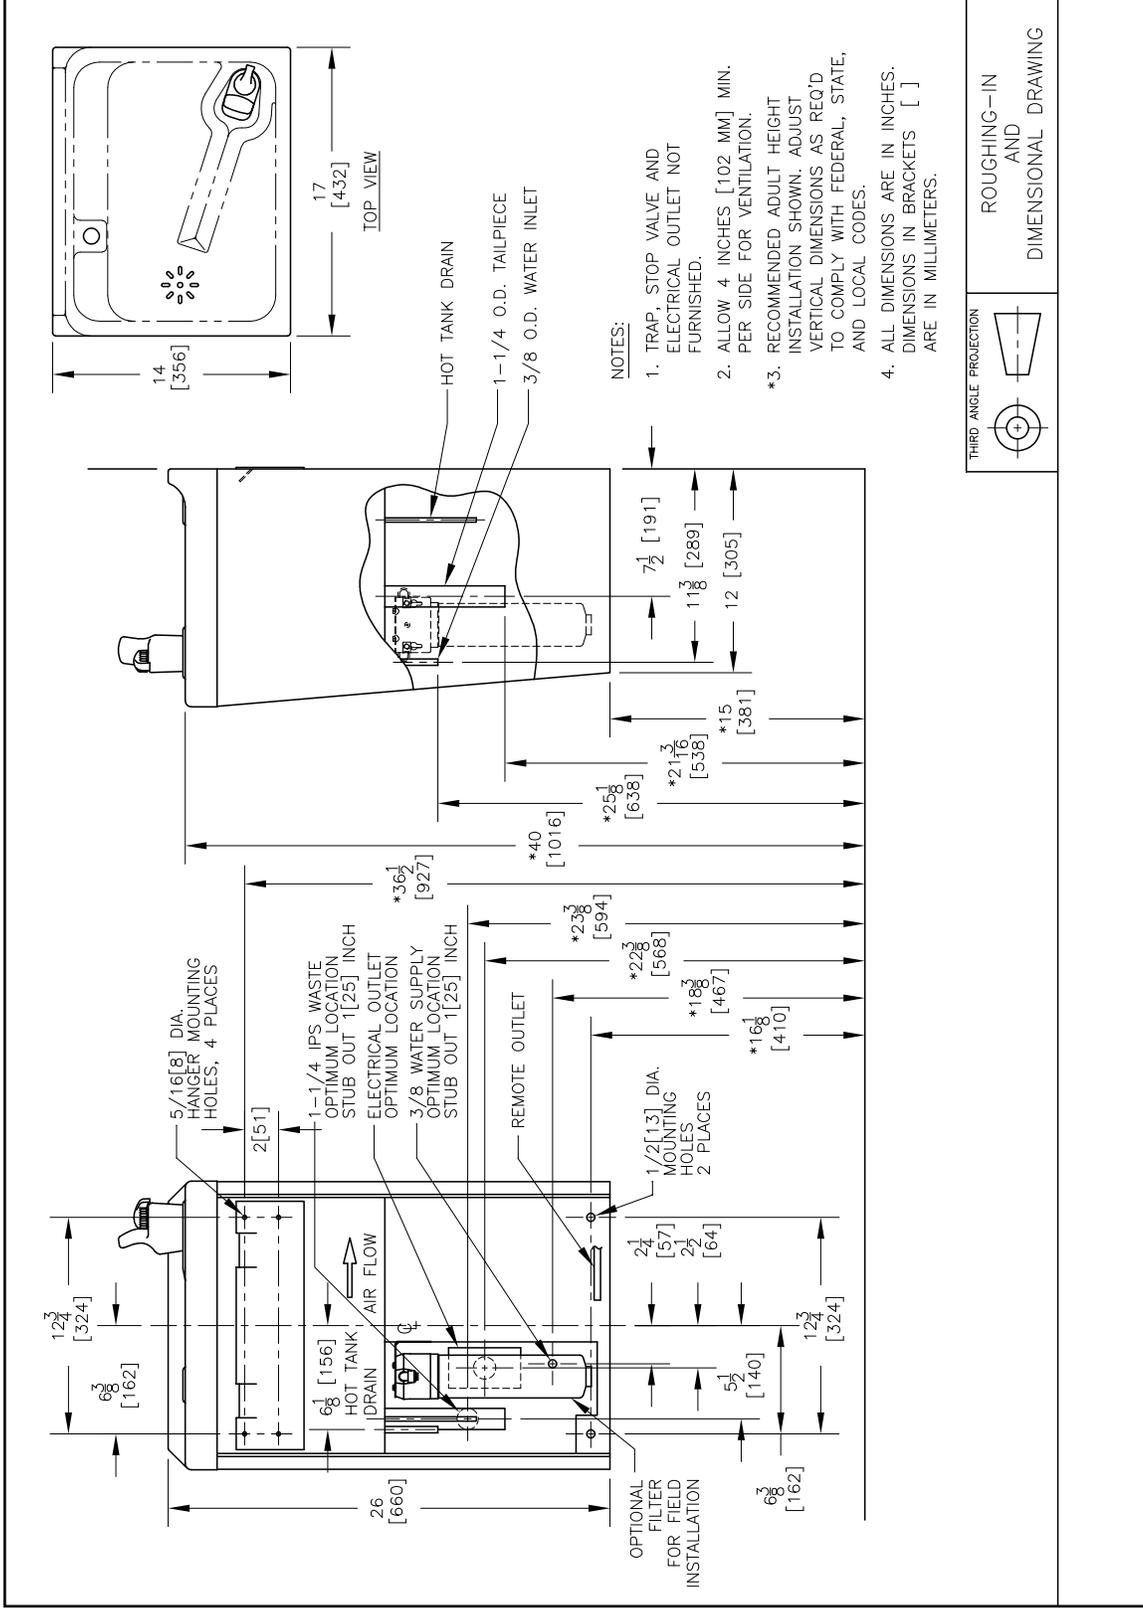

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0014-F-1912

**OASIS INTERNATIONAL** [www.oasiscoolers.com](http://www.oasiscoolers.com)  
 222 East Campus View Blvd.  
 Columbus, OH 43235  
**1-800-646-2747**