



# We Know Water.

## CONTACTLESS SURFACE MOUNT QUASAR® VERSAFILLER® WITH VERSAFILTER III AND REMEDI FILTER

### • PWSMF2EBQ

#### Suggested Specification

VersaFiller alcove and cabinet shall be stainless steel. Key VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Shall be surface mount in design. Unit shall include filter monitor and bottle counter.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

<b>Features:</b>	• Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point
	• Built-in 100 micron strainer stops particles before they enter the waterway
	• Waterways are lead-free in materials & construction
	• Heavy duty galvanized steel frame
	• Contactless activation bottle filler with programmable auto shut off
	• VersaFilter III and Remedi filters located in bottle filler
	• Built-in filter monitor and bottle counter
	• Logos permanently formed into the alcove and stainless steel wrapper
	• LED lighted alcove
	• Surface mount frame assembly

**Filtration:** VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons

**Power:** 115 Volts, 60 Hz

**Activation By:** Contactless Sensor

**Mounting Type:** Wall Mounted

**Chilling Option:** Non-refrigerated

**Full Load Amps:** 0.40

**Rated Watts** 20

**Approx. Net Weight:** 20 lbs.

**Installation Location:** Indoor

Note: Chiller units sold for these models must be remotely located, as they do not fit into the housing of the unit, or inside the wall cavity of a typical stud wall.



#### Installation

- Prior to rough-in consult with local, state, and federal codes for proper mounting height.
- Surface mount frame included, but water supply and drain required
- Shipped with complete instructions and wall mounting brackets.

#### Finishes

- VersaFiller cabinet finish is stainless steel

#### Options

- Remote Chiller

#### Limited 1-Year Warranty

(Continental limits of the United States and Canada)  
One year on components parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

#### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

#### Certifications/Compliance


- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed

**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



Specifications subject to change without notice

# OASIS CONTACTLESS SURFACE MOUNT QUASAR® AQUA POINT™ WITH VERSAFILTER III AND REMEDI FILTER

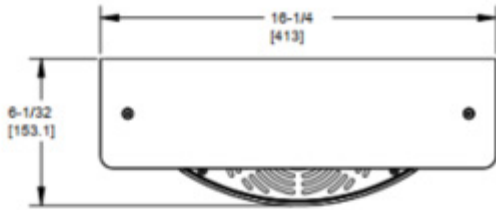

**NOTES:**

- 1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
- 2. 3/8 O.D. WATER INLET WITH STRAINER PROVIDED.
- 3. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE AND 3/8 COMPRESSION FITTING NOT PROVIDED.
- 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

