



Water Coolers

FREE-STANDING LARGE CAPACITY

NSFD20CP

Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Model

NSFD20CP delivers 20.0 gph of chilled drinking water and is corrosion resistant and has a stainless steel cabinet, frame, base parts and fasteners. Special protective coating is applied to compressor, condenser, cooling tank, pre-cooler, water drain and interconnecting water and refrigerant lines.

Standard Features

- > Waterways are lead-free in materials and construction
- > Dial-A-Drink® Bubbler
- > Stainless steel top
- > Heavy-gauge steel cabinet with separate galvanized steel base
- > High-efficiency cooling tank and coil.
- > Refrigerant R-134a
- > Limited 5-year warranty

Finishes

- > Standard cabinet finish: Stainless Steel.

Accessories

- > Glass Filler - Push Handle (029603-004)
- > Glass Filler - Push Back (029603-005)
- > Glass Filler - Push Down (029603-005)
- > Kit 031505-001 is required for Field Installation for the above glass fillers
- > Foot pedal operated



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Export Warranty:

One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standard.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model**	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
NSFD20CP	20.0	11.0	Yes	No	1/2	7.3	830	Yes	No	91 Lbs.

*Industry Standard Rating Condition 80°F inlet water temperature.

Specifications subject to change without notice

SUNROC® FREE-STANDING WATER COOLER MODEL NSFD20CP

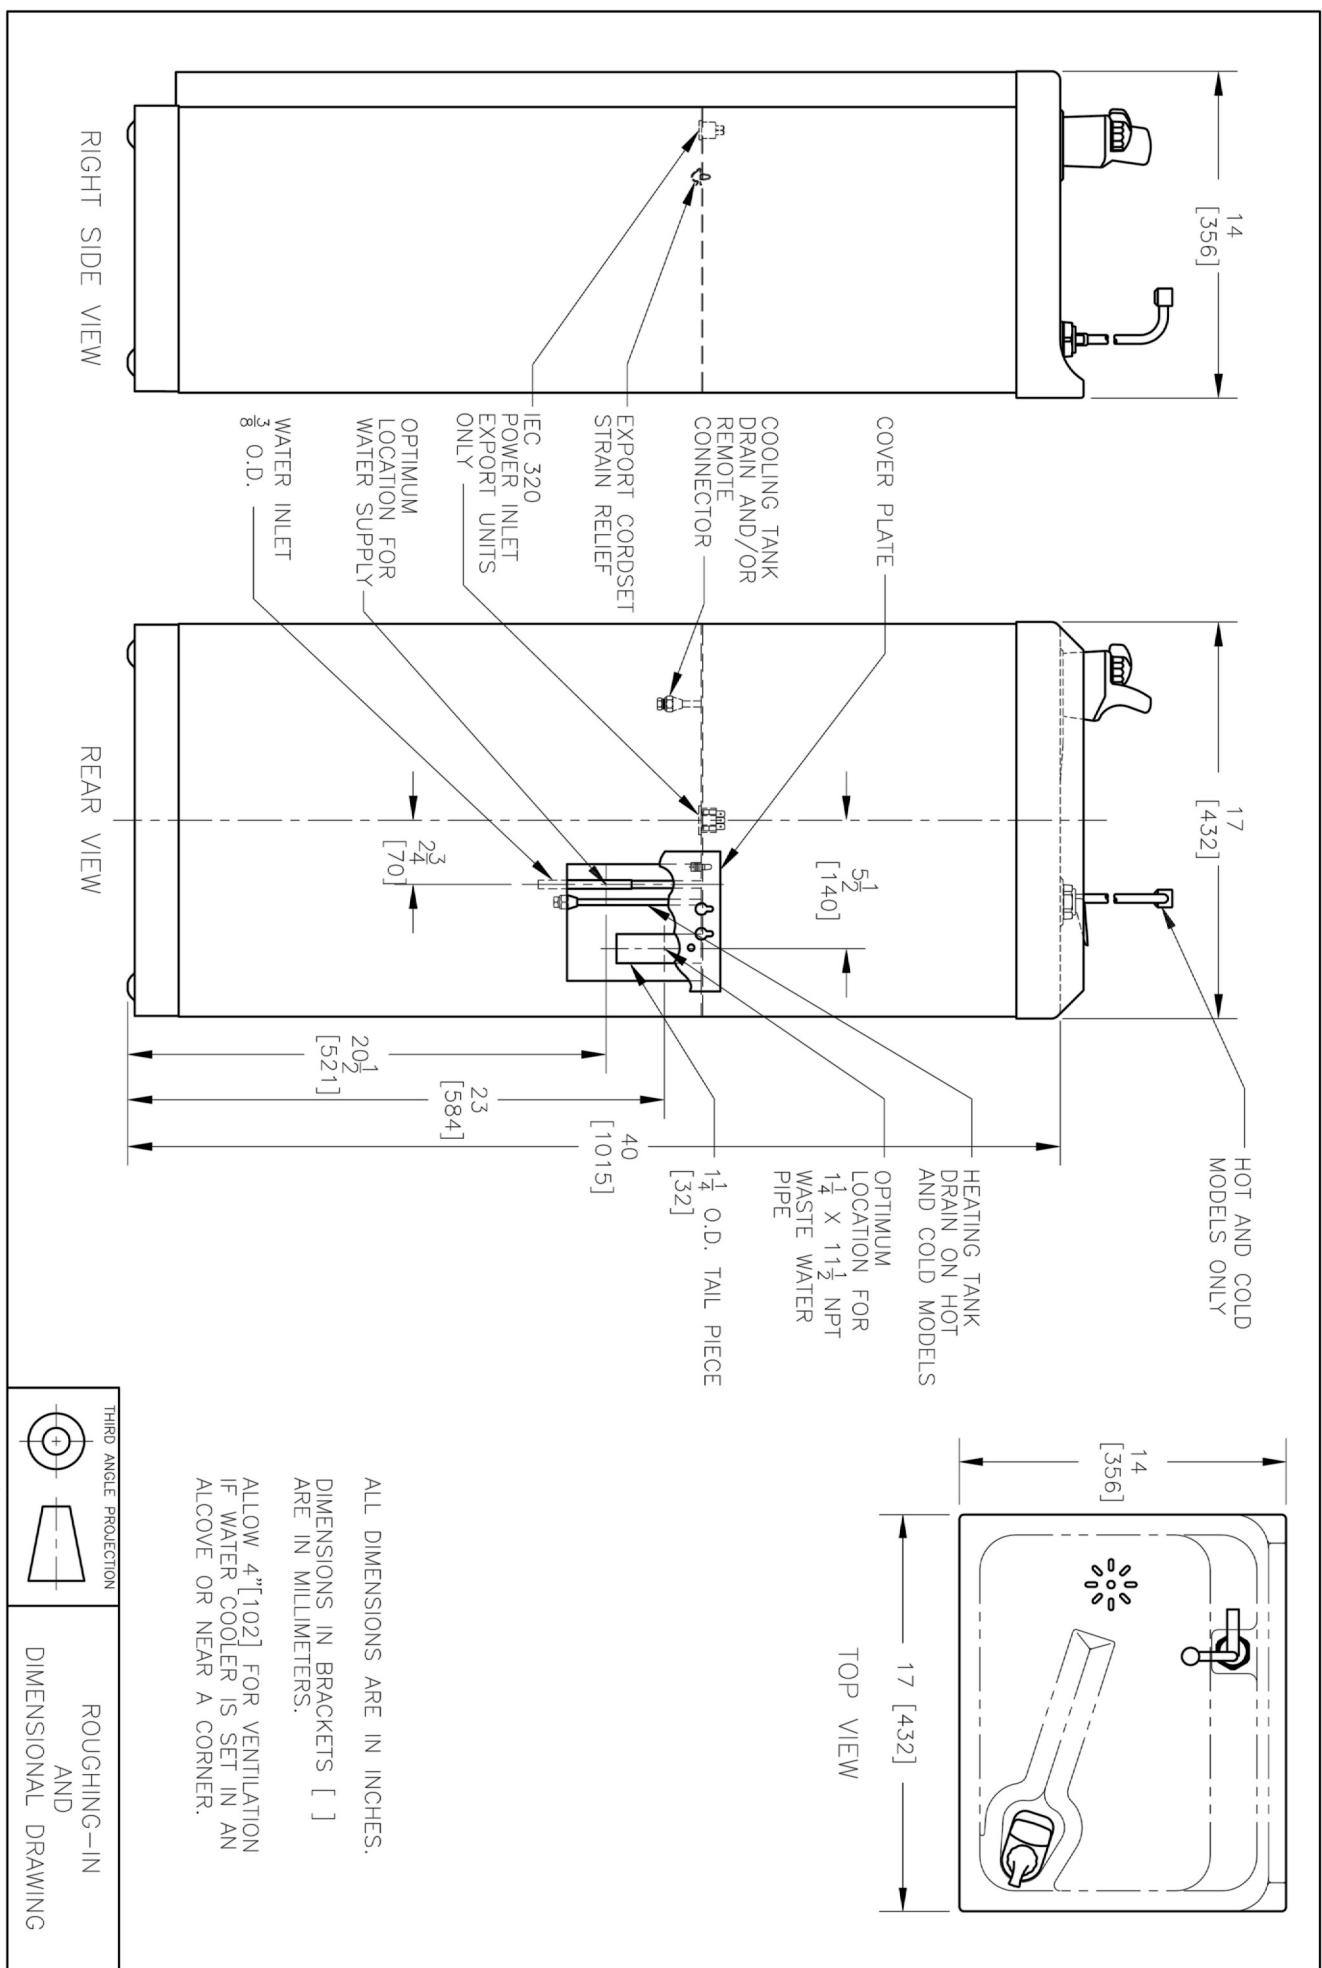

ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS
ARE IN MILLIMETERS.

ALLOW 4" [102] FOR VENTILATION
IF WATER COOLER IS SET IN AN
ALCOVE OR NEAR A CORNER.



ROUGHING-IN AND DIMENSIONAL DRAWINGS