



Water Coolers

AGAINST-A-WALL OR FREE-STANDING

NSFD8, NSFD14

Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Model

NSFD8 delivers 8.0 gph of chilled drinking water

NSFD14 delivers 14.0 gph of chilled drinking water

Standard Features

- > Waterways are Lead-Free in Materials and Construction
- > Dial-A-Drink® Bubbler
- > Stainless steel top
- > Heavy-gauge steel cabinet with separate galvanized steel base
- > High-efficiency cooling tank and coil.
- > Refrigerant R-134a
- > Certified to NSF/ANSI Standard 61, Annex G (AB1953)*
- > Limited 5-Year Warranty


*Model P14FA is not NSF Certified

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes (at additional cost): Stainless Steel and optional powder coated finishes.

Installation

- > Prior to roughing-in, consult local, state and federal codes
- > Shipped with complete instructions

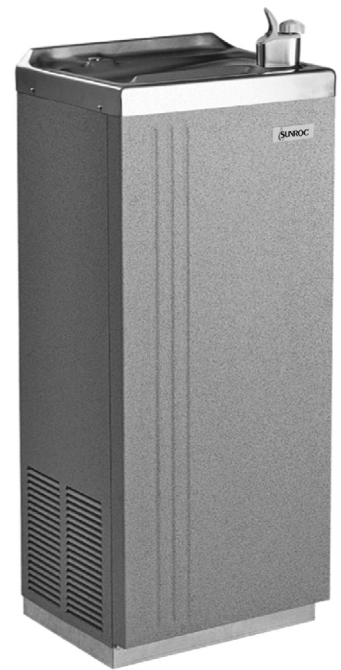

Options

- > Push Handle 029603-004
- > Push Back 029603-005
- > Push Down 029603-006
- > Kit 031505-001 is required for Field Installation of the above glass fillers (except Model PLF8FAH, PLF14FAH)
- > Foot pedal operated



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Export Warranty: One year on sealed refrigeration system and most parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Union Directives.



Certified to
NSF/ANSI 61/ Section 9

Applicable to
model NSFD8.
Model NSFD14 is
not NSF certified.

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
NSFD8	8.0	8.0	No	No	1/4	4.4	500	Yes	Yes	94 Lbs.
NSFD14**	14.0	8.0	Yes	No	1/4	4.4	500	Yes	Yes	96 Lbs.

Specifications subject to change without notice

*Industry Standard Rating Condition 80° F inlet water temperature.

**Special export models available, operable on 220-240 volts, 50/60 Hertz. cULus certification not applicable.

SUNROC® FREE-STANDING WATER COOLER MODEL NSF8, NSF14

