



Water Coolers

HOT'N COLD ON-A-WALL

NSWD14H

Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Models

NSWD14H is a Hot 'N Cold and serves 45 cups of piping hot water per hour, plus 14 gph of chilled water.

Standard Features

- > Waterways are Lead-Free In Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Welded Heavy-Gauge Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > Limited 5-year Warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on Galvanized Steel.
- > Optional finishes (at extra cost): Stainless Steel, Regency Bronze, optional powder coated finishes.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Installation

- > Prior to roughing-in consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable panels provide easy access for installation.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on the sealed refrigeration system and most component parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953). Units incorporating the Green Filter option are not NSF approved. However, the Green Filter has been independently tested to the NSF standards 42 and 53.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.




| Model | 50° F Drinking Water 90° F Ambient Air Temp* | | | Hot'N Cold™ Model** | 115 Volts, 60 HZ | | | Glass Filler Acc. Option | Cabinet Color Finish | Net Wt. Approx. |
|-----------|---|------------------|------------|------------------------|------------------|-------------------|----------------|-----------------------------|-------------------------|--------------------|
| | Rated Capacity GPH | Base Rate GPH | Pre-Cooler | | Compr. HP | Full Load Amps | Rated Watts | | | |
| NSWD14H** | 14.0 | 7.8 | Yes | Yes | 1/5 | 8.9 | 900 | No | Yes | 79 Lbs. |

*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

SUNROC® ON-A-WALL WATER COOLER MODEL NSW14H

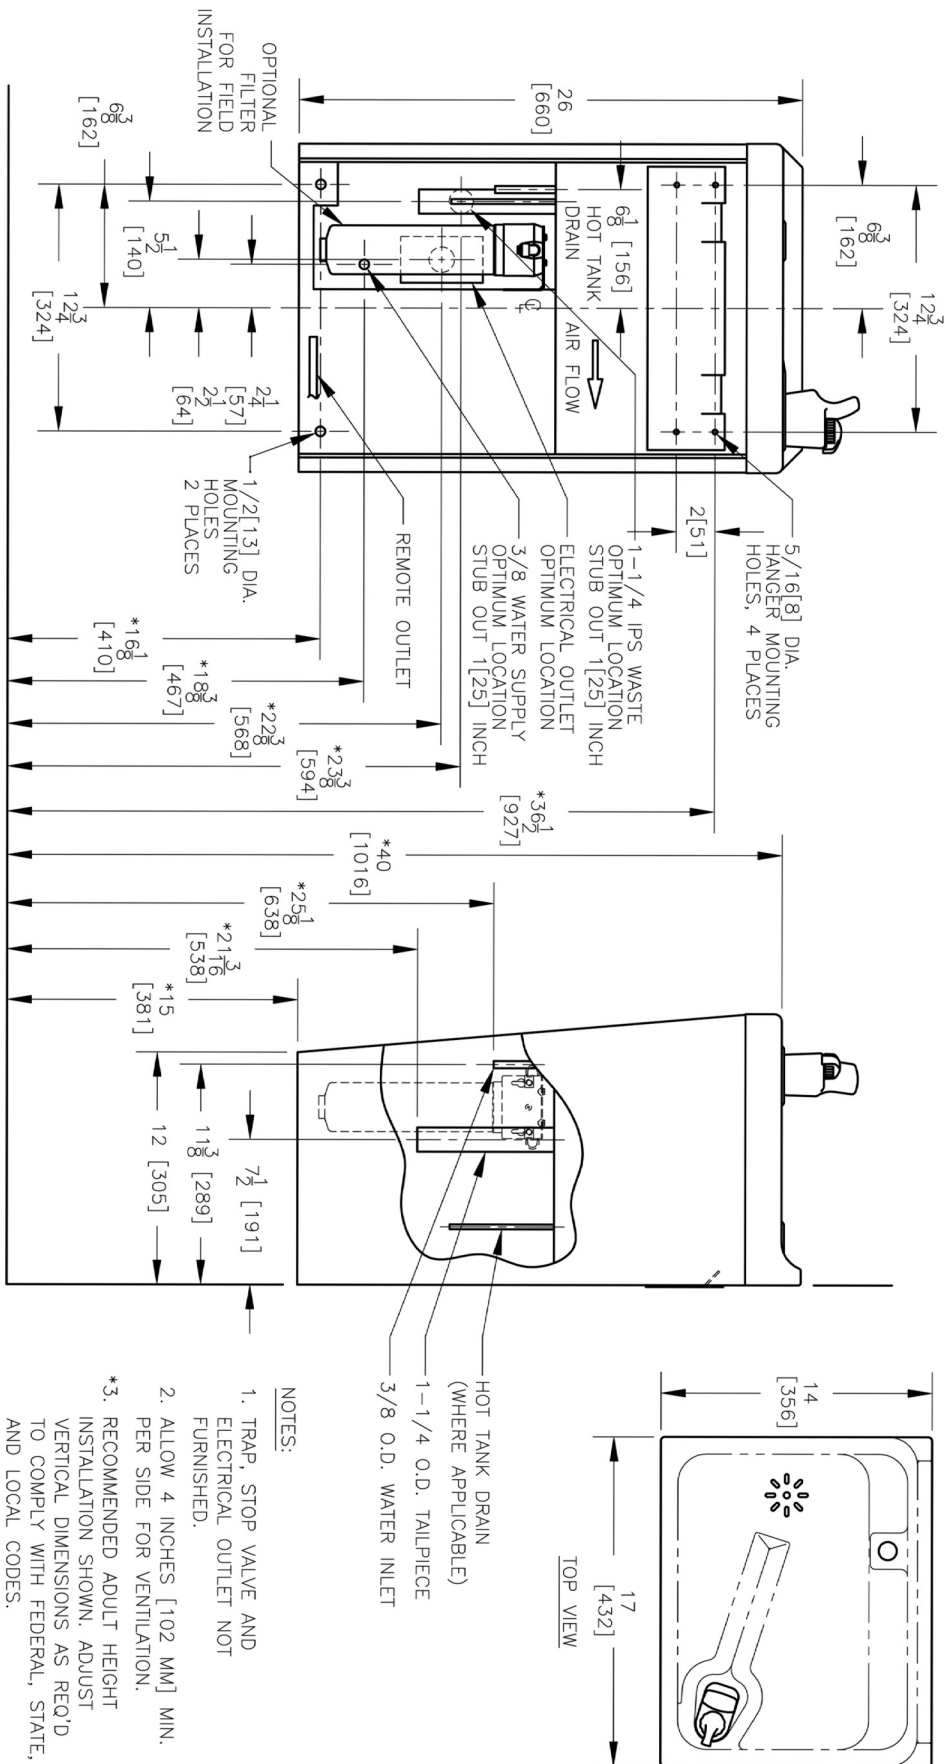

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING