



## SIMULATED SEMI-RECESSED

# PSRD8, PSRD14

### Suggested Specification

Models PSRD8 shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PSRD14 shall deliver 14.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Cabinet finish shall be Powder Coated Paint or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

### Models

**PSRD8** delivers 8.0 gph of chilled drinking water.  
**PSRD14** delivers 14.0 gph of chilled drinking water.

### Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Welded, Heavy-Gauge Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Limited 5-year Warranty

### Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint
- > Optional finishes (at extra cost): Stainless Steel, Regency Bronze.



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

### Installation

- > Prior to roughing-in consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable panels provide easy access for installation.

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of  $\leq 0.25\%$ ) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.




Certified to NSF/ANSI 61/ Section 9

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PSRD8	8.0	8.0	No	No	1/5	4.3	500	No	Yes	67 Lbs.
PSRD14	14.0	8.0	Yes	No	1/5	4.3	500	No	Yes	69 Lbs.

\*Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

# SUNROC® SIMULATED SEMI-RECESSED WATER COOLER MODELS PSRD8, PSRD14

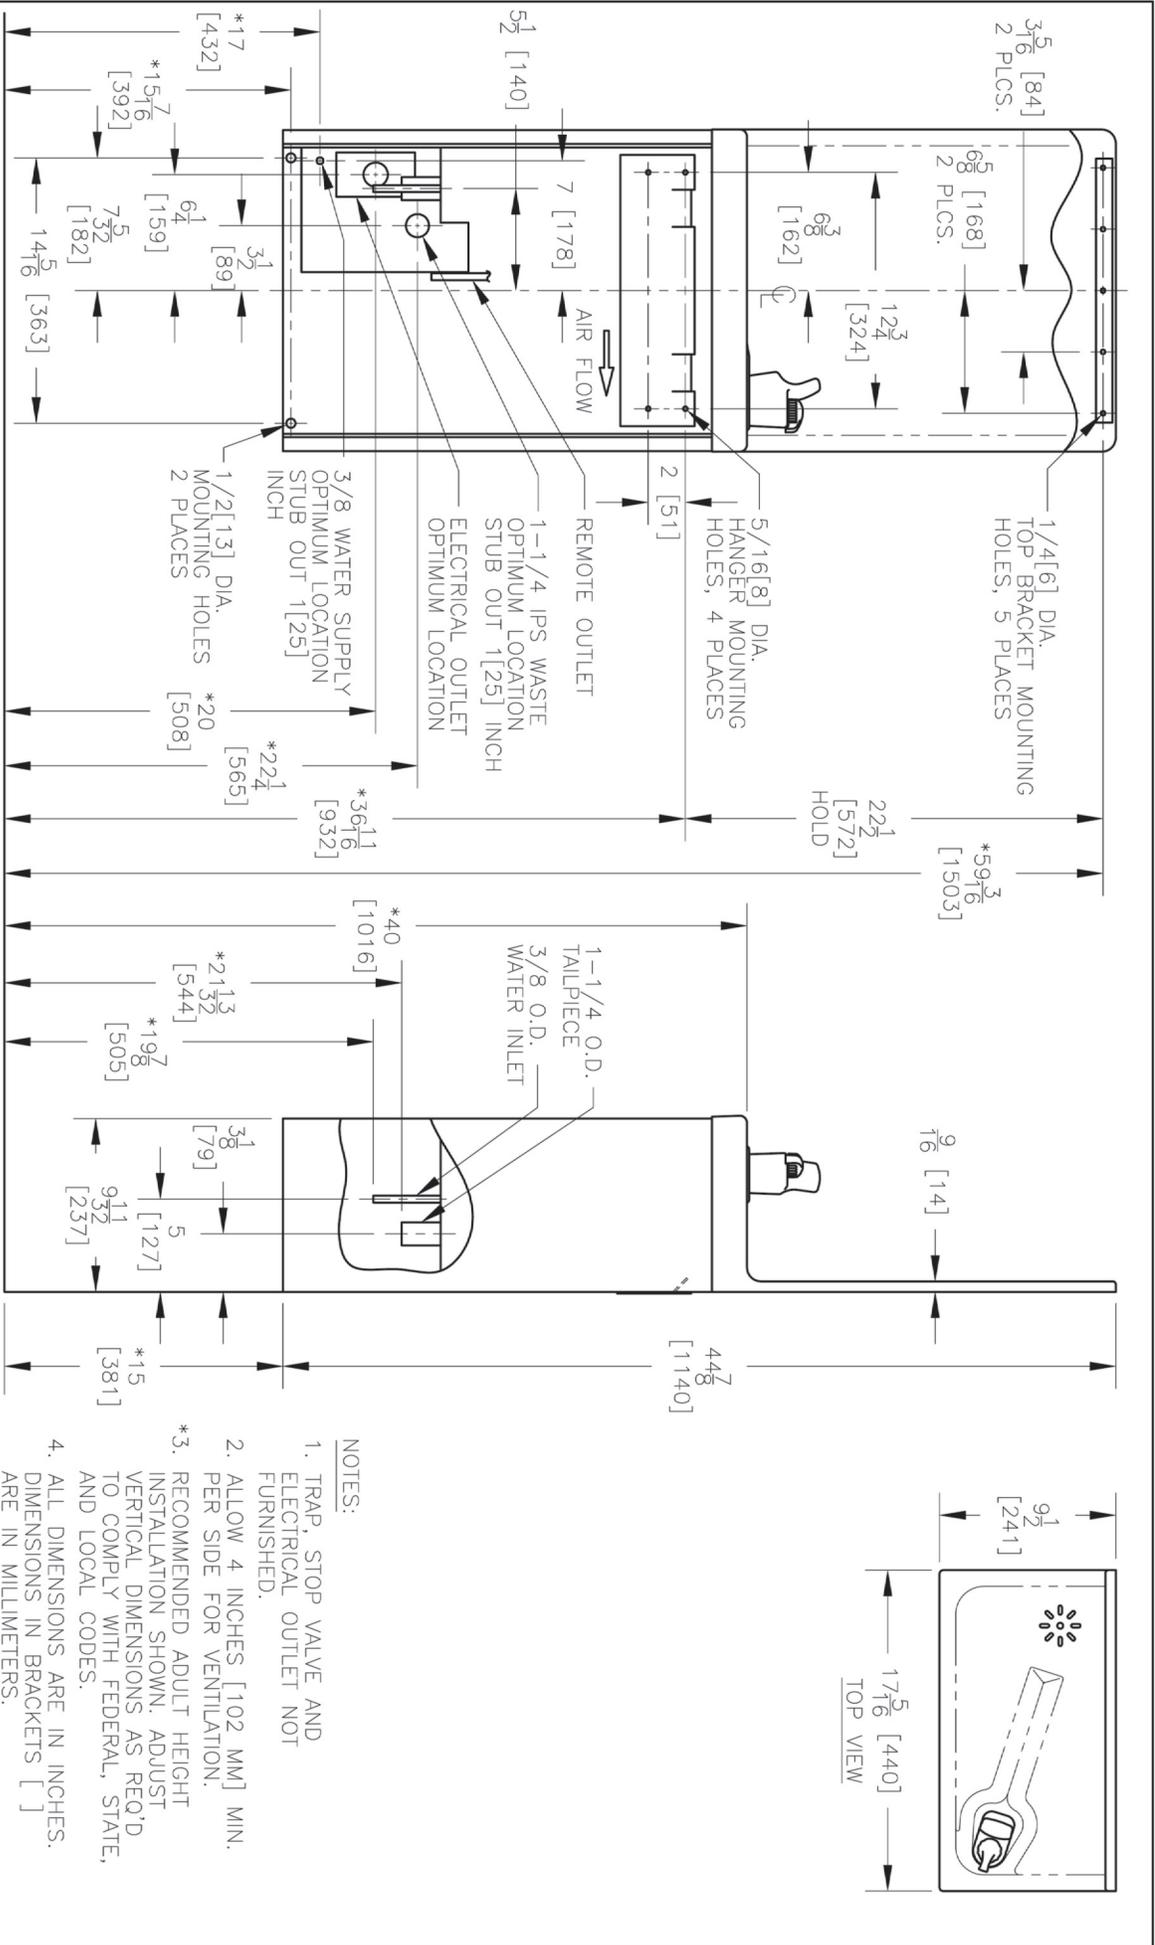

- NOTES:
1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
  2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
  3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--