

model 5452HST

Valve Handle

FEATURES & BENEFITS

OPTIONS

For more information, visit www.hawsco.com or call (888) 640-4297.



SPECIFICATIONS

5452HST handle and stem assembly includes a PCP handle, cap, nylon lock nut, nylon and brass thrust washers, stainless steel wave washer, PCP lever handle with set screw, bearing set, bonnet cap, bonnet washer, gland packing, gland, spring, stem, seat washer, seat washer screw, renew seat and a seat o-ring. Used on models made in 2005 and newer.


APPLICATIONS


NOTES:

1 IF NEEDED, WHEN RE-ASSEMBLING VALVE TIGHTEN DOWN ON (EXISTING) 3/8"-24 LOCK NUT USING A 9/16" BOX WRENCH AND A 5/32" ALLEN WRENCH (TO KEEP VALVE STEM (ITEM 14) FROM TURNING) UNTIL ACHIEVING A SLIGHT PLAY ON HANDLE. CAUTION: DO NOT OVER TIGHTEN NUT. VALVE WILL LEAK,

2 LUBRICATE WITH GREASE BEFORE ASSEMBLY.



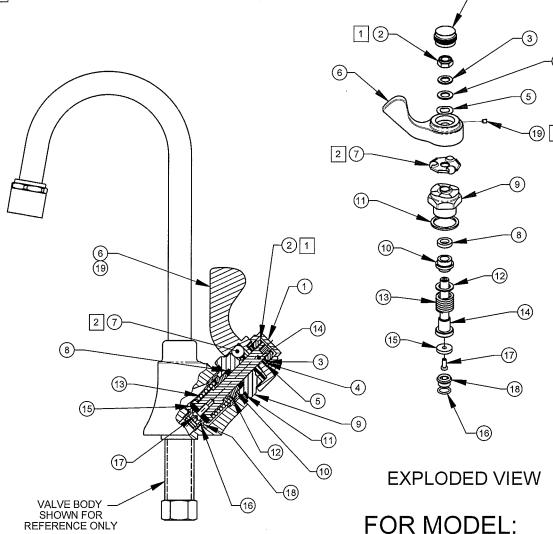



ASSEMBLED VIEW

1	19	0005063885	SCREW, SET 6-32 UNC
1	18	0005208682	SEAT F/5830HST
1	17	0005064870	SCREW, 8-32 X 3/8"
1	16	0003981050	O-RING, .426 X .070 WALL
1	15	0006634576	WASHER, .660 X .170 X .125
1	14	0005532750	STEM, VALVE
1	13	0005425392	SPRING, .73 X 1.25 X 2.50mm
<u> 1</u>	12	0006634380	WASHER, .75 X .494 X .040
1	1	0006634184	WASHER, 1.165 X .951 X .073
1	0	0002583484	GLAND
	9	0000356123	BONNET, FAUCET
- 8	8	0002582902	GLAND PACKING
-	7	0000192993	BEARING SET
(3	0002689126	HANDLE, LEVER F/5452LF
	5	0006626653	WASHER, WAVE 5/16"
	4	0006633792	WASHER, .650 X .380 X .040
	3	0006633596	WASHER, .625 X .390 X .048
2	2	0003801119	NUT, 3/8-24 UNF NYLON LOCK
1		0001464267	INDEX CAP
ΙT	ЕМ	PART NO.	DESCRIPTION



1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (755) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM

CN NO. REVISED PER BY:
LECN: 4699 | HILY
AWN: | DATE | CHEO.
RTM | g301/00 | HANDLE/STEM ASSEMBLY
PROVED | DATE | CHEO.
RTM | GATE | CHEO.
RTM | G

5452LF

(1) [3