

### PRODUCT SPECIFICATIONS

Elkay Pro Filtration Stage 1 Sediment Prefilter. Overall dimensions are 3-1/8" x 3-1/8" x 7-13/16".

<b>Special Features:</b>	Filtered
<b>Dimensions:</b>	3-1/8" x 3-1/8" x 7-13/16"
<b>Shipping Weight:</b>	2 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** Replacement filter exclusively for use in Elkay Pro Filtration Bottle Filling Stations



- Two-Stage Filtration: Pairs with bottle filling station and primary filter to enhance the system's ability to reduce sediment build-up and combat harmful contaminants
- Better Water Quality: Improves taste and appearance of water
- Certified Filtration: Elkay Pro Filtration® Sediment Pre-Filter is certified by IAPMO R&T to NSF/ANSI 42 for material safety and structural integrity only, and to NSF/ANSI/CAN 372 for lead free compliance
- High Performance: Rated for 75-gram average weight dirt holding capacity to effectively reduce sediment build-up in areas where dirt and sand are present in the water supply
- Long Filter Life: For best results, replace prefilter every six months or as needed, depending on water quality
- Easy Filter Access: Prefilter is installed directly in the top of Elkay Pro Filtration bottle filling stations for fast filter changes



**Included with Product:** Sediment replacement filter cartridge

A Century of Tradition and Quality.  
For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

**Product Compliance:** NSF 42  
NSF 372 (lead free)

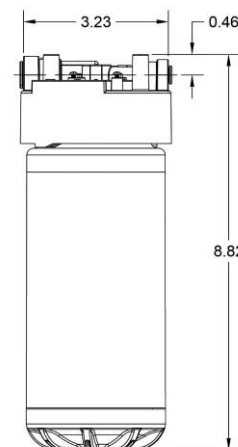

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*