

GENERAL

#14 gauge, type 304 (18-8) stainless steel service sink with 1-3/4" (44mm) radius vertical and horizontal coved corners, 1-1/2" (38mm) rolled rims. Full length 12" (305mm) high back-splash. Exposed surfaces are hand blended to a uniform lustrous satin finish. Furnished with wall hanger and stainless steel support brackets.

(CHECK MODEL SPECIFIED)

□ ESS2118C	□ ESSB2118C	□ ESSW2118C
□ ESS2319C	□ ESSB2319C	□ ESSW2319C
□ ESS2520C	□ ESSB2520C	□ ESSW2520C
ESS2520C	ESSB2520C	ESSW2520C

FURNISHED COMPLETE WITH "ESS" SERIES:

SUPPLY: **LK69C**. (Pair) Chrome plated single bib service faucets. Pair includes (1) hose thread outlet and (1) plain outlet.

DRAIN: LK173. Cast iron, "P" trap standard.

FURNISHED COMPLETE WITH "ESSB" SERIES:

- SUPPLY: LK907BR03L2H. 3" (76mm) Bucket Hook Faucet, rough chrome finish, 1/2" (13mm) NPT female inlets.
- DRAIN: LK173. Cast iron, "P" trap standard.

FURNISHED COMPLETE WITH "ESSW" SERIES:

SUPPLY: **LK940C**. 7" (178mm) Bucket Hook Faucet, rough chrome finish, 1/2" (13mm) NPT female inlets.

DRAIN: LK173. Cast iron, "P" trap standard.


FOLLOWING MODELS DO NOT INCLUDE FAUCET & TRAP STANDARD: (Specify faucet drillings and location desired)


□ ESS2118 □ ESS2319 □ ESS2520


DIMENSIONS

Model		A	I	B	(C		D		E		F
Number	in.	mm										
*2118	21	533	17½	445	18	457	14	356	10½	267	9	229
*2319	23	584	18½	470	20	508	15	381	11½	292	9½	241
*2520	25	635	19½	495	22	559	16	406	12½	318	10	254

*Above dimensions refer to ESS, ESSB and ESSW Series.






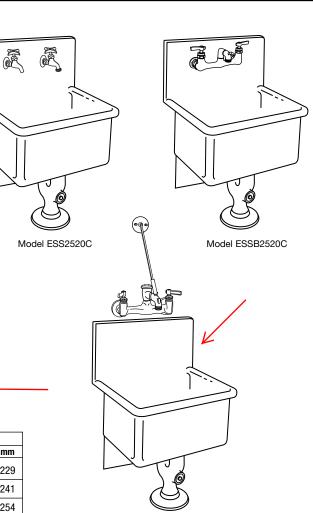

Model ESSW2520C



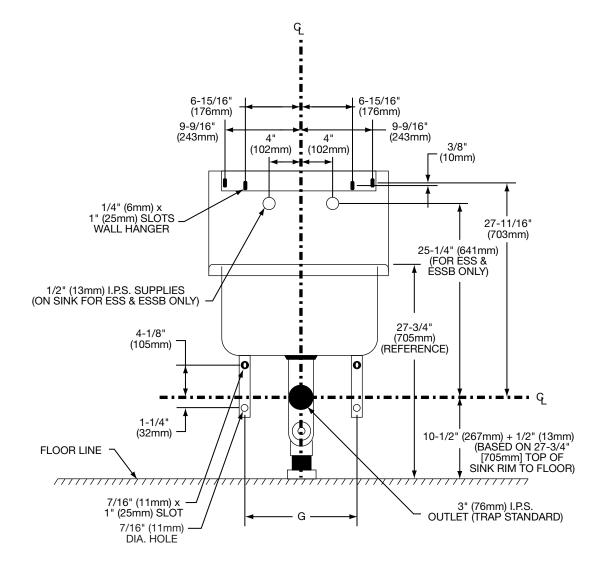

Model	G			
Number	in.	mm		
*2118C	13	330		
*2319C	14½	368		
*2520C	17	432		

*Above "G" dimensions refer to ESS, ESSB and ESSW Series.